



LAMPYHOTELOWE.PL

PRODUCT CATALOG

2022 - 2023

Lighting

LIGHT
FOR
THE
FUTURE





TECHNOLOGY SUPPORT



Product datasheet



Free product testing



Dialux



3D design



Enjoy exclusive rights



LED TRACK LIGHT



ZOOM PLUS
P003-008

ZOOM III
P009-012

FM
P013-018

MAGIC PLUS
P019-024

SUPER
P025-026




ARES
P027-028

ARES PLUS
P029-032

REMAX
P033-034

KONGMING
P035-036

MAGIC
P037-038

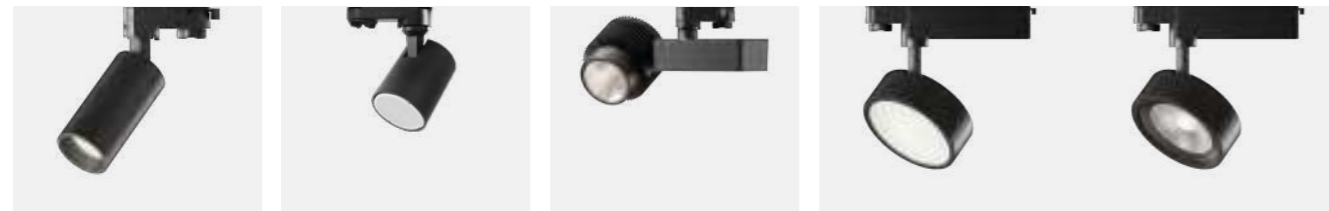

MINI
P039-040

GU10
P041-042

SIRIUS
P043-044

ARTEMIS
P045-046



GALAXY
P047-048

EAGLE EYE
P049-050

WARRIOR
P051-052

DZJ
P053-054

LED DOWN LIGHT (SMD)



RECTANGULAR
P055-062

ROUND
P067-068



ROUND
P063-066

ROUND
P069-070

CRESCENT
P071-074

XF
P075-078



DOB
P079-084

AEROLITE
P085-090

LDI
P091-092



GALAXY
P093-094

ARTEMIS
P095-096

TRACK LIGHT
DOWN LIGHT (SMD)
DOWN LIGHT (COB)
DOWN LIGHT (Surface&Pendant)
PANEL LIGHT
LINEAR LIGHT
BATTEN LIGHT
HIGH BAY LIGHT
TRACK SYSTEM MAGNET

LED DOWN LIGHT (COB)



RECTANGULAR
P.099-100

ROUND
P.101-104



AEROLITE
P.105-110

STAR
P.111-112

CRESCENT
P.113-114

MINI
P.115-118



EAGLE EYE
P.119-120

GALAXY
P.121-122

KING KONG
P.123-128

MAMBA
P.129-130



RAINBOW
P.131-134

SPRING
P.135-136

SPRING
P.137-138



SPRING
P.137-138


LUX
P.139-142

LED DOWN LIGHT (COB)



GALAXY
P.143-144

VELA
P.145-150

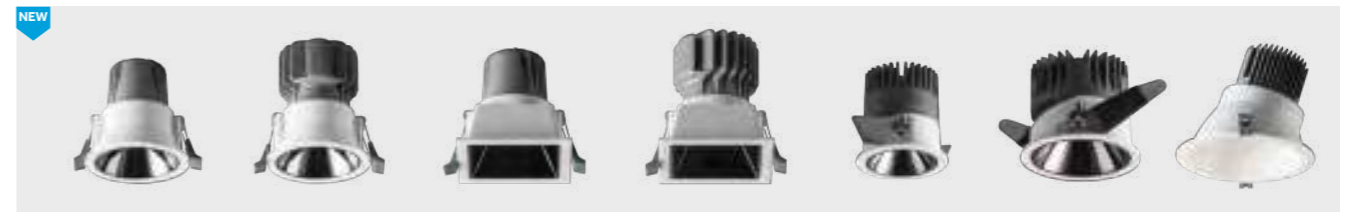


VELA
P.151-158



VELA
P.161-166

ARTEMIS
P.167-168

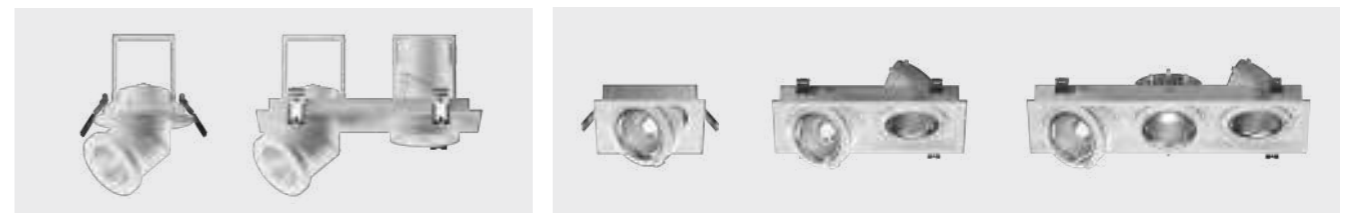

WARRIOR
P.169-170

RS
P.171-172



LUX
P.173-176

TY
P.177-178

TRACK LIGHT
DOWN LIGHT (SMD)
DOWN LIGHT (COB)
DOWN LIGHT (Surface&Pendant)
PANEL LIGHT
LINEAR LIGHT
BATTEN LIGHT
HIGH BAY LIGHT
TRACK SYSTEM MAGNET


LED DOWN LIGHT (COB)




SOAR
P.179-180



SOAR
P.181-182

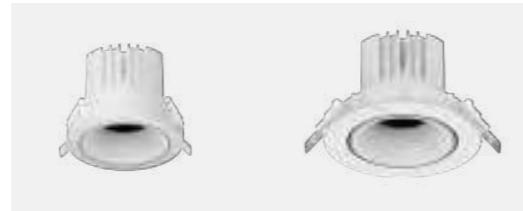

VAST
P.183-184

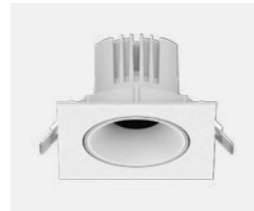

VAST
P.185-186




VAST
P.187-190



VAST
P.191-192



STARS A
P.193-202

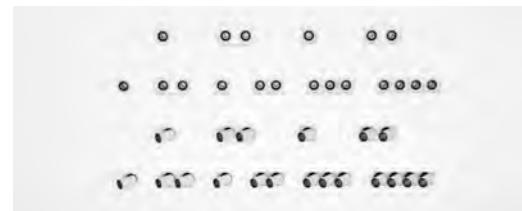


STARS B
P.203-208



STARS C
P.209-214

LED DOWN LIGHT (Surface & Pendant)

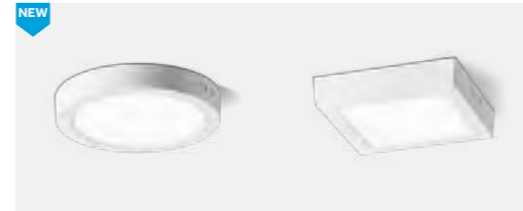


DOB
P.215-218



XF
P.219-220



ZY
P.221-222



KING KONG
P.223-224



XF
P.225-226



ARTEMIS
P.227-228



MINI
P.229-230



ZY
P.231-232



MINI
P.233-234



EAGLE EYE
P.235-236



ARTEMIS
P.237-238




DZJ
P.239-240



GALAXY
P.241-242



GU10
P.243-246



GU10
P.243-246



FIREFLY
P.247-248

TRACK LIGHT

DOWN LIGHT (SMD)

DOWN LIGHT (COB)

DOWN LIGHT (Surface&Pendant)

PANEL LIGHT


LINEAR LIGHT

BATTEN LIGHT


HIGH BAY LIGHT

TRACK SYSTEM MAGNET

LED **PANEL** LIGHT



PL-SP0603M
P.249-250




PL-SP0606M
P.249-250



PL-SP1203M
P.249-250



PL-SP1206M
P.249-250

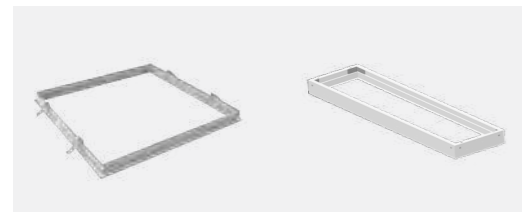

Accessory
P.251-252

LED **LINEAR** LIGHT



LINE-A-SL1204-S
P.255-256



LINE-B-SL1204-S
P.255-256



LINE-A-EX1204-S
P.257-258



LINE-B-EX1204-S
P.257-258



LINE-TR1205-S
P.259-260



LINE-SL1205-S
P.261-262



LINE-EX1205-S
P.261-262

LED **BATTEN** LIGHT



BT-001-600
P.263-264



BT-001-1200
P.263-264



BT-002-1200
P.263-264

LED **HIGH BAY** LIGHT



KD-006-S
P.265-268



BDHB-S-A
P.271-272




BDHB-S-B
P.271-272




KD-003-S
P.273-274



KD-003-C
P.273-274

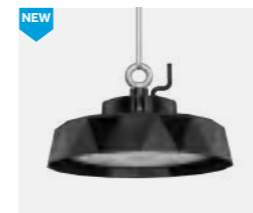

KD-007-A
P.275-276

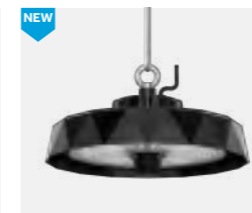

KD-007-B
P.275-276

TRACK LIGHT

DOWN LIGHT (SMD)

DOWN LIGHT (COB)

DOWN LIGHT (Surface&Pendant)

PANEL LIGHT

LINEAR LIGHT

BATTEN LIGHT

HIGH BAY LIGHT

TRACK SYSTEM MAGNET

LED TRACK SYSTEM MAGNET



OBS-601010 P.277-286 **OBS-601110** P.277-286 **OBS-601310** P.277-286 **OBS-601901** P.277-286 **OBS-601902** P.277-286




OBS-601201-C P.287-288 **OBS-601202-C** P.287-288 **OBS-601203-C** P.287-288 **OBS-601201-1-C** P.289-290 **OBS-601202-1-C** P.289-290



OBS-601203-1-C P.289-290 **OBS-601211-C** P.291-292 **OBS-601212-C** P.291-292 **OBS-601213-C** P.291-292 **OBS-601221-C** P.293-294



OBS-601223-C P.293-294 **OBS-601225-C** P.293-294 **OBS-601231-C** P.293-294 **OBS-601251-C** P.295-296 **OBS-601252-C** P.295-296

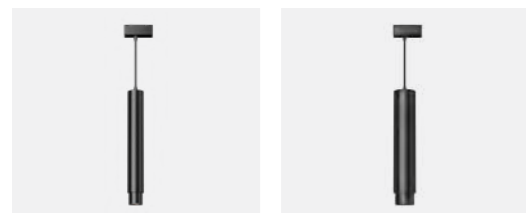

OBS-601241-C P.297-298 **OBS-601242-C** P.297-298

LED TRACK SYSTEM MAGNET



OBS-603010 P.299-300 **OBS-603110** P.299-300 **OBS-603310** P.299-300 **OBS-603901** P.299-300 **OBS-603902** P.299-300



OBS-603903 P.299-300 **OBS-603904** P.299-300 **OBS-603202-C** P.301-302 **OBS-603203-C** P.301-302 **OBS-603204-C** P.301-302




OBS-603211-C P.303-304 **OBS-603212-C** P.303-304 **OBS-603213-C** P.303-304 **OBS-603222-C** P.305-306 **OBS-603224-C** P.305-306



OBS-603251-C P.307-308 **OBS-603252-C** P.307-308 **OBS-603241-C** P.309-310

TRACK LIGHT
DOWN LIGHT (SMD)
DOWN LIGHT (COB)
DOWN LIGHT (Surface&Pendant)
PANEL LIGHT
LINEAR LIGHT
BATTEN LIGHT
HIGH BAY LIGHT
TRACK SYSTEM MAGNET

LED TRACK LIGHT

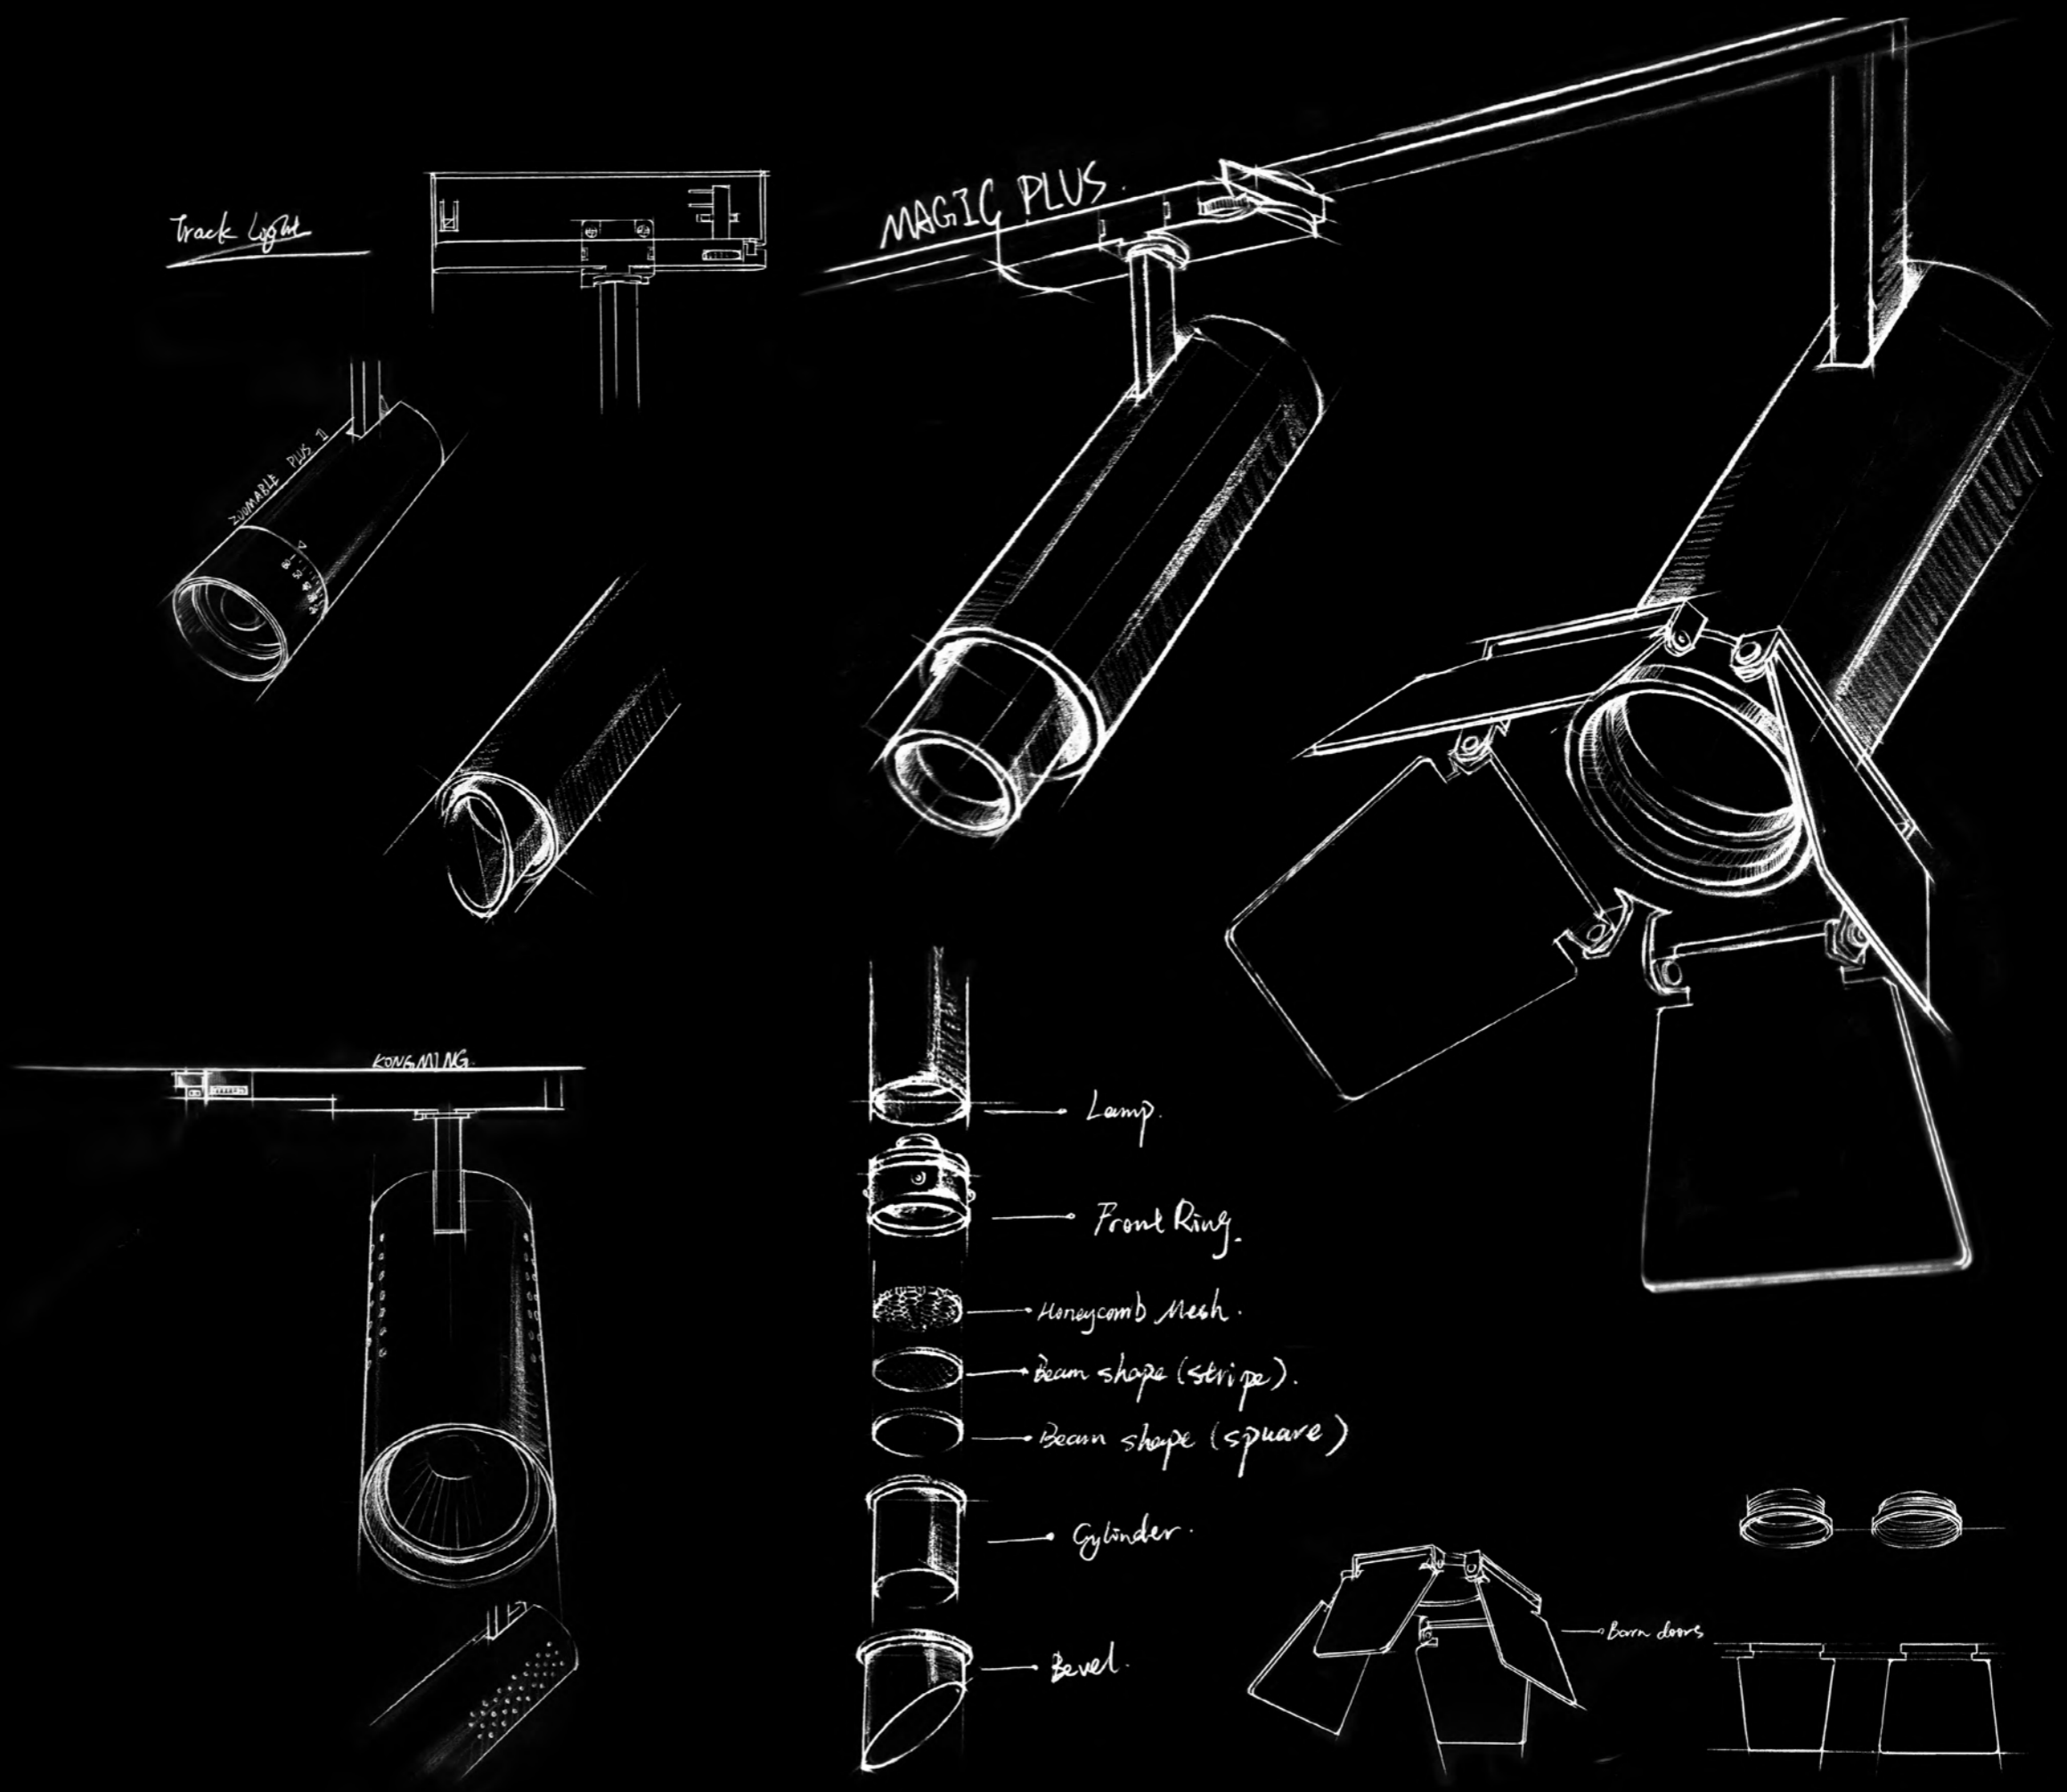

LED Track Light can create a partial and unique atmosphere to show the target objects, which is mainly used for accent lighting like commercial stores, museum and gallery, etc. The flexible track head can be adjusted to light the objects which are the key display. Professional optics can offer you a comfortable lighting effect.



TRACK LIGHT

ZOOM PLUS

LED Track Light



TRACK LIGHT



3-CCT optional by switch

2700K/4000K/6000K


With simple and elegant design, supreme integrated aluminum body with great heat dissipation.



10%~100% dimmable (Custom made)

Switch operated brightness dimmable 10%~100%, Meet different lighting needs.



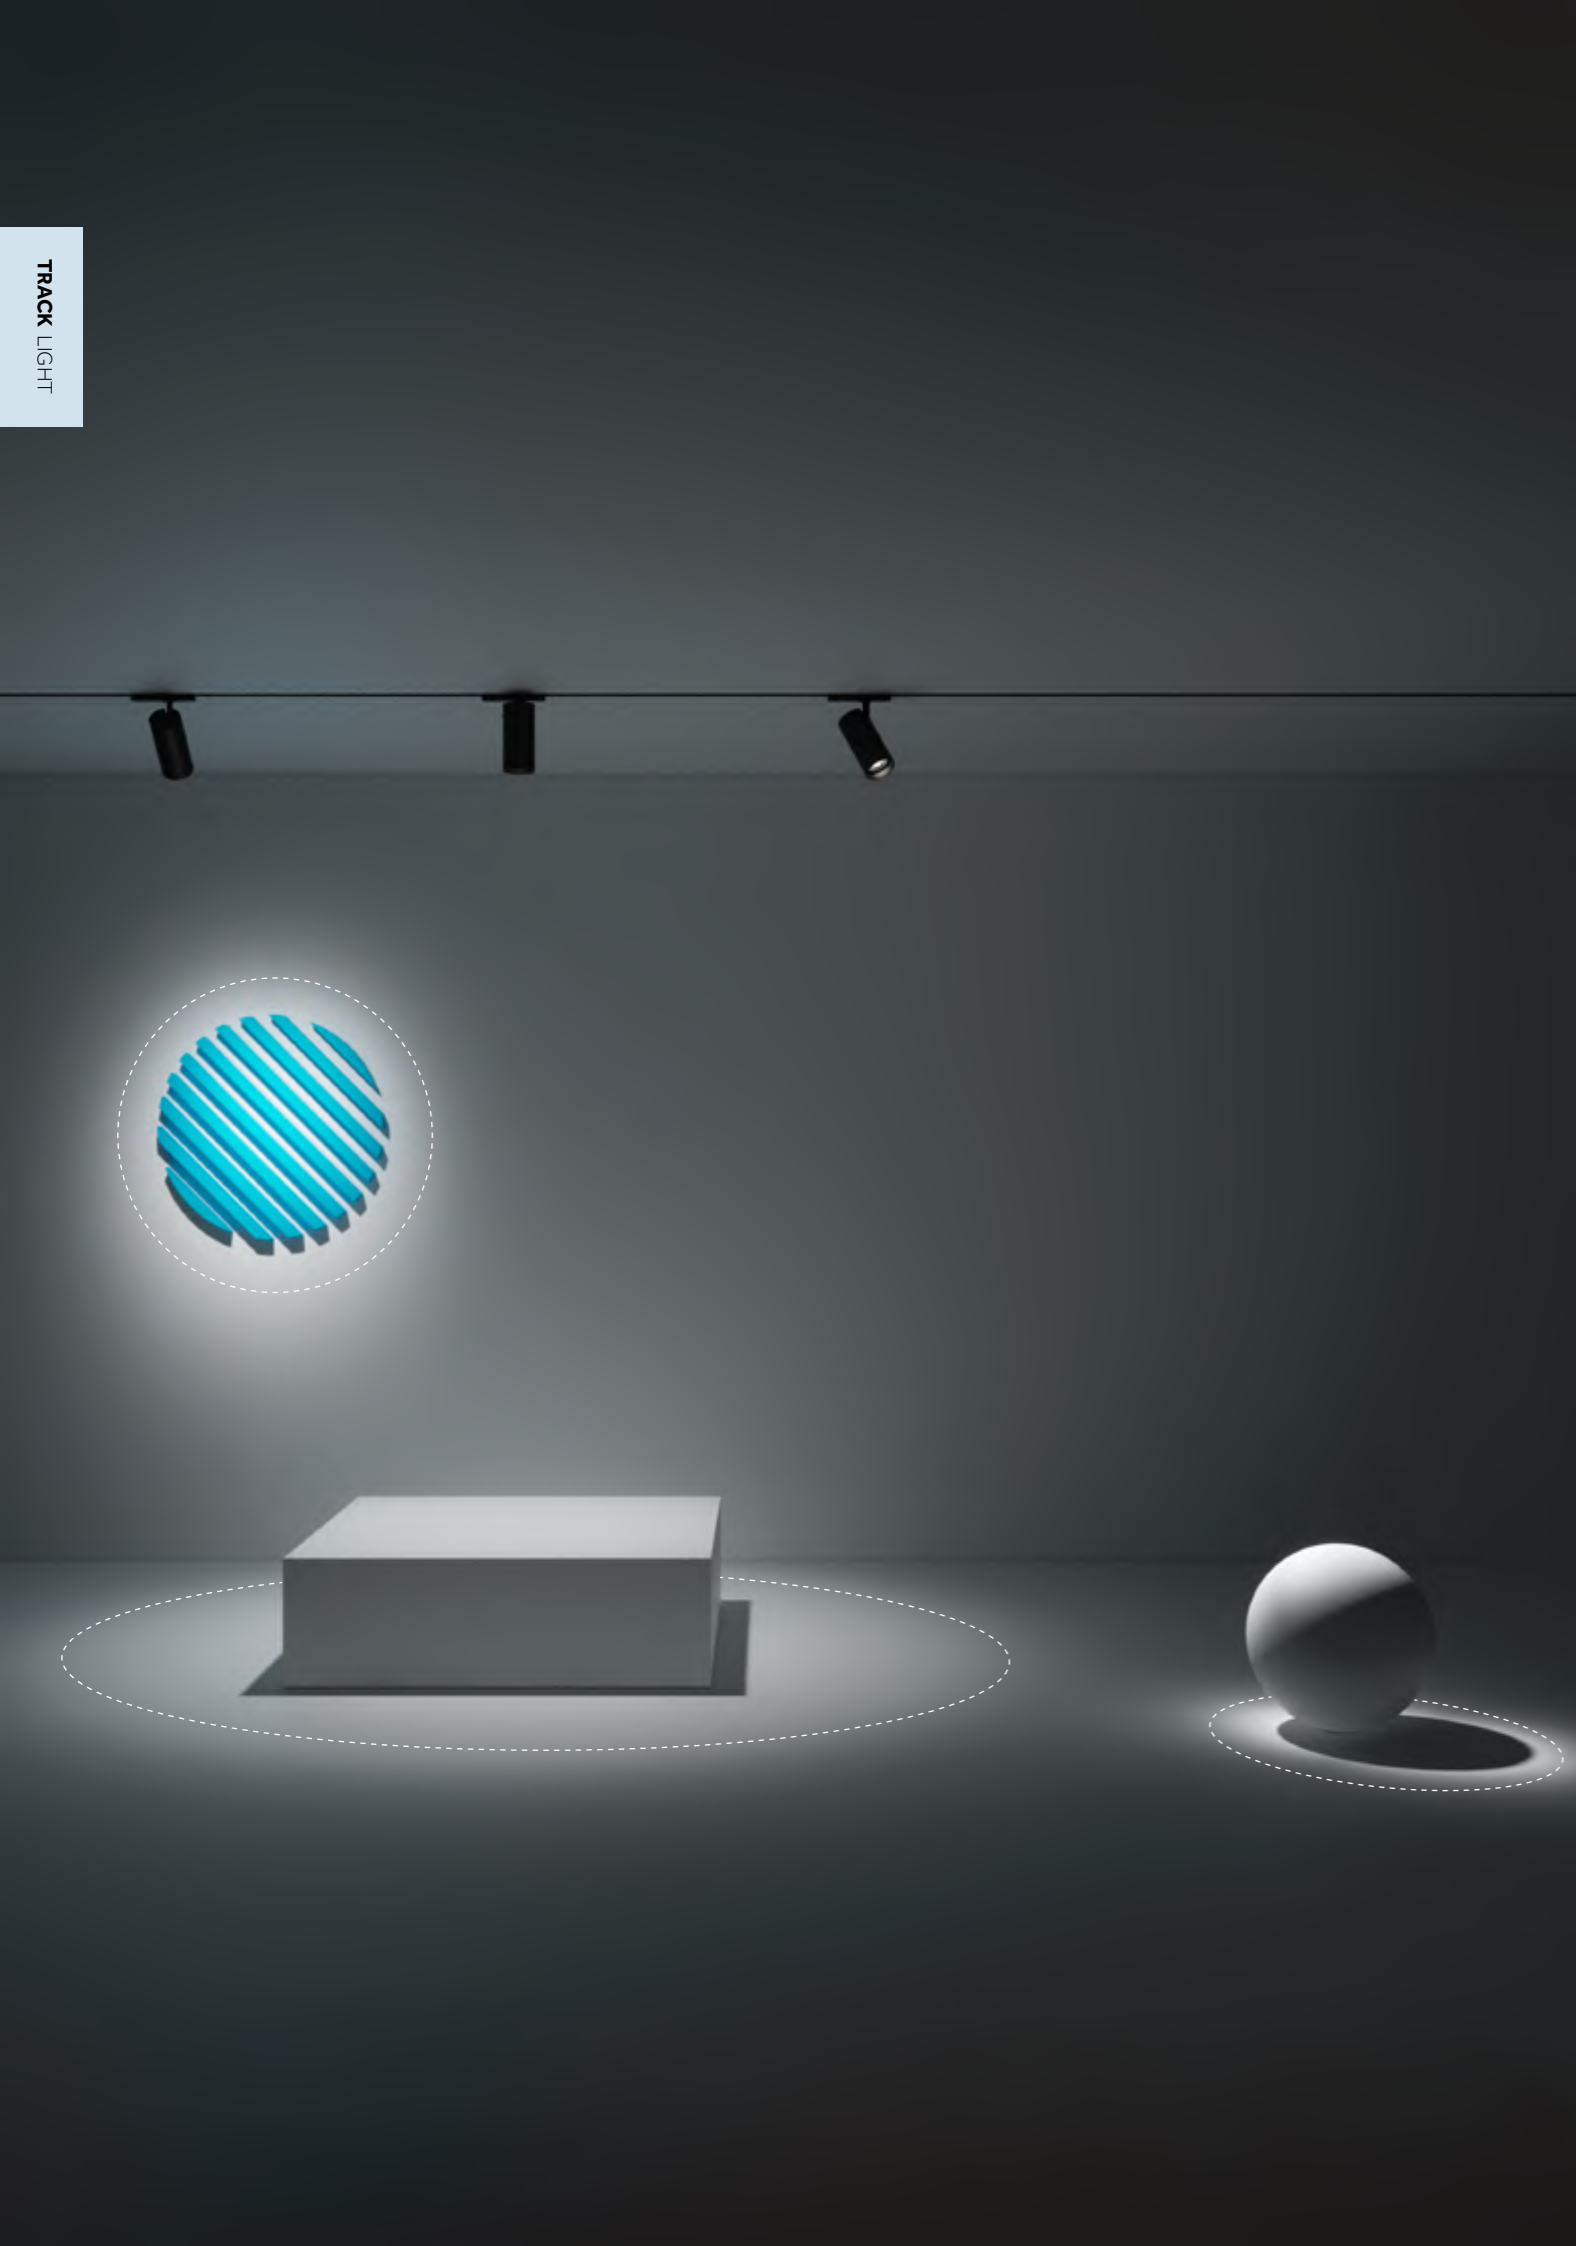

**Narrow
20°**




**Wide
60°**

The track light is multi-functional design: adjustable beam angle, changeable color temperature and adjustable brightness, which can greatly help you to reduce pressure of inventory and cost. Professional optical zoom lens offers a wide range adjustable beam angle. Sliding built-in switch can reach stepless dimming. It is the best choice to use in projects like museum, gallery, and so on.



	BJ-TR7223-C	BJ-TR8026-C	BJ-TR9426-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	20W/25W/30W	25W/30W/35W/40W	25W/30W/35W/40W
Beam Angle	20°-60°	20°-60°	20°-60°
Lumen (lm)	1856/2467/3011	3232/3703/4457/4894	3232/3703/4457/4894
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø72x228	Ø80x228	Ø94x230
N.W/PC (kgs)	0.81	0.82	1.25
Q'ty/CTN (pcs)	16	12	9
Driver	Track adaptor with integrated LED driver	Track adaptor with integrated LED driver Driver box Built-in driver	Track adaptor with integrated LED driver Built-in driver

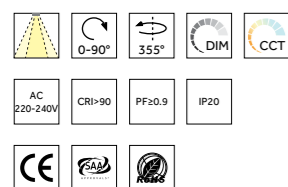


FINISH: White Black

CCT: 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

ZOOM PLUS Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. Wide-range adjustable beam angle 20°-60°. Switch operated brightness dimmable 10%-100%.


Dimension(mm)

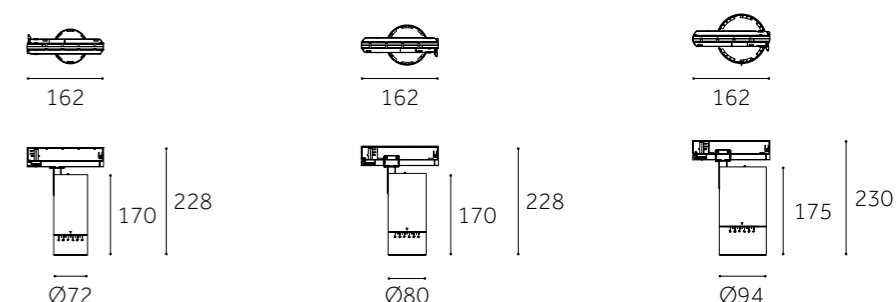



ZOOM III

LED Track Light

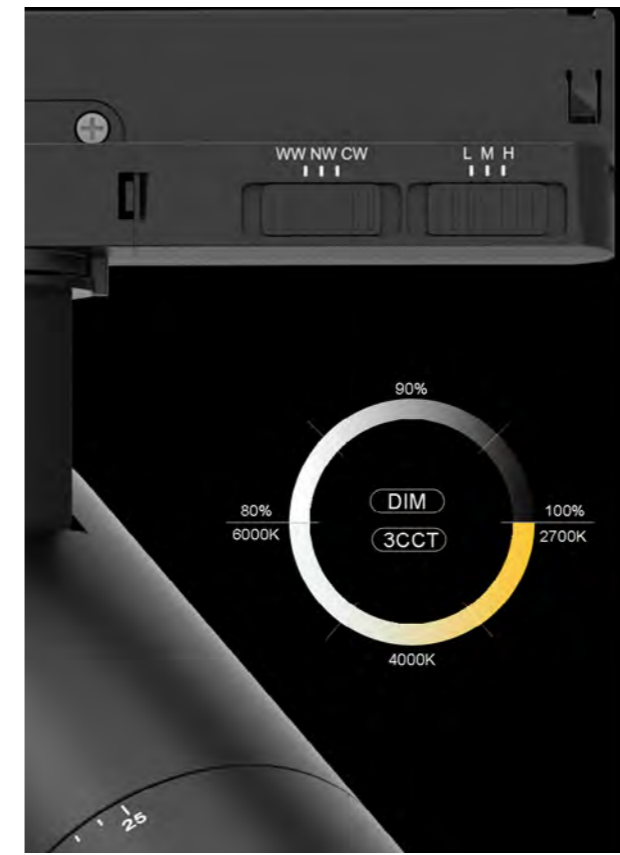

80%~100% dimmable
3-CCT changeable





3-CCT Adjustable Color Temperature
Brightness Adjustment

Adjustable Beam Angle

TRACK LIGHT



	BJ-TR72-COB	BJ-TR80-COB
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	20W/25W	30W/35W/38W
Beam Angle	25°-55°	25°-60°
Lumen (lm)	2068/2492	3201/3808/4104
Cut-out (mm) 	/	/
Size (DxHmm)	Ø72x210	Ø80x250
N.W/PC (kgs)	0.58	0.8
Q'ty/CTN (pcs)	16	16





FINISH: White Black **CCT:** 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

BJ Series LED tracklight with high efficiency LED COB chip. Wide-range adjustable beam angle 20°-60°. Switch operated brightness dimmable 10%-100% and 3-CCT optional.

Dimension(mm)

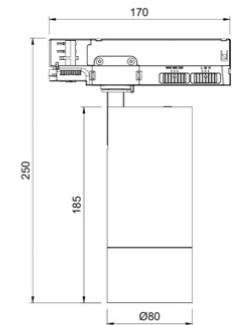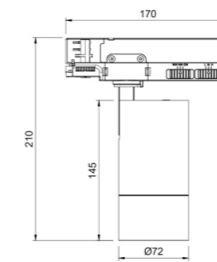



FM
LED Track Light



Patent driver



3-CCT optional by switch
2700K/4000K/6000K



APP Control




The built-in dimming switch on the integrated driver adaptor, which can adjust the brightness of 100%, 90% and 80%.






DIY Design

Multi-accessories for optional

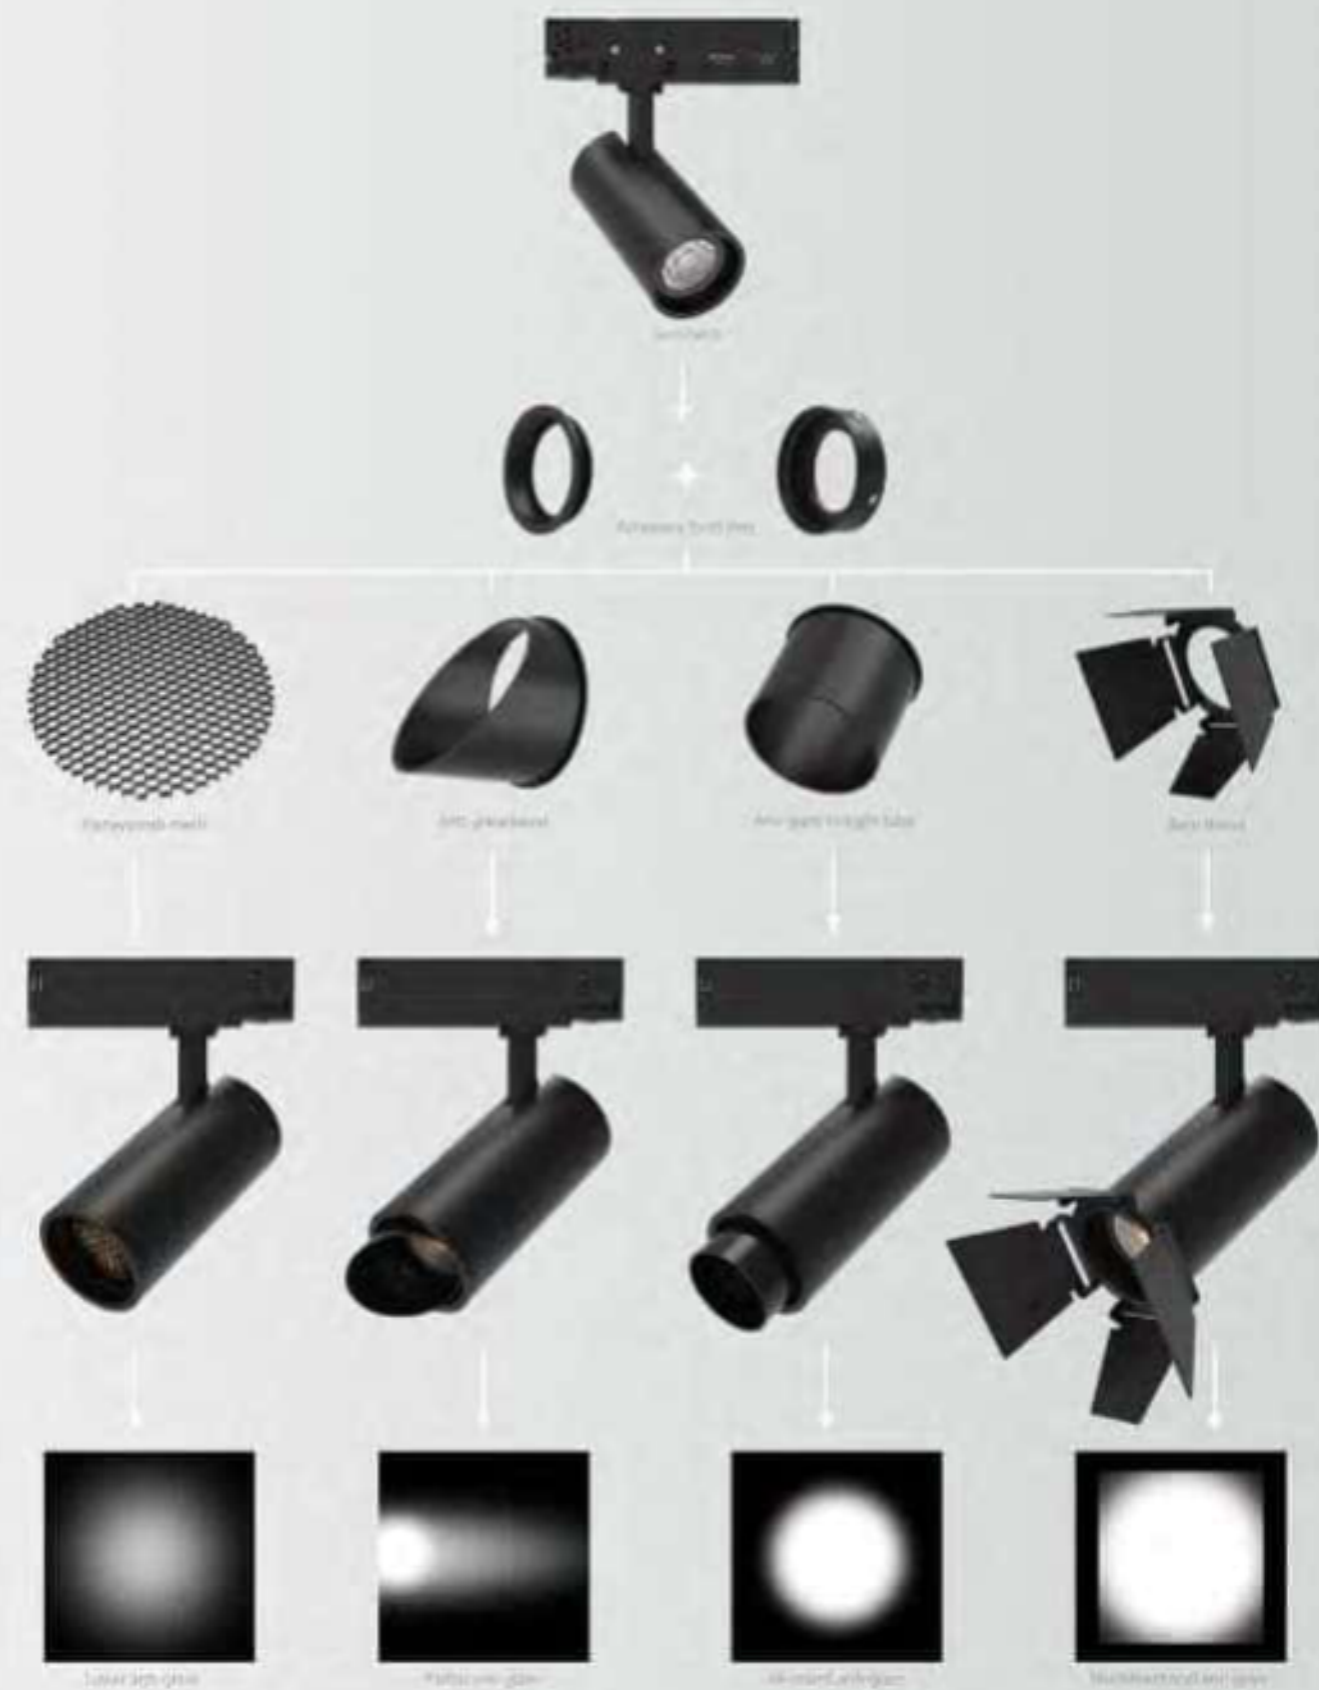



	FM-TR65-COB	FM-TR75-COB	FM-TR85-COB
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	20W	30W	40W
Beam Angle	26°/35°/55°	26°/35°/55°	26°/35°/55°
Lumen (lm)	2235	3315	4420
Cut-out (mm)	/	/	/
Size (DxHmm)	Ø65x210	Ø75x210	Ø85x210
N.W/PC (kgs)	0.725	0.57	0.43
Q'ty/CTN (pcs)	12	12	12




FINISH: White Black

CCT: 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

FM Series LED tracklight with high efficiency LED COB chip. 3 CCT and Dimming types for optional. DIY design without any tool which easy to change different accessories to meet your different requirements.

Dimension(mm)

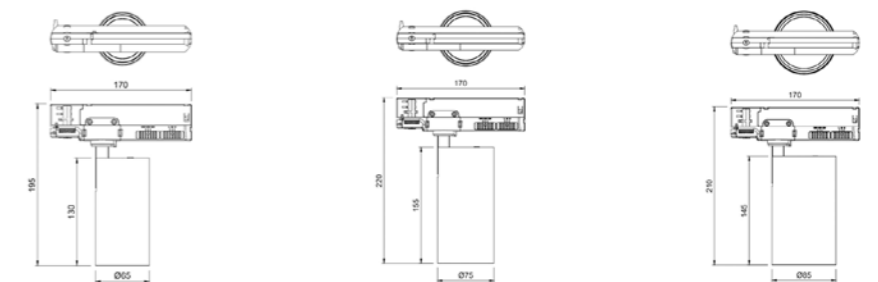



TRACK LIGHT

TRACK LIGHT


MAGIC PLUS

LED Track Light



Multiple Accessories

Stay flexible. Simply change the light distribution yourself at any time—without tools and with hands.

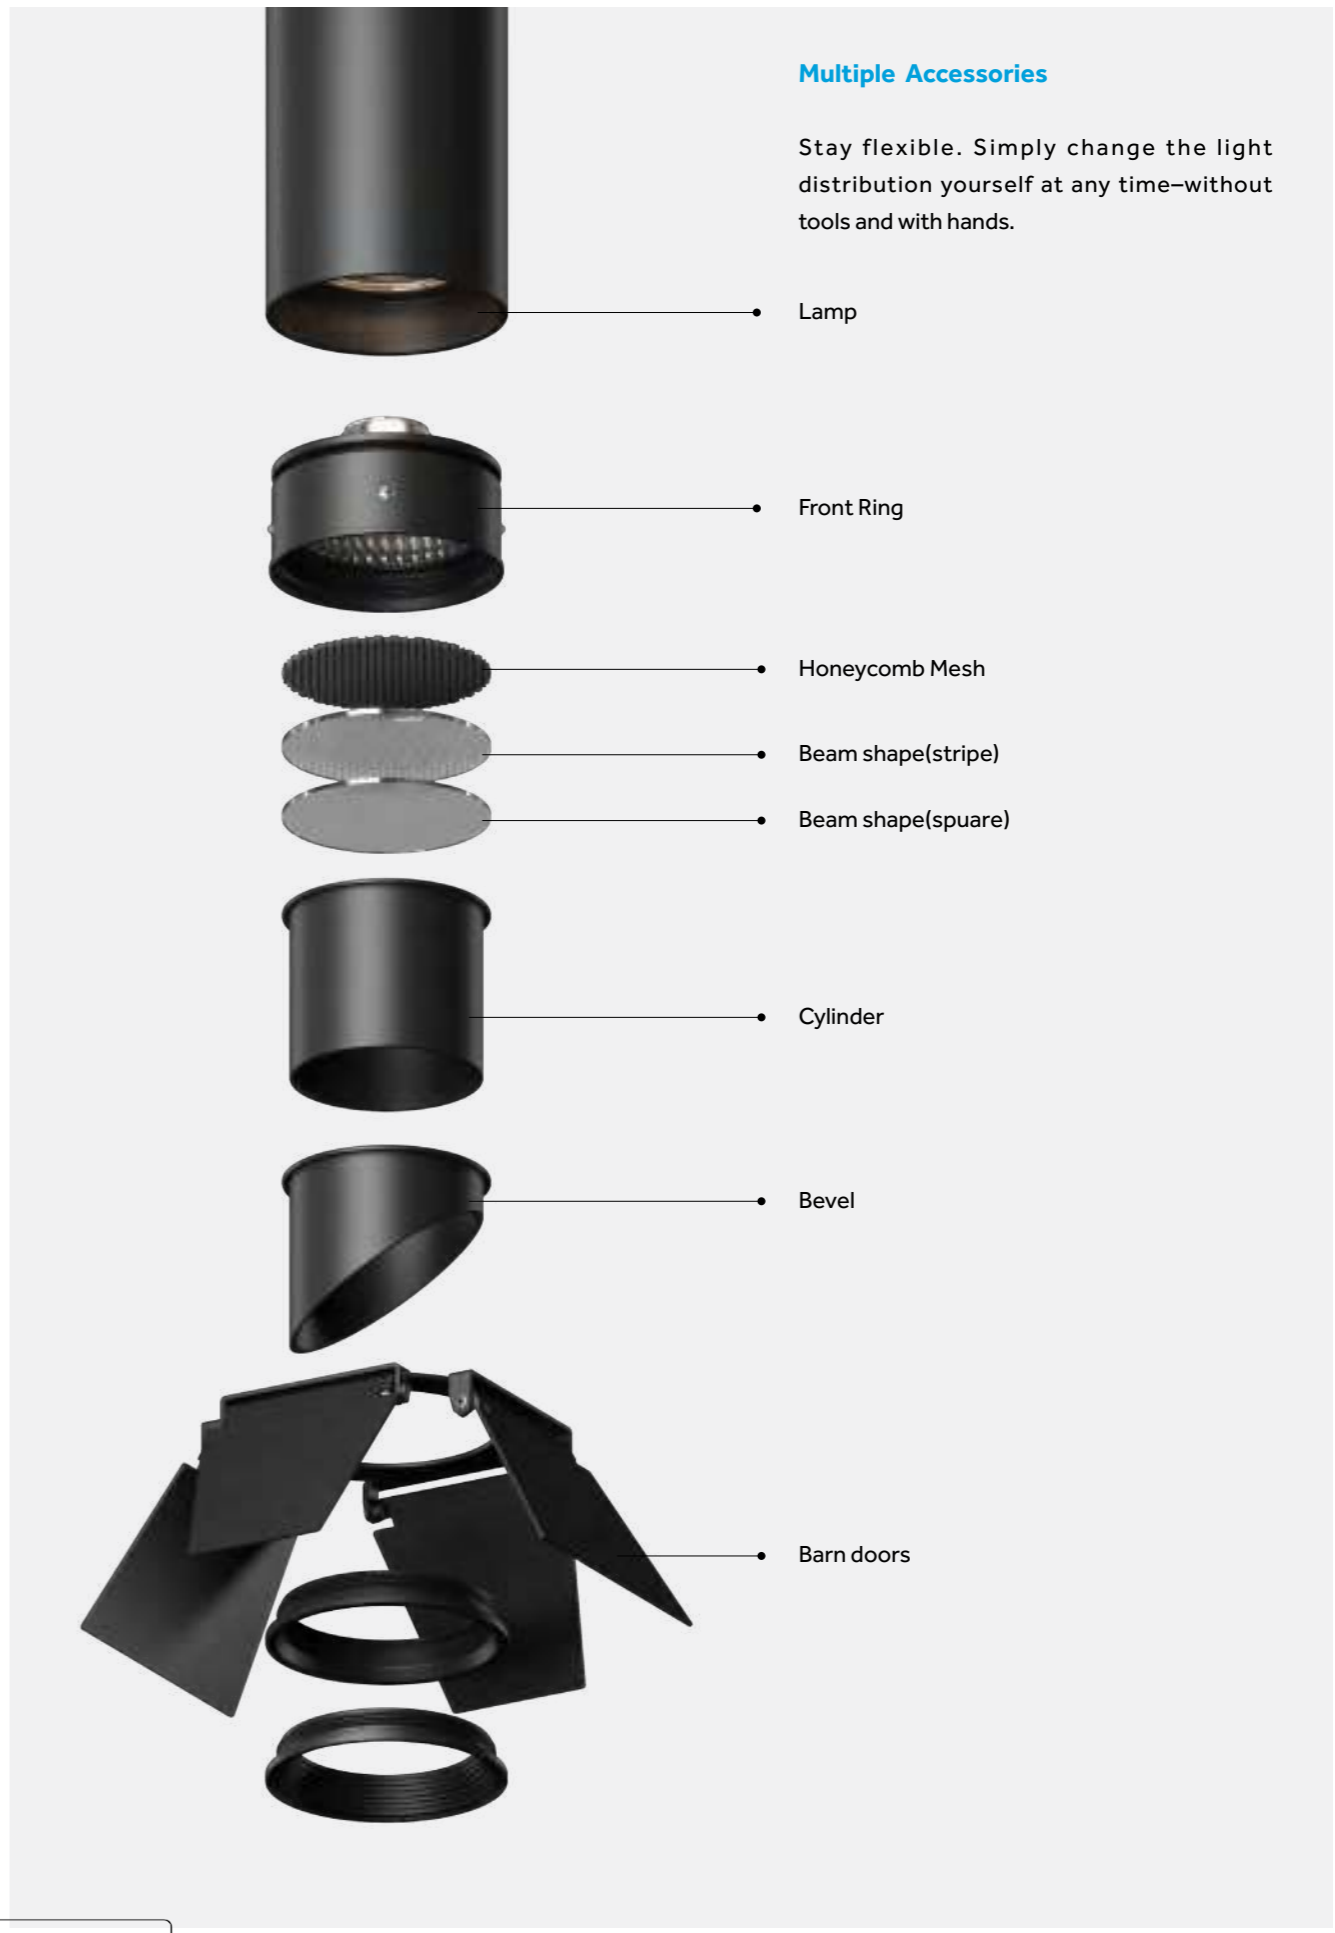

Lamp

Front Ring

Honeycomb Mesh

Beam shape(stripe)

Beam shape(square)

Cylinder


Bevel

Barn doors





	MS-TR8026-C	MS-TR9426-C
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	30W/35W/40W	30W/35W/40W
Beam Angle	20°/26°/36°/45°/60°	15°/24°/36°
Lumen (lm)	3278/3824/4370	3278/3824/4370
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø80x243	Ø94x260
N.W/PC (kgs)	0.86	1.1
Q'ty/CTN (pcs)	8	12





FINISH: White Black

CCT: 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting


MAGIC PLUS Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. Multi-optical accesories, quick assembly and replacment. 1-CCT and 3-CCT optional (2700K&4000K&6000K).

Dimension(mm)

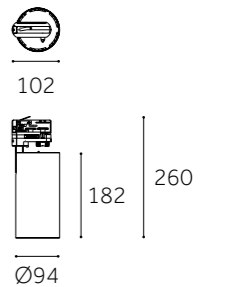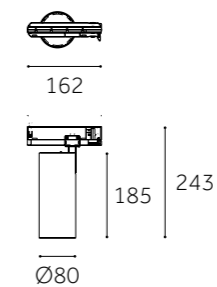




SP-TR85-C

Type	Adjustable 90°+355°
Wattage	40W
Beam Angle	22°/28°/38°/56°
Lumen (lm)	3524
Cut-out (mm) 	/
Size (DxHmm)	Ø85x220
N.W/PC (kgs)	0.68
Q'ty/CTN (pcs)	12



Driver on board




FINISH: White Black

CCT: 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting


SUPER Series LED track light with high efficiency LED COB chip, driver on board design with best dissipation performance. 3 CCT, high CRI, high quality optical lens, provide you different and special needs.

Dimension(mm)

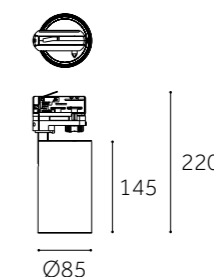



	ZS-TR62-C	ZS-TR72-C
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	15W	30W
Beam Angle	23°/38°/45°/60°	23°/38°/45°/60°
Lumen (lm)	1725	3450
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø62x240	Ø72x250
N.W/PC (kgs)	0.5	0.7
Q'ty/CTN (pcs)	20	16



FINISH: White Black

CCT: 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

ARES Series LED tracklight with high efficiency LED COB chip. 1-CCT and 3-CCT optional (2700K&4000K&6000K). Rotatable 355°& tiltable 90°.

Dimension(mm)



TRACK LIGHT



TRACK LIGHT



ARES PLUS

LED Track Light

RGB APP CONTROL




LAMPYHOTELOWE.PL



Surface mounted or recessed

	ZS-TR65-C	ZS-TR75-C
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	10W/15W/20W	30W/35W/40W
Beam Angle	26°/36°/55°	26°/36°/55°
Lumen (lm)	1120/1650/2200	3323/3850/4420
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø65x238	Ø75x268
N.W/PC (kgs)	0.5	0.7
Q'ty/CTN (pcs)	16	16





FINISH: ○ White ● Black

CCT: 2700K  6000K

DIMMING: Triac 1-10V DALI Smart lighting


ARES PLUS Series LED tracklight with high efficiency LED COB chip. CRI≥90. 1-CCT and 3-CCT optional (2700K&4000K&6000K). A variety of installation options, provide you different and special needs.

Dimension(mm)

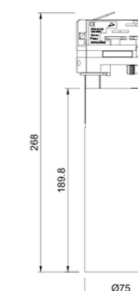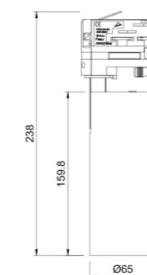



	FF-TR60-C	FF-TR70-C	FF-TR85-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	15W/20W	25W/30W	30W/35W/40W
Beam Angle	16°/24°/32°/48°/58°	16°/24°/32°/48°/58°	16°/24°/32°/48°/58°
Lumen (lm)	1515/2020	2770/3470	3030/3535/4040
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø60x172.5	Ø70x192.5	Ø85x198.5
N.W/PC (kgs)	0.44	0.64	0.91
Q'ty/CTN (pcs)	20	16	12



FINISH: White Black

CCT: 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

REMEX Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. Soft light, multi beam angle optional. 1-CCT and 3-CCT optional (2700K&4000K&6000K).

Dimension(mm)



162



Ø60

120 172.5



162



Ø70

140 192.5



162




Ø85

146 198.5





	KM-TR8026-C	KM-TR8026-C&D
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	30W/35W/40W	30W/35W/40W
Beam Angle	22°/36°/48°/60°	20°/30°/40°/55°
Lumen (lm)	3030/3535/4040	3540/4250/4640
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø80x242.5	Ø80x242.5
N.W/PC (kgs)	0.6	0.6
Q'ty/CTN (pcs)	16	16







FINISH: ○ White ● Black

CCT: 2700K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting


KONGMING Series LED tracklight with high efficiency LED COB chip, and external intergrated driver wiht best dissipation performance. 1-CCT and 3-CCT optional (2700K&4000K&6000K). Rotatable 355°& tiltable 90°.

Dimension(mm)





	BJ-CX90A-C	BJ-ZH90B-C	BJ-PG90C-C
Type	Adjustable 90°+350°	Adjustable 90°+350°	Adjustable 90°+350°
Wattage	30W	30W	30W
Beam Angle	15°-46°	15°/24°/36°	28°x75°
Lumen (lm)	2850	2870	2430
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø93x269.5	Ø90x246	Ø90x246
N.W/PC (kgs)	1.22	1.06	1.03
Q'ty/CTN (pcs)	12	12	12




FINISH: White Silver Black **CCT:** 2700K 6000K

DIMMING: Triac 1-10V DALI Smart lighting


MAGIC Series with high efficiency COB. Beam angle could adjusted from 15° to 46° freely, smoothly and accurately. Lens could be changed fast according to different optical color film: red/yellow/blue/green/orange/purple/tawny.

Dimension(mm)

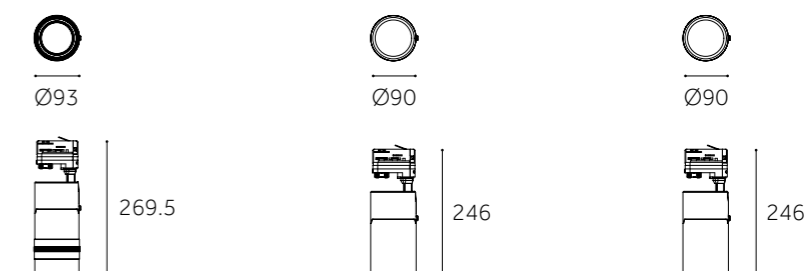



	MN-TR55M-C	MN-TR63M-C	MN-TR75M-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	9W	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°	23°/38°/45°
Lumen (lm)	915	1853	3046
Cut-out (mm) ⓘ	/	/	/
Size (DxLmm)	Ø55x185	Ø63x213	Ø75x233
N.W/PC (kgs)	0.34	0.56	0.77
Q'ty/CTN (pcs)	20	20	20




FINISH: White Silver Black **CCT:** 3000K 4000K 6000K

OPTIONAL: White Black Golden Silver

DIMMING: Triac 1-10V DALI Smart lighting


MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels, restaurants and other public buildings.

Dimension(mm)

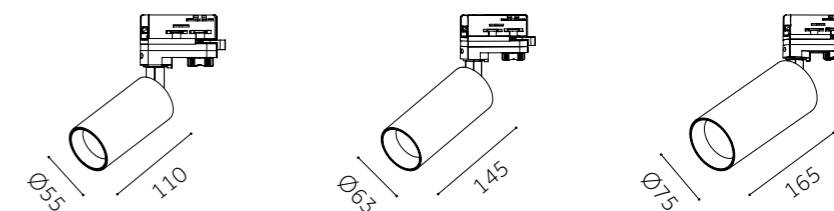



OBS-TLS-01

Type	Adjustable 90°+350°
Wattage	/
Beam Angle	/
Lumen (lm)	/
Cut-out (mm) 	/
Size (DxHmm)	Ø60x140
N.W/PC (kgs)	0.2
Q'ty/CTN (pcs)	50

Easy Installation:

Using the sucker to put GU10 LED bulb into the housing easily




FINISH: White Black

DIMMING: Non-Dimmable


GU10 Series easy to rotate the angle 350° and tilting 90°, which can meet your needs at various angles. Decoration is no longer limited. Changeable GU10 light source.

Dimension(mm)

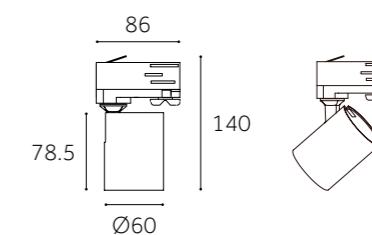



	TLX-TR2611M-C	TLX-TR2611M-CU
Type	Adjustable 170°+350°	Adjustable 170°+350°
Wattage	15W/20W/24W/30W	15W/20W/24W/30W
Beam Angle	15°/24°/38°/45°/60°	15°/24°/38°
Lumen (lm)	2128/2875/3588/4313	2128/2875/3588/4313
Cut-out (mm) ⓘ	/	/
Size (WxLxHmm)	260xØ105x170	260xØ105x170
N.W/PC (kgs)	1.5	1.5
Q'ty/CTN (pcs)	9	9





FINISH: ● Black

CCT: 3000K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting


SIRIUS Series light with COB LED chip. 15°/24°/38°/45°/60° beam angle. UGR<19.

Dimension(mm)

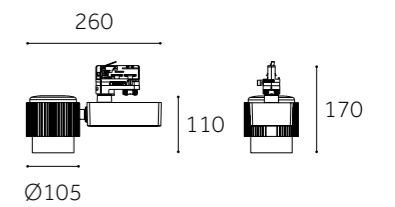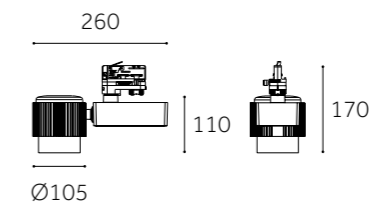



	NS-TR2017M-S	NS-TR2017M-C
Type	Adjustable 60°+355°	Adjustable 60°+355°
Wattage	10W/15W/20W/25W	10W/15W/20W/25W
Beam Angle	95°	15°/25°/40°
Lumen (lm)	1116/1710/2332/2841	1145/1760/2399/2990
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø130x170	Ø130x170
N.W/PC (kgs)	0.94	0.94
Q'ty/CTN (pcs)	12	12







FINISH: ○ White ● Silver ● Black **CCT:** 3000K — 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting


ARTEMIS Series products design with various installation options of surface-mounted, recessed, track and pendant. It provides excellent lighting effect for commercial space such as supermarkets and shops. 350 degree rotatable, 60 degree adjustable, the lamp head can be stretched to meet the adjustment of the different area. Button locked the angle, safe and convenient. 15°,25°,40° beam angle for COB version, 95° beam angle for SMD version.


Dimension(mm)





JL-TR04RM-C&D

Type	Adjustable 90°+355°
Wattage	9W/12W/14W/21W
Beam Angle	16°/24°/50°
Lumen (lm)	1081/1415/1679/2450
Cut-out (mm) 	/
Size (DxHmm)	Ø130x239
N.W/PC (kgs)	1.5
Q'ty/CTN (pcs)	8




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting


GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminarie color can be black, white and silver for optional. Durable die-casting aluminum body with heat sink. High efficiency and brand COB LED chip. Multi-reflector system for optional beam angle.

Dimension(mm)

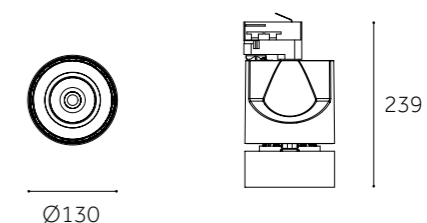



	BJ-TR60A-C	BJ-TR60B-C
Type	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	10W/15W/20W	10W/15W/20W
Beam Angle	15°-70°	15°-70°
Lumen (lm)	1067/1725/2536	1067/1725/2536
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø60x256.6	214x100x133.5
N.W/PC (kgs)	0.9	0.8
Q'ty/CTN (pcs)	16	18





FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

EAGLE EYE Series with high efficiency brand COB LED chip, build-in driver. Aluminum die-casting body and heat sink which is better air dissipation. Adjustable beam angle from 15°-70°.


Dimension(mm)

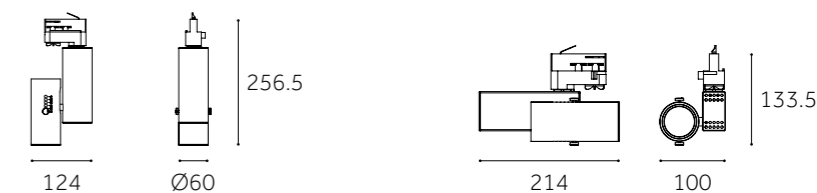

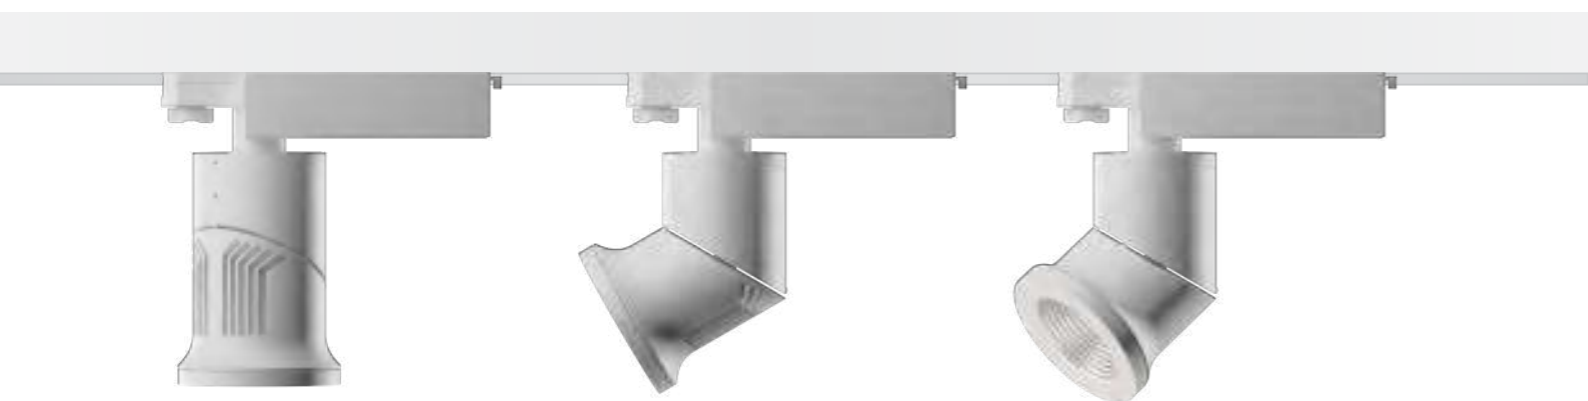

WS-TR2022M-C

Type	Adjustable 60°+355°
Wattage	10W/15W/20W/25W
Beam Angle	15°/30°/40°
Lumen (lm)	1127/1711/2332/2865
Cut-out (mm) ⓘ	/
Size (DxHmm)	Ø100x215
N.W/PC (kgs)	0.83
Q'ty/CTN (pcs)	12




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

WARRIOR Series with COB LED chip, external driver. DIY family series. LED recessed Downlight, LED grille light and LED track light. Rotatable angle 355° and titable angle 90°. Luminaire color can be black, white and silver for optional. Three beam angle 15°/30°/40° for your selection by change of the reflector cup inside.


Dimension(mm)

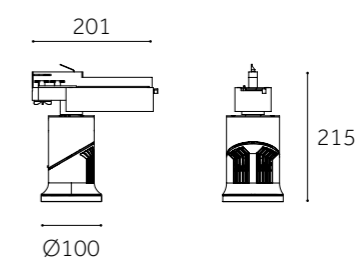



DZJ-TR2011M-S

Type	Adjustable 140°+350°
Wattage	20W/28W/38W/48W
Beam Angle	95°
Lumen (lm)	2760/3864/5244/6624
Cut-out (mm)	/
Size (WxLxHmm)	204x75x251
N.W/PC (kgs)	1.48
Q'ty/CTN (pcs)	8




FINISH: White+Black Black

CCT: 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

DZJ Series with the large adjustable angle 140° of lighting direction, the downlight meet different light require of most users. With high lumen SMD chip, CRI>80.

Dimension(mm)

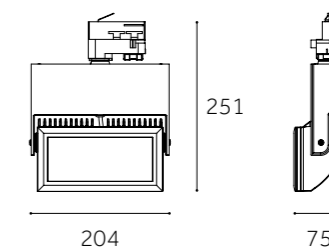




DOWN LIGHT (SMD)

RECTANGULAR

LED Downlight

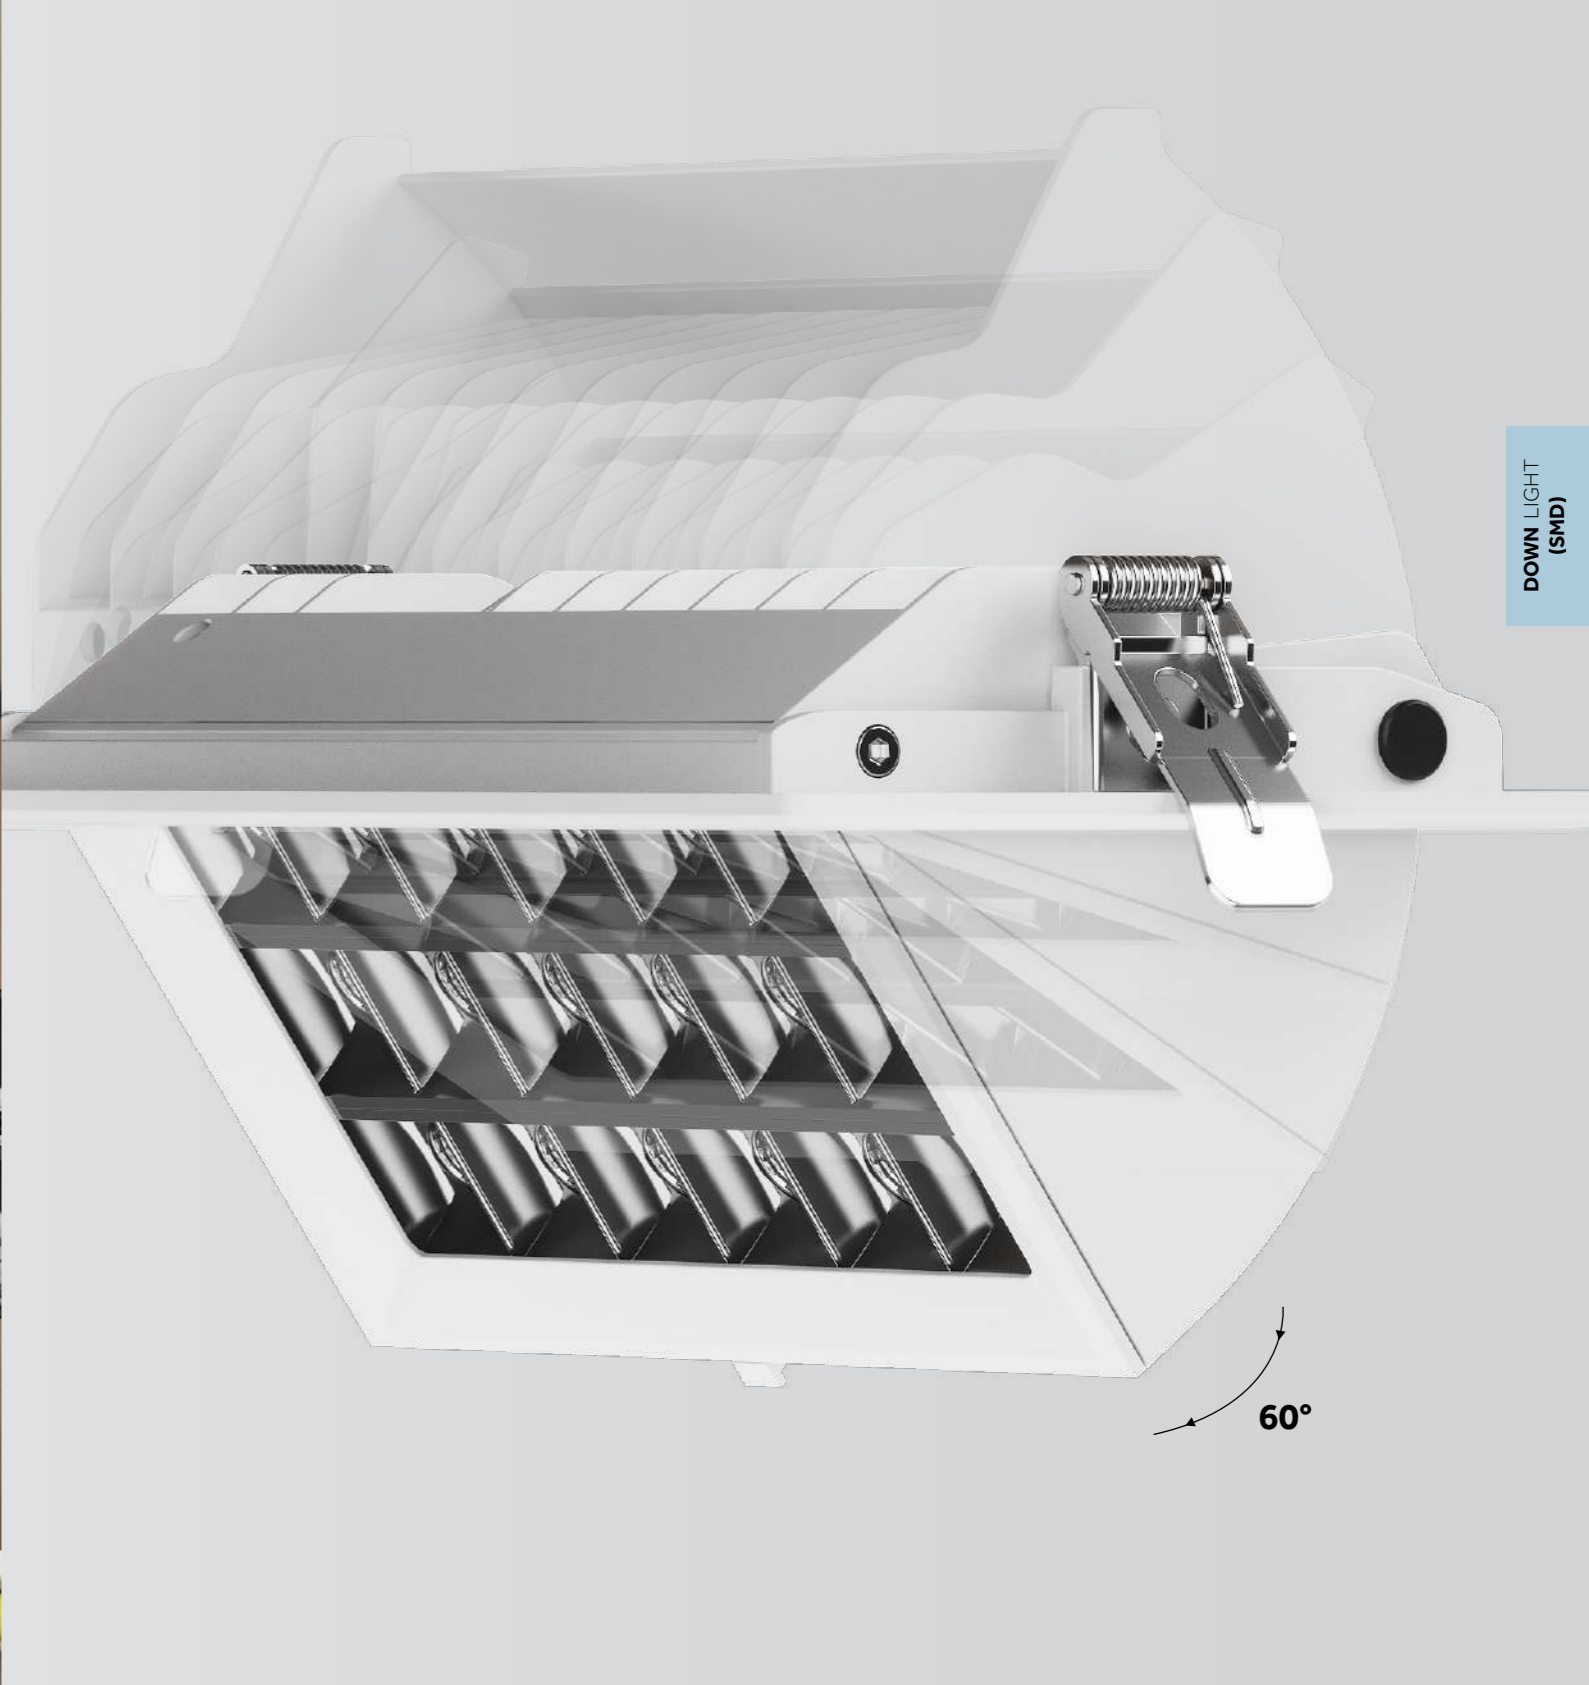

DOWN LIGHT (SMD)

60°


▲ UGR < 19

Excellent optional design ensures maximum visual comfort and glare-free light enjoyment.



LAMPYHOTELOWE.PL

3-CCT / WATT OPTIONAL SWITCH

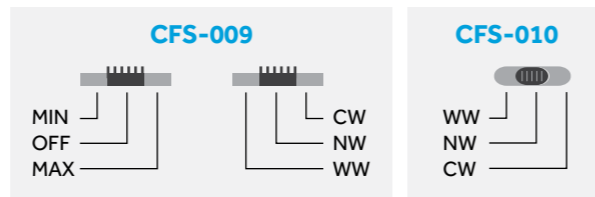

DOWN LIGHT
(SMD)



DOWN LIGHT
(SMD)



RECTANGULAR


With two built-in switch for changing wattage and color temperature, the downlight shows its cost-effective on saving inventory. Different optional optics provide different optical performance.




RECTANGULAR Downlight Series


RECESSED 

DOWN LIGHT (SMD)

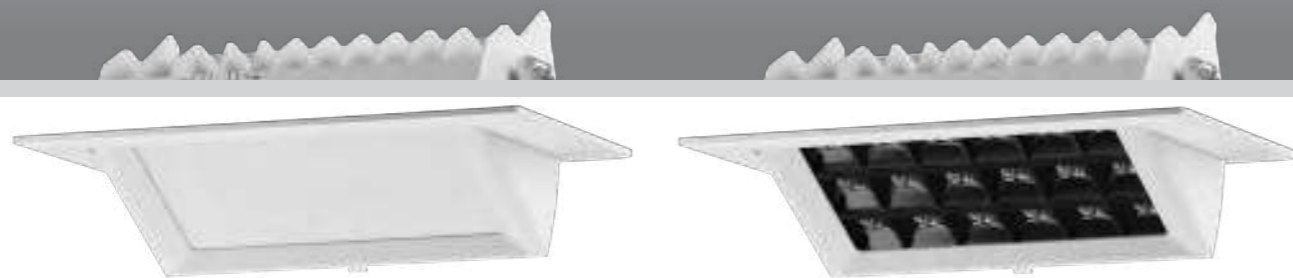

DOWN LIGHT (SMD)

	CFS-009-S		CFS-009-SU
Type	Adjustable 60°		Adjustable 60°
Wattage	20W/28W/38W/48W/60W	20W&28W/28W&38W/38W&48W/48W&60W	20W/30W
Beam Angle	100°		15°/36°/45°
Lumen (lm)	2415/3381/4589/5796/7245	2530/3381/4589/5796	2210/3316
Cut-out (mm) 	215x125		215x125
Size (WxLxHmm)	240x145x96		240x145x96
N.W/PC (kgs)	1.1		1.1
Q'ty/CTN (pcs)	6		6





FINISH: White Silver Black **CCT:** 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

RECTANGULAR Series CFS-009 LED Downlight with high efficiency SMD LED chip, external driver, and changeable lighting orientation with 60° vertical direction. CCT and wattage changeable by slide switch for optional.


Dimension(mm)

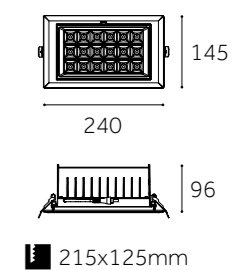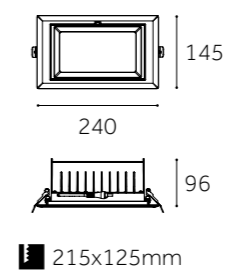

RECTANGULAR Downlight Series


RECESSED 


DOWN LIGHT (SMD)

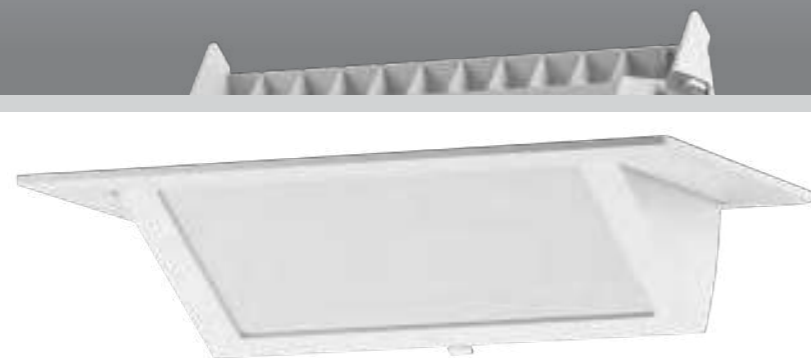

DOWN LIGHT (SMD)

CFS-010-S

Type	Adjustable 60°
Wattage	20W/28W/38W/48W/60W
Beam Angle	100°
Lumen (lm)	2415/3381/4589/5796/7245
Cut-out (mm) 	215x125
Size (WxLxHmm)	240x145x96
N.W/PC (kgs)	1.1
Q'ty/CTN (pcs)	6




FINISH: White Silver Black **CCT:** 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

RECTANGULAR Series CFS-010 LED Downlight with high efficiency SMD LED chip, external driver, and changeable lighting orientation with 60° vertical direction. CCT changeable by slide switch for optional.

Dimension(mm)

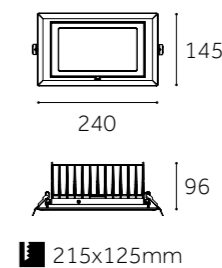



DOWN LIGHT
(SMD)

ROUND

LED Downlight


UGR<19 VISUAL COMFORT



Excellent optical design ensures maximum visual comfort and glare-free light enjoyment.



DOWN LIGHT
(SMD)

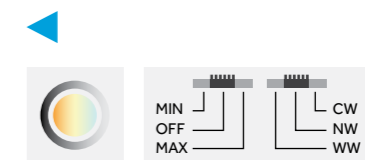

3-CCT&Wattage optional by switch

With two built-in switch for changing wattage and color temperature, the downlight shows its cost-effective on saving inventory.


DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

RS-006-S

Type	Adjustable 50°+350°
Wattage	20W/28W/38W
Beam Angle	90°
Lumen (lm)	2298/3385/4553
Cut-out (mm) ⓘ	Ø165
Size (DxHmm)	Ø195x135
N.W/PC (kgs)	1
Q'ty/CTN (pcs)	12




FINISH: ○ White ● Silver ● Black **CCT:** 3000K — 5700K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting


RS006 Series With two built-in switch for changing wattage and color temperature, the Downlight shows its cost-effective on saving inventory. Die-casting aluminum shell design makes it with an excellent heat dissipation performance.

Dimension(mm)

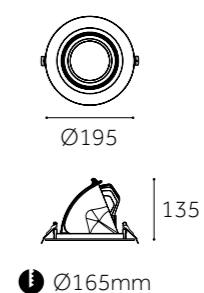



	RS-001-S	RS-003-S
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	20W/28W/38W	20W/28W/38W/50W/60W
Beam Angle	60°	60°
Lumen (lm)	2530/3508/4773	2473/3508/4485/6417/7590
Cut-out (mm) ⓘ	Ø170	Ø215
Size (DxHmm)	Ø195x138	Ø250x144
N.W/PC (kgs)	1.25	2.2
Q'ty/CTN (pcs)	8	6





FINISH: ○ White ● Silver ● Black **CCT:** 3000K 5700K



DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

RS-001 Series The special advantage of round downlight is adjustable lighting direction, which is 60°vertically and 350°rotatable. Die-casting aluminum shell design makes it with an excellent heat dissipation performance.

Dimension(mm)



ⓘ Ø170mm




ⓘ Ø215mm




ROUND Grill Light Series


RECESSED 

DOWN LIGHT (SMD)

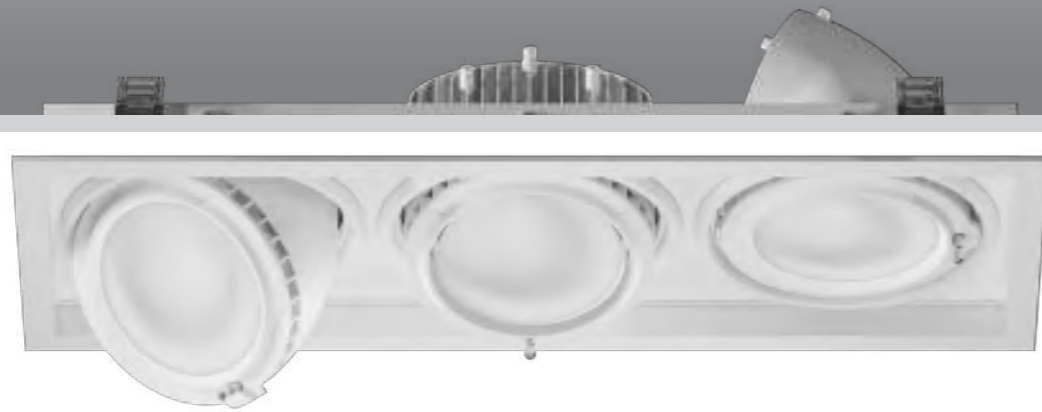

DOWN LIGHT (SMD)

	RS-DD01-S	RS-DD02-S	RS-DD03-S
Type	Adjustable 60°+350°	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	20W/28W/38W	20Wx2/28Wx2/38Wx2	20Wx3/28Wx3/38Wx3
Beam Angle	60°	60°	60°
Lumen (lm)	2530/3542/4807	5060/7015/8740	7590/10523/13653
Cut-out (mm) 	185x185	185x340	185x510
Size (WxLxHmm)	200x200x150	365x200x150	530x200x150
N.W/PC (kgs)	1.5	3.5	4.5
Q'ty/CTN (pcs)	8	4	3




FINISH: White Silver Black **CCT:** 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

RS-001 Series The special advantage of round downlight is adjustable lighting direction, which is 60°vertically and 350°rotatable. Die-casting aluminum shell design makes it with an excellent heat dissipation performance.

Dimension(mm)

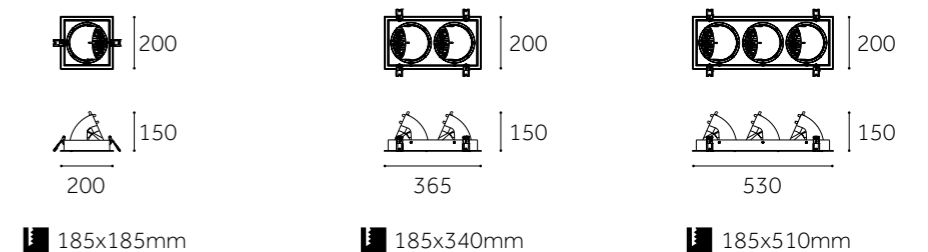


LAMPYHOTELOWE.PL



DOWN LIGHT (SMD)

CRESCENT


LED Downlight

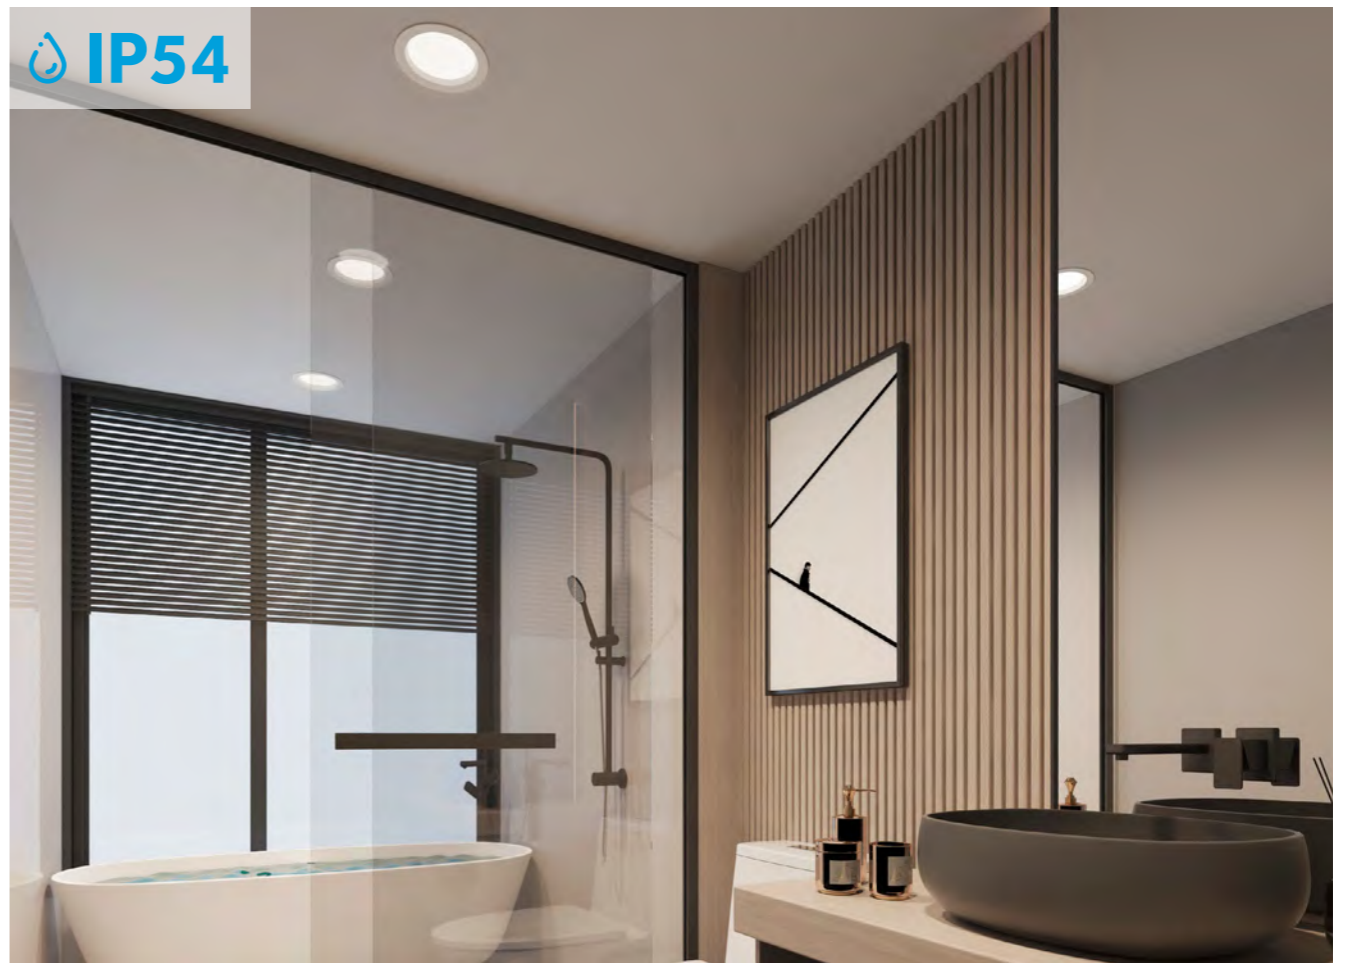

IP54

DOWN LIGHT (SMD)

Appearance:
 High precision die-casting aluminum intergrated radiator with excellent thermal conductivity. PMMA cover material is adopted. The area of the beam is larger and brighter.

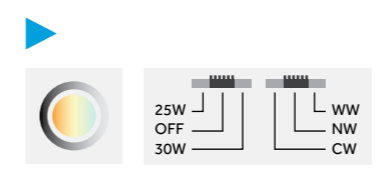

3-CCT&Wattage optional by switch
 (For smd):

With two built-in switch for changing wattage and color temperature, the downlight shows its cost-effective on saving inventory.




DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

Type	XY-DL06-S		XY-DL08-S		XY-DL09-S	
	Fixed		Fixed		Fixed	
Wattage	30W	25W&30W	40W	40W&48W	60W	50W&60W
Beam Angle	100°		100°		100°	
Lumen (lm)	3893	3966	5036	6622	6042	6875
Cut-out (mm) ⓘ	Ø165-185		Ø200-220		Ø235-260	
Size (DxHmm)	Ø195x50		Ø230x50		Ø270x50	
N.W/PC (kgs)	0.67		0.94		1.16	
Q'ty/CTN (pcs)	18		12		10	




FINISH: White Black

CCT: 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

CRESCENT Series LED SMD Downlight with high efficiency LED SMD Epistar chip, external driver. 1-CCT and 3-CCT optional(3000K&4000K&5700K). Wattage changeable by switch.


Dimension(mm)



Ø195




ⓘ Ø165-185mm



Ø230



ⓘ Ø200-220mm



Ø270



ⓘ Ø235-260mm




DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

	XF-DL03CD-S	XF-DL04CD-S	XF-DL05CD-S	XF-DL06CD-S	XF-DL08CD-S	XF-DL09CD-S
Type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	15W	20W	30W	40W	48W
Beam Angle	100°	100°	100°	100°	100°	100°
Lumen (lm)	1380	2070	2760	3795	5520	6624
Cut-out (mm) ⓘ	Ø75-95	Ø120-135	Ø140-155	Ø165-185	Ø205-220	Ø230-255
Size (DxHmm)	Ø110x25	Ø145x25	Ø165x25	Ø195x39	Ø230x39	Ø265x39
N.W/PC (kgs)	0.22	0.32	0.36	0.57	0.8	1.03
Q'ty/CTN (pcs)	48	36	28	12	24	20




FINISH: White Black

CCT: 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

XF Series with SMD high efficiency LED chip, external driver. Luminarie color can be black and white for optional. 6 sizes: 3/4/5/6/8/9 inch for optional. Ultra-thin design is suitable for very low ceilings.

Dimension(mm)

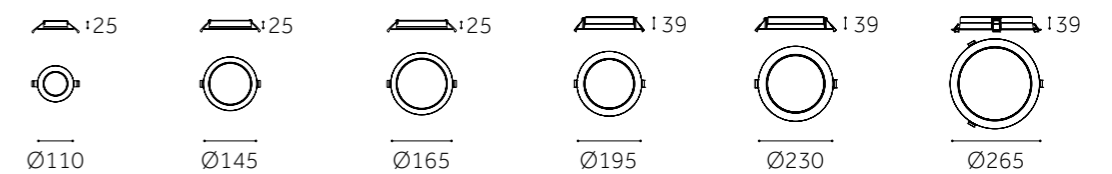


ⓘ Ø75-95mm ⓘ Ø120-135mm ⓘ Ø140-155mm ⓘ Ø165-185mm ⓘ Ø205-220mm ⓘ Ø230-255mm




DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

	XF-DD1818CD-S	XF-DD3218M-S	XF-DD4718CD-S
Type	Fixed	Fixed	Fixed
Wattage	10W	10Wx2	10Wx3
Beam Angle	100°	100°	100°
Lumen (lm)	1380	2760	4140
Cut-out (mm) 	160x160	305x160	455x160
Size (WxLxHmm)	180x180x33	360x180x33	470x180x33
N.W/PC (kgs)	0.7	1.2	1.75
Q'ty/CTN (pcs)	20	10	6





FINISH: White Black

CCT: 3000K 5700K



DIMMING: Triac 1-10V DALI Smart lighting

XF Series with SMD high efficiency LED chip, external driver. Luminaire color can be black and white for optional. One head, two heads, three heads for optional. Ultra-thin design is suitable for very low ceilings.


Dimension(mm)




 160x160mm



 305x160mm

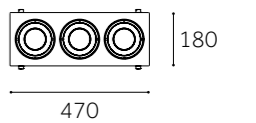


 455x160mm



DOB

LED Downlight

DOWN LIGHT
(SMD)

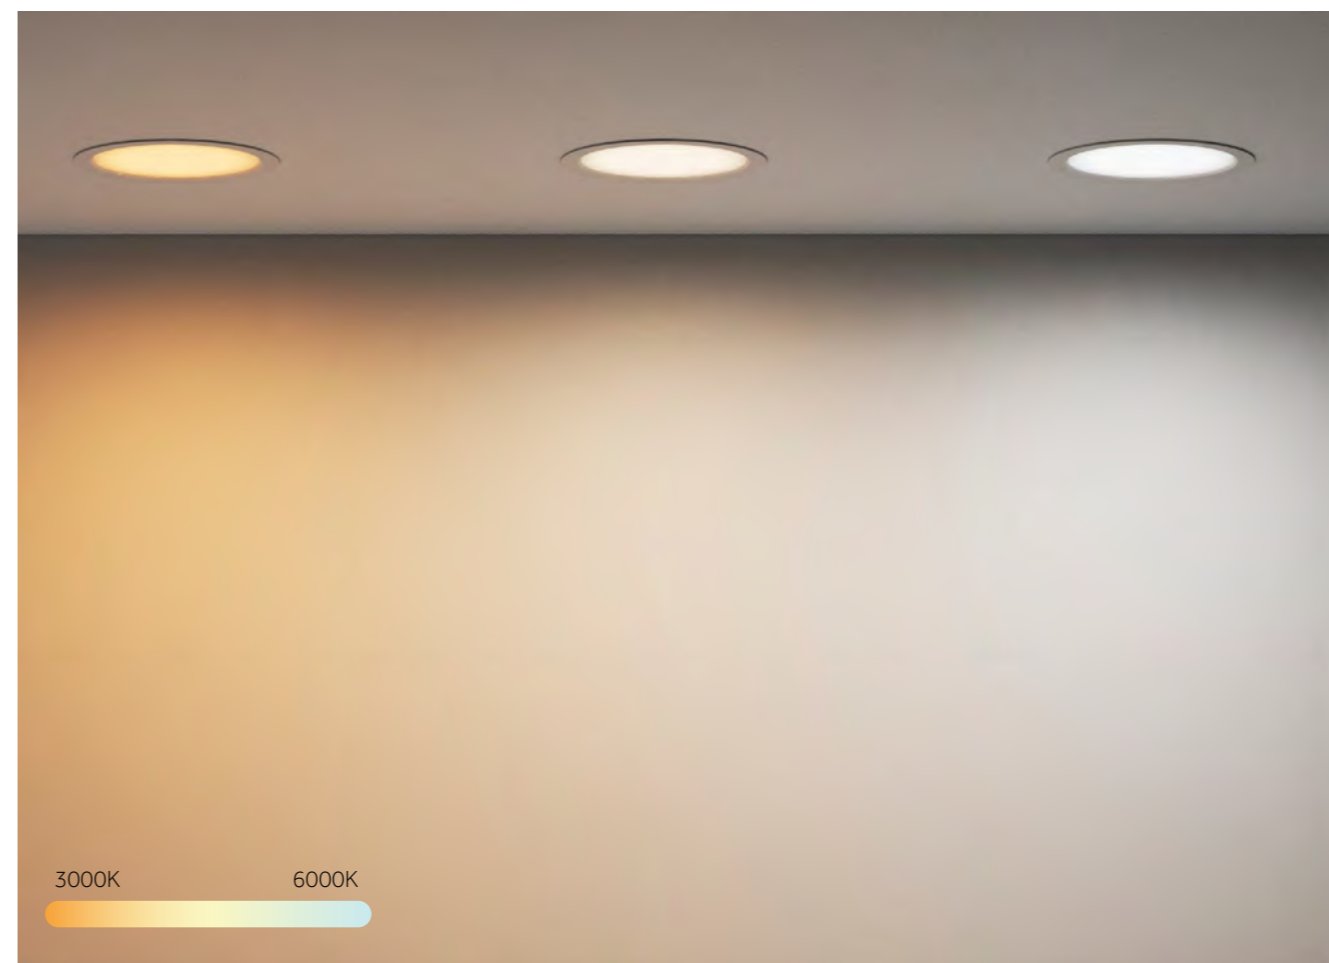

DOWN LIGHT
(SMD)

CRI>80
HIGH
BRIGHT




No flicker



High transmittance

Backlit design, not yellowing:

Compare with traditional side panel light, DOB panel light adopt the backlit design makes the diffuser plate is not yellowing.

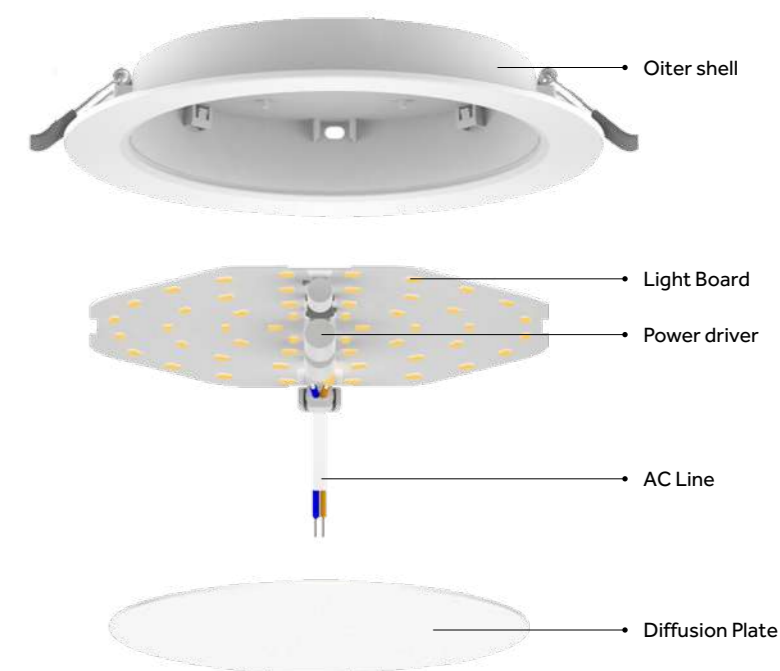




DOWN LIGHT (SMD)

DOWN LIGHT (SMD)

	DOB-DL100R-S	DOB-DL120R-S	DOB-DL145R-S	DOB-DL175R-S	DOB-DL225R-S	DOB-DL300R-S
Type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	4W	6W	9W	15W	20W	24W
Beam Angle	120°	120°	120°	120°	120°	120°
Lumen (lm)	276	449	725	1294	1955	2208
Cut-out (mm) ⓘ	Ø77-82	Ø95-100	Ø110-120	Ø140-150	Ø190-200	Ø265-275
Size (DxHmm)	Ø98x25.5	Ø118x25.5	Ø145x25.5	Ø175x26.5	Ø222x27.5	Ø295x30
N.W/PC (kgs)	0.0473	0.065	0.091	0.137	0.199	0.342
Q'ty/CTN (pcs)	90	90	60	30	30	20




FINISH: White Black

CCT: 3000K 6000K

DIMMING: Triac


DOB Series Compare with traditional side panel light, DOB panel light adopt the backlit design makes the diffuser plate is not yellowing. DOB solution & full plastic material comply with safety standards, withstand voltage 2000V+4U. Ultra-thin light body is suitable for a variety of ceilings, easy to install.


Dimension(mm)

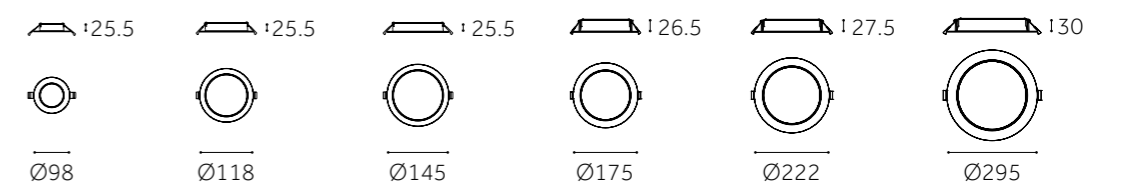

ⓘ Ø77-82mm ⓘ Ø95-100mm ⓘ Ø110-120mm ⓘ Ø140-150mm ⓘ Ø190-200mm ⓘ Ø265-275mm




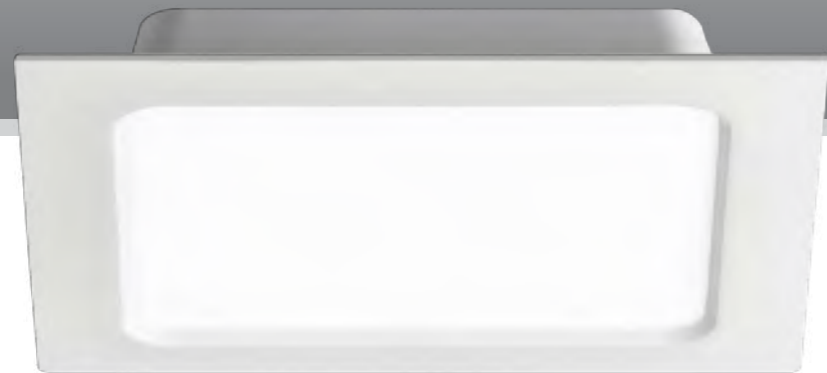

	DOB-DL120S-S	DOB-DL145S-S	DOB-DL175S-S	DOB-DL225S-S	DOB-DL300S-S
Type	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	6W	9W	15W	20W	24W
Beam Angle	120°	120°	120°	120°	120°
Lumen (lm)	483	776	1380	2070	2208
Cut-out (mm) 	95x95-100x100	110x110-120x120	140x140-150x150	190x190-200x200	265x265-275x275
Size (WxLxHmm)	120x120x26.5	145x145x26.5	175x175x26.5	224x224x27.5	295x295x30
N.W/PC (kgs)	0.077	0.099	0.148	0.234	0.438
Q'ty/CTN (pcs)	90	60	30	30	20

DOWN LIGHT (SMD)

DOWN LIGHT (SMD)




FINISH: White Black

CCT: 3000K 6000K

DIMMING: Triac

DOB Series Compare with traditional side panel light, DOB panel light adopt the backlit design makes the diffuser plate is not yellowing. The high CRI is greater than 80 makes everything close to real. It is very easy to assemble by the simple structure which the Led chip and driver integrated design. Moreover, there are round and square frames for optional.

Dimension(mm)

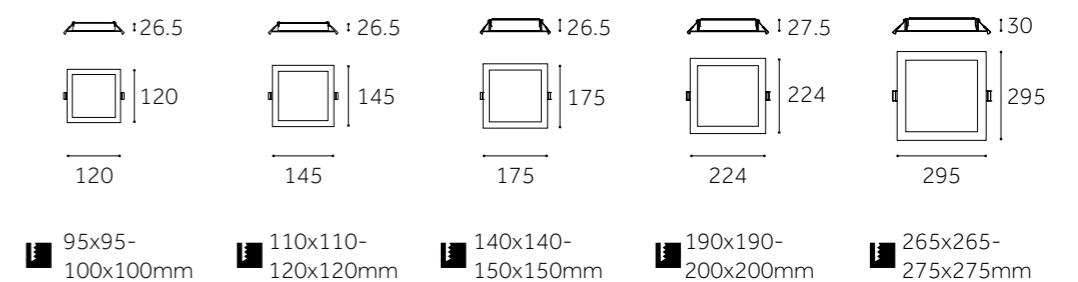


DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

	YS-DL03M-S	YS-DL04M-S	YS-DL05M-S
Type	Fixed	Fixed	Fixed
Wattage	6W/9W	6W/9W/12W/15W	12W/15W/20W/24W
Beam Angle	100°	100°	100°
Lumen (lm)	717/1058	717/1058/1518/1898	1518/1840/2473/2875
Cut-out (mm) ⓘ	Ø90	Ø125	Ø145
Size (DxHmm)	Ø110x55	Ø155x54	Ø175x54
N.W/PC (kgs)	0.33	0.5	0.63
Q'ty/CTN (pcs)	36	24	24




FINISH: White frame + Black heat sink **CCT:** 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

AEROLITE Series New structure with compact and portable design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose, also have tri-cct version for your option, to help you save inventory.

Dimension(mm)

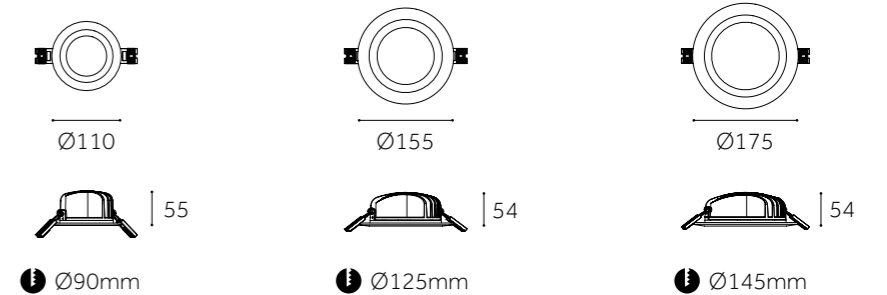


DOWN LIGHT (SMD)

DOWN LIGHT (SMD)



	YS-DL06M-S	YS-DL08M-S
Type	Fixed	Fixed
Wattage	12W/15W/20W/24W/30W/36W	20W/24W/30W/36W/42W/48W
Beam Angle	100°	100°
Lumen (lm)	1518/1840/2473/2875/3600/4313	2492/2852/3508/4485/4658/5624
Cut-out (mm) ⓘ	Ø165	Ø210
Size (DxHmm)	Ø195x56	Ø245x54
N.W/PC (kgs)	0.75	1.2
Q'ty/CTN (pcs)	16	12




FINISH: White frame + Black heat sink **CCT:** 3000K — 5700K

DIMMING: Triac 1-10V DALI Smart lighting

AEROLITE Series New structure with compact and portable design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose, also have tri-cct version for your option, to help you save inventory.

Dimension(mm)




Ø195



56

ⓘ Ø165mm



Ø245



54

ⓘ Ø210mm




DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

	YS-DL06M-SF	YS-DL08M-SF
Type	Fixed	Fixed
Wattage	12W/15W/20W/24W/30W/36W	20W/24W/30W/36W/42W/48W
Beam Angle	100°	100°
Lumen (lm)	1484/1840/2473/2864/3830/4462	2496/2864/3508/4451/4658/5624
Cut-out (mm) ⓘ	Ø165	Ø210
Size (WxLxHmm)	180x180x63	235x235x59
N.W/PC (kgs)	0.85	1.2
Q'ty/CTN (pcs)	16	12




FINISH: White frame + Black heat sink **CCT:** 3000K — 5700K


DIMMING: Triac 1-10V DALI Smart lighting

AEROLITE Series New structure with compact and portable design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose, also have tri-cct version for your option, to help you save inventory.

Dimension(mm)



ⓘ Ø165mm




ⓘ Ø210mm





	LDI-06-S	LDI-08-S
Type	Fixed	Fixed
Wattage	12W/15W/20W/30W	12W/15W/20W/25W/30W/38W
Beam Angle	100°	100°
Lumen (lm)	1553/1817/2530/3853	1553/1944/2530/3162/3968/4658
Cut-out (mm) ⓘ	Ø185	Ø215
Size (DxHmm)	Ø210x78	Ø251x80
N.W/PC (kgs)	0.9	1.1
Q'ty/CTN (pcs)	8	12




FINISH: White Silver Black **CCT:** 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

LDI Series Optimized light distribution design solution can make the optical property more excellent 6 and 8 inch for your option, also can do tri-cct, to help you save inventory.

Dimension(mm)

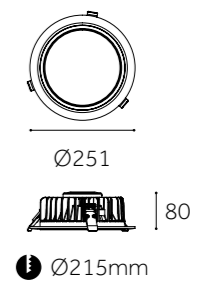




JL-CE04GM-S	
Type	Fixed
Wattage	9W/12W/14W/21W
Beam Angle	90°
Lumen (lm)	978/1288/1553/2243
Cut-out (mm) ⓘ	Ø110
Size (DxHmm)	Ø120x88
N.W/PC (kgs)	0.53
Q'ty/CTN (pcs)	18

DOWN LIGHT (SMD)

DOWN LIGHT (SMD)




FINISH: White Silver Black **CCT:** 3000K 5700K

DIMMING: Triac 1-10V DALI Smart lighting

GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminarie color can be black, white and silver for optional. Durable die-casting aluminum body with heat sink. High efficiency and brand COB LED chip. Multi-reflector system for optional beam angle.

Dimension(mm)

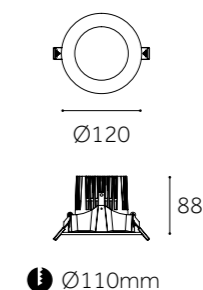


DOWN LIGHT (SMD)



DOWN LIGHT (SMD)

	NS-DL05M-S	NS-DD3216M-S
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	10W/15W/20W/25W	10Wx2/15Wx2/20Wx2/25Wx2
Beam Angle	95°	95°
Lumen (lm)	1145/1760/2399/2990	2335/3632/4922/6030
Cut-out (mm) ⓘ	Ø122	290x140
Size (DxHmm)	Ø130x162.5	320x160x162.5
N.W/PC (kgs)	1.16	2.97
Q'ty/CTN (pcs)	12	4



FINISH: ○ White ● Silver ● Black

CCT: 3000K 5700K

DIMMING: ✓ Non-Dimmable

ARTEMIS Series products design with various installation options of surface-mounted, recessed, track and pendant. It provides excellent lighting effect for commercial space such as supermarkets and shops. 350 degree rotatable, 60 degree adjustable, the lamp head can be stretched to meet the adjustment of the different area. Button locked the angle, safe and convenient. 15°,25°,40° beam angle for COB version, 95° beam angle for SMD version.

Dimension(mm)




Ø130




162.5

ⓘ Ø122mm



320

160



162.5





ⓘ 290x140mm




LED DOWN LIGHT (COB)

DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

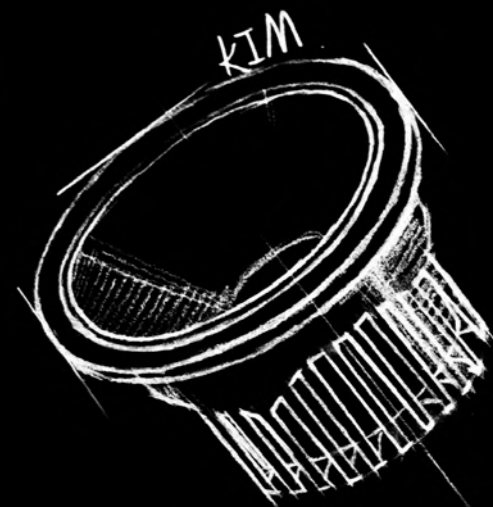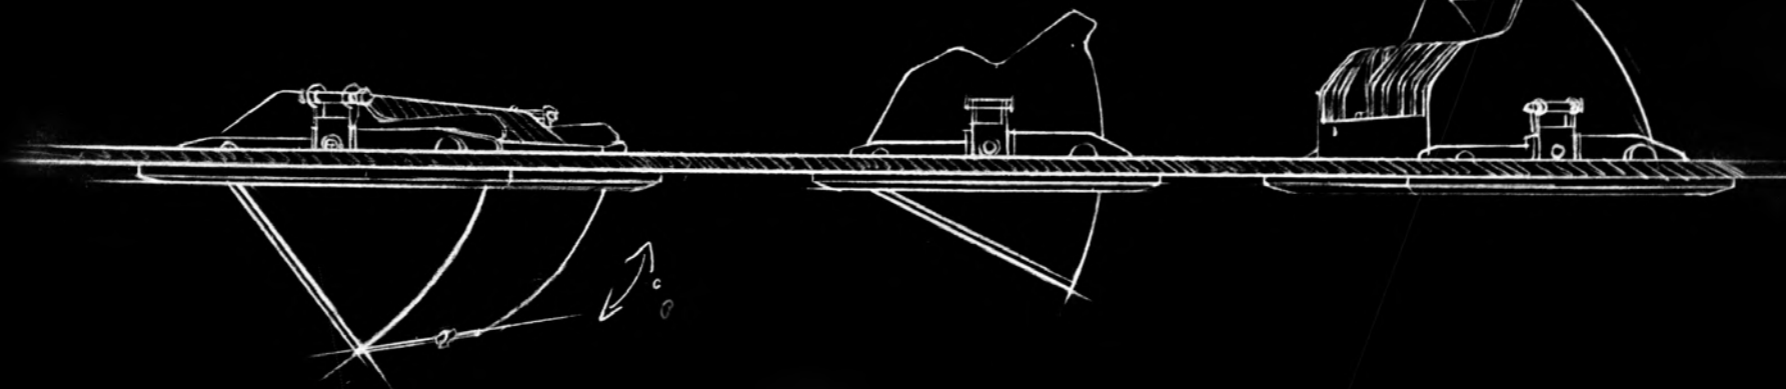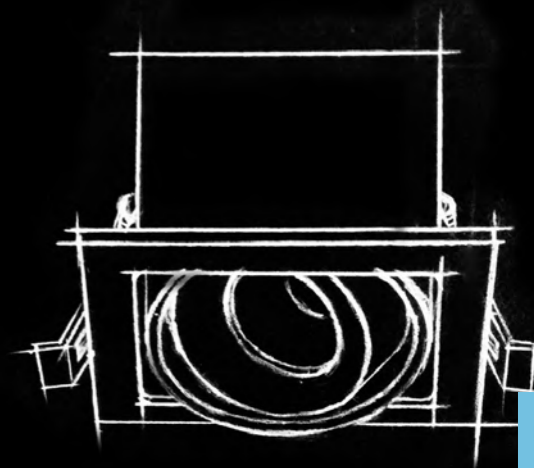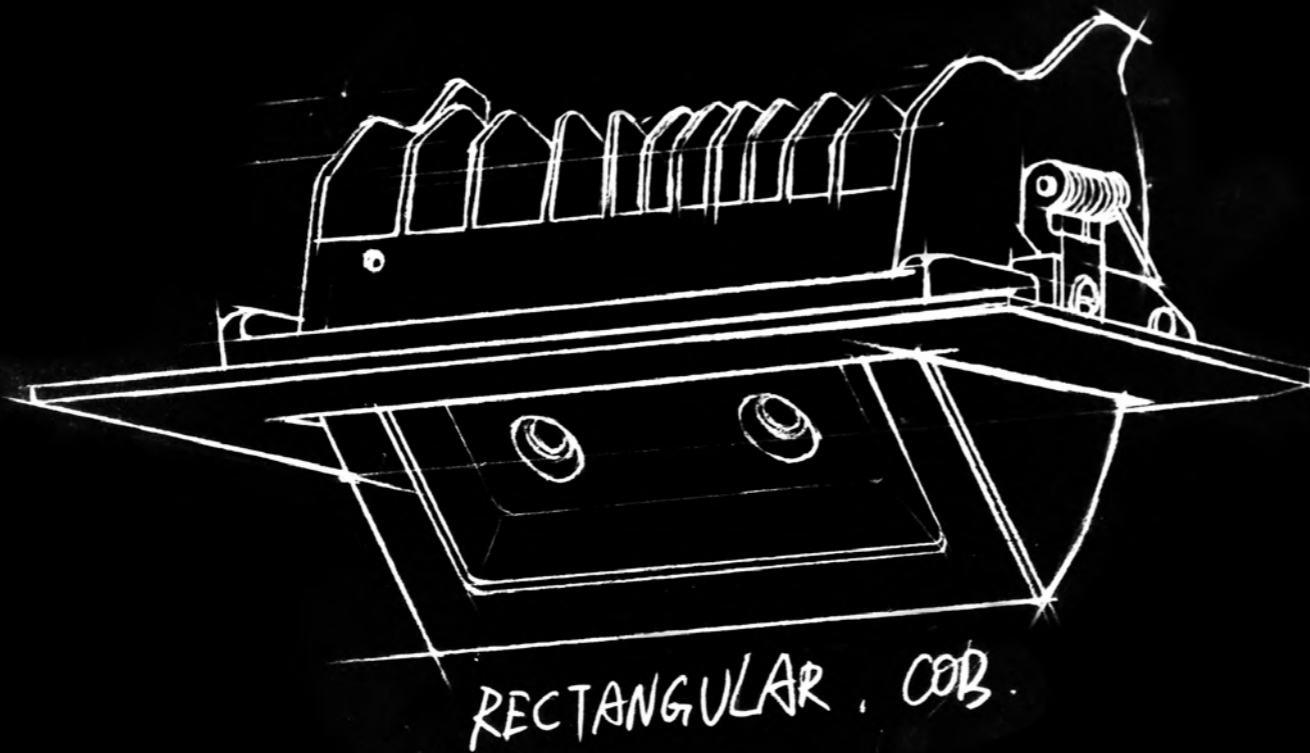

LED Downlight has high transmittance of light, which plays a important role in main lighting. With solutions of SMD and COB, LED Downlight can meet your different lighting demands in different scenes, offering differernt beam angle, lumen output then give you the lighting effect you want.

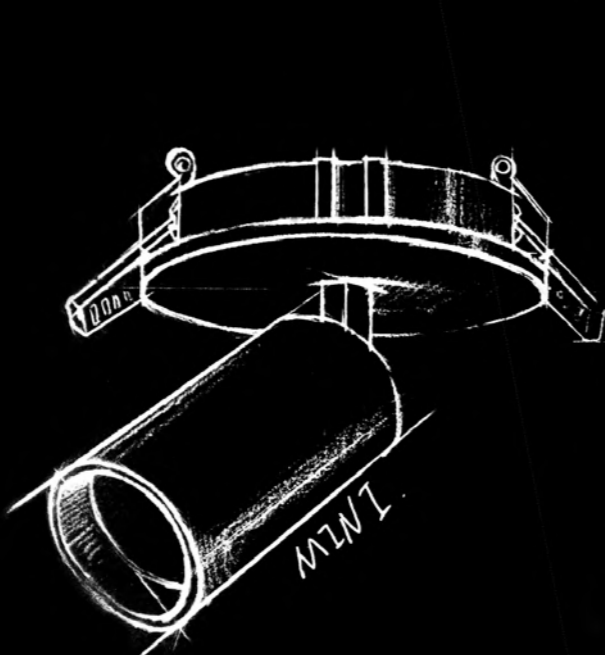


- White
- Gold
- Silver mist
- Rose gold
- Bright silver
- Matte black
- Gun color

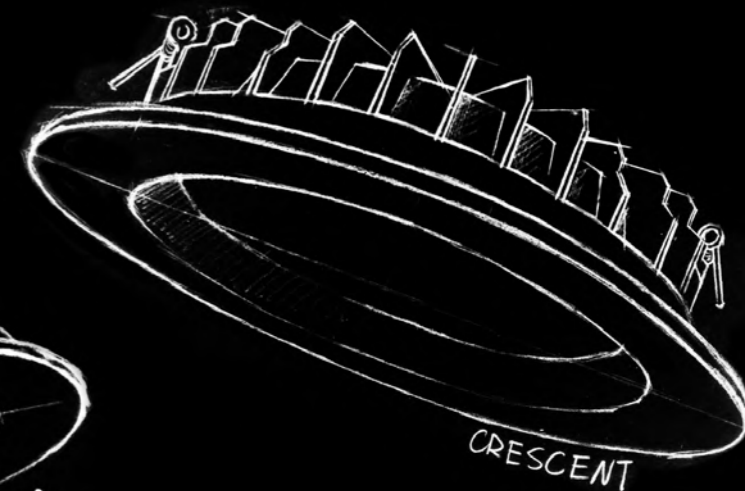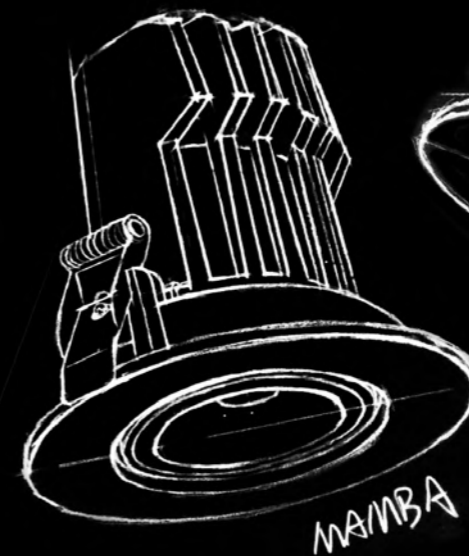


LAMPYHOTELOWE.PL

RECTANGULAR Downlight Series


RECESSED 

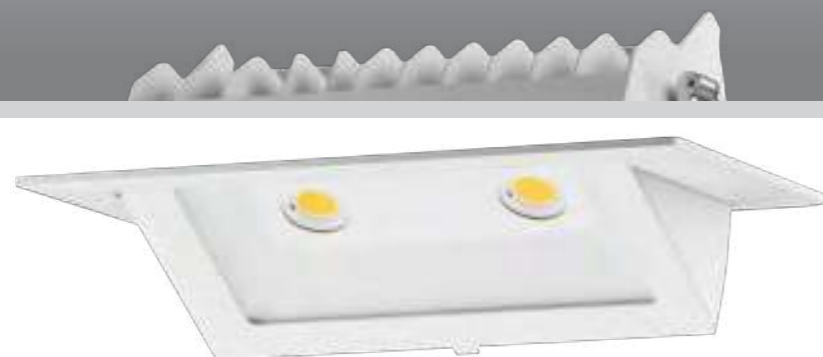

CFS-009-C	
Type	Adjustable 55°+350°
Wattage	20W/28W/38W/48W
Beam Angle	100°
Lumen (lm)	2300/3220/4370/5520
Cut-out (mm) 	215x125
Size (WxLxHmm)	240x145x96
N.W/PC (kgs)	1.1
Q'ty/CTN (pcs)	6

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

RECTANGULAR Series CFS-009 LED Downlight with high efficiency COB LED chip, external driver. Adjust 55° and rotate 350°. CCT changeable by slide switch for optional.

Dimension(mm)

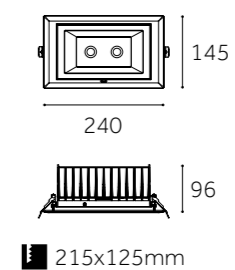




	RS-006-C	RS-006-C&D
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	20W/28W/38W	20W/28W/38W
Beam Angle	90°	15°/24°/36°/60°
Lumen (lm)	2400/3360/4560	2400/3360/4560
Cut-out (mm) ⓘ	Ø165	Ø165
Size (DxHmm)	Ø195x135	Ø195x135
N.W/PC (kgs)	1	1
Q'ty/CTN (pcs)	12	12

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)






FINISH: ○ White ● Silver ● Black **CCT:** 3000K ————— 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

RS006 Series With built-in switch for color temperature, the Downlight shows its cost-effective on saving inventory. Die-casting aluminum shell design makes it with an excellent heat dissipation performance. The high efficiency of this Downlight can reach 120lm/w and CRI is greater than 80 for making everything look more real.

Dimension(mm)

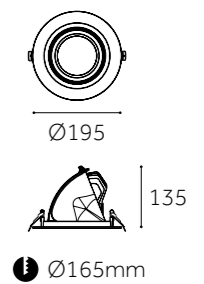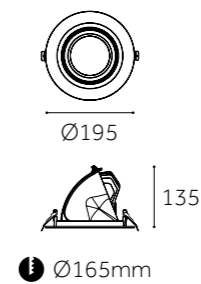


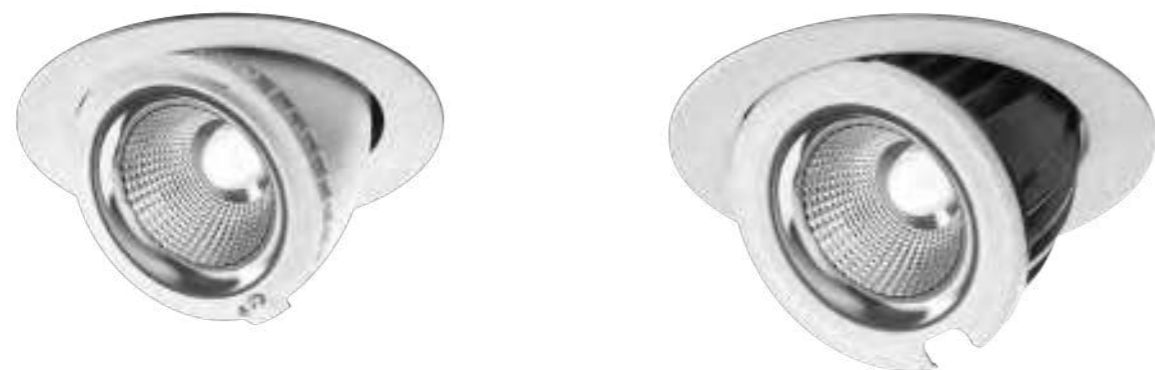

	RS-001-C&D	RS-003-C&D
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	20W/28W/38W	20W/28W/38W/50W
Beam Angle	16°/24°/38°	16°/24°/38°
Lumen (lm)	2400/3360/4560	2400/3360/4560/6000
Cut-out (mm) ⓘ	Ø170	Ø215
Size (DxHmm)	Ø195x138	Ø250x144
N.W/PC (kgs)	1.25	2.2
Q'ty/CTN (pcs)	8	6

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)



FINISH: ○ White ● Silver ● Black **CCT:** 3000K 6000K


DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

RS-003 Series The special advantage of round adjustable Downlight is its adjustable lighting direction, which is 60°vertically and 350°rotatable. Die-casting aluminum shell design makes it with an excellent heat dissipation performance. The high efficiency of this Downlight can reach 120lm/w and CRI is greater than 80 for making everything look more real.

Dimension(mm)




Ø195



138

ⓘ Ø170mm




Ø250



144

ⓘ Ø215mm




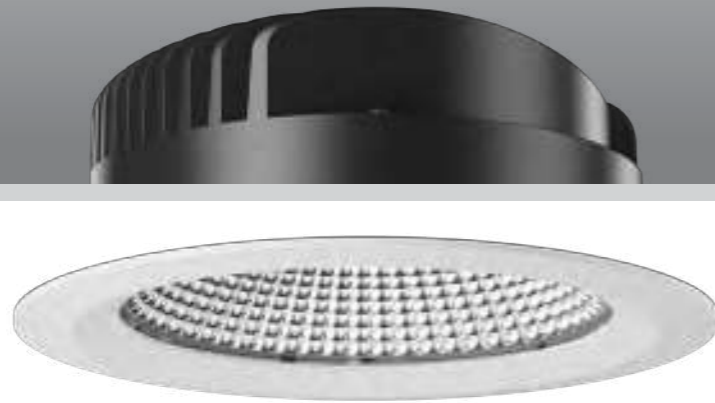

	YS-DL03M-C	YS-DL04M-C	YS-DL05M-C
Type	Fixed	Fixed	Fixed
Wattage	6W/9W	6W/9W/12W/15W	12W/15W/20W/24W
Beam Angle	35°/60°	35°/60°	35°/60°
Lumen (lm)	646/990	646/995/1320/1650	1322/1658/2219/2650
Cut-out (mm) ⓘ	Ø90	Ø125	Ø145
Size (DxHmm)	Ø110x75	Ø155x85	Ø175x85
N.W/PC (kgs)	0.49	0.71	0.82
Q'ty/CTN (pcs)	27	16	16

DOWN LIGHT (COB)

DOWN LIGHT (COB)





FINISH: White frame + Black heat sink **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

AEROLITE Series New structure with compact and portable design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose.

Dimension(mm)

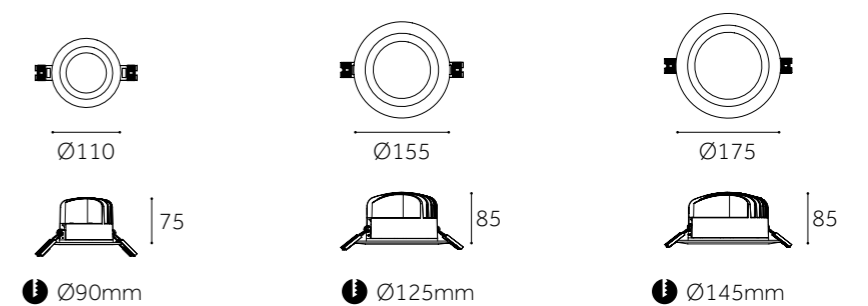


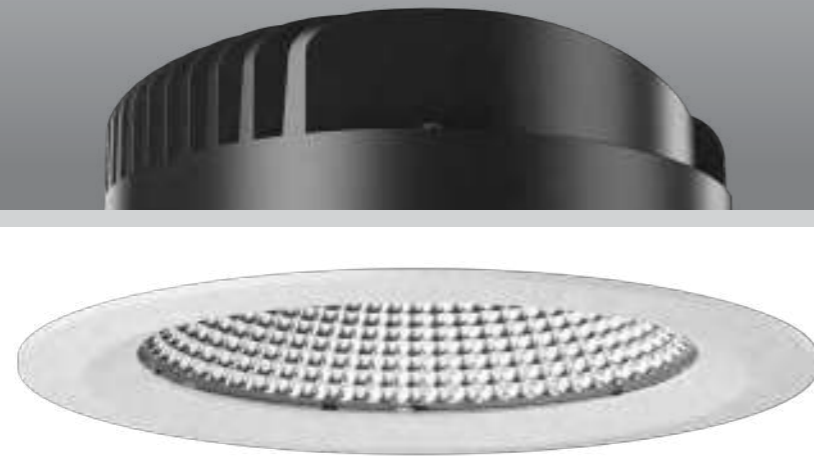

	YS-DL06M-C	YS-DL08M-C
Type	Fixed	Fixed
Wattage	12W/15W/20W/24W/30W/36W	20W/24W/30W/36W/42W/48W
Beam Angle	35°/60°	35°/60°
Lumen (lm)	1357/1650/2250/2640/3320/3980	2250/2640/3320/3980/4620/5280
Cut-out (mm) ⓘ	Ø165	Ø210
Size (DxHmm)	Ø195x86	Ø245x100
N.W/PC (kgs)	1.2	1.78
Q'ty/CTN (pcs)	12	6

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White frame + Black heat sink **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

AEROLITE Series New structure with compact and portable design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose.


Dimension(mm)



Ø195



ⓘ Ø165mm




Ø245



ⓘ Ø210mm




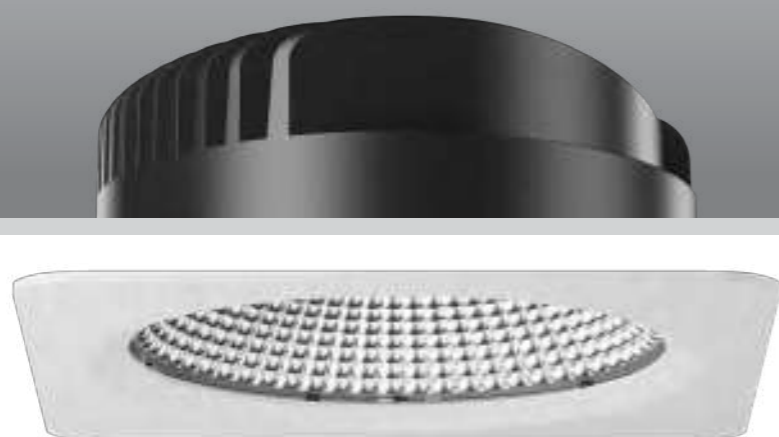

	YS-DL06M-CF	YS-DL08M-CF
Type	Fixed	Fixed
Wattage	12W/15W/20W/24W/30W/36W	20W/24W/30W/36W/42W/48W
Beam Angle	35°/60°	35°/60°
Lumen (lm)	1357/1650/2250/2640/3320/3980	2250/2640/3320/3980/4620/5280
Cut-out (mm) ⓘ	Ø165	Ø210
Size (WxLxHmm)	180x180x87	235x235x100
N.W/PC (kgs)	1.21	1.78
Q'ty/CTN (pcs)	12	6

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)







FINISH: White frame + Black heat sink **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

AEROLITE Series New structure with compact and portable design, Varisized hole size for your option, it can fully meet different requirements. Round frame and square frame for your choose.

Dimension(mm)



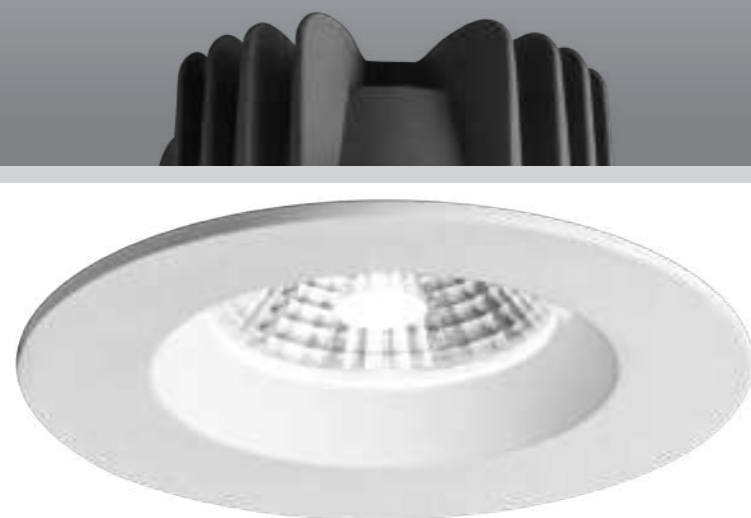


OBS-01005

Type	Fixed			
Wattage	7W	10W	15W	30W
Beam Angle	33.3°	90.6°	99.1°	126.1°
Lumen (lm)	552	920	1725	2933
Cut-out (mm) ⓘ	Ø70	Ø90	Ø150	Ø205
Size (DxHmm)	Ø90x41	Ø120x50	Ø170x50	Ø225x52
N.W/PC (kgs)	0.12	0.22	0.45	0.73
Q'ty/CTN (pcs)	50	50	20	20

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Silver Black


CCT: 3000K 6000K

DIMMING: Non-Dimmable

STAR Series with COB luminus LED chip, external driver. Luminarie color can be black, white and silver for optional. Four size 7W, 10W, 15W, 30W can be selected.

Dimension(mm)

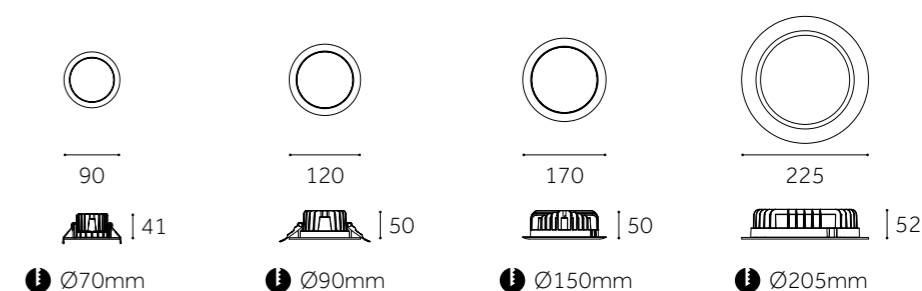


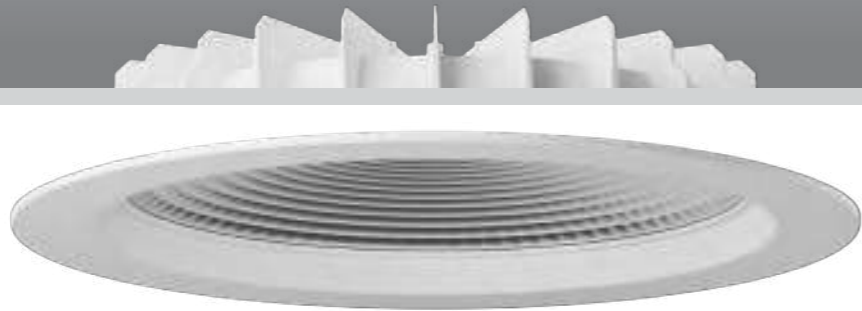

	XY-DL06-C	XY-DL08-C
Type	Fixed	Fixed
Wattage	30W	40W
Beam Angle	90°	90°
Lumen (lm)	3450	4600
Cut-out (mm) ⓘ	Ø165-185	Ø200-220
Size (DxHmm)	Ø195x50	Ø230x50
N.W/PC (kgs)	0.67	0.94
Q'ty/CTN (pcs)	18	12

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Black

CCT: 3000K 6000K


DIMMING: Triac 1-10V DALI Smart lighting

CRESCENT Series LED COB Downlight with high efficiency LED COB chip, external driver. High precision die-cast aluminum integrated radiator and excellent thermal conductivity. 1-CCT and 3-CCT optional(3000K&4000K&5700K).

Dimension(mm)



ⓘ Ø165-185mm



ⓘ Ø200-220mm






DOWN LIGHT
(COB)

MINI

LED Light

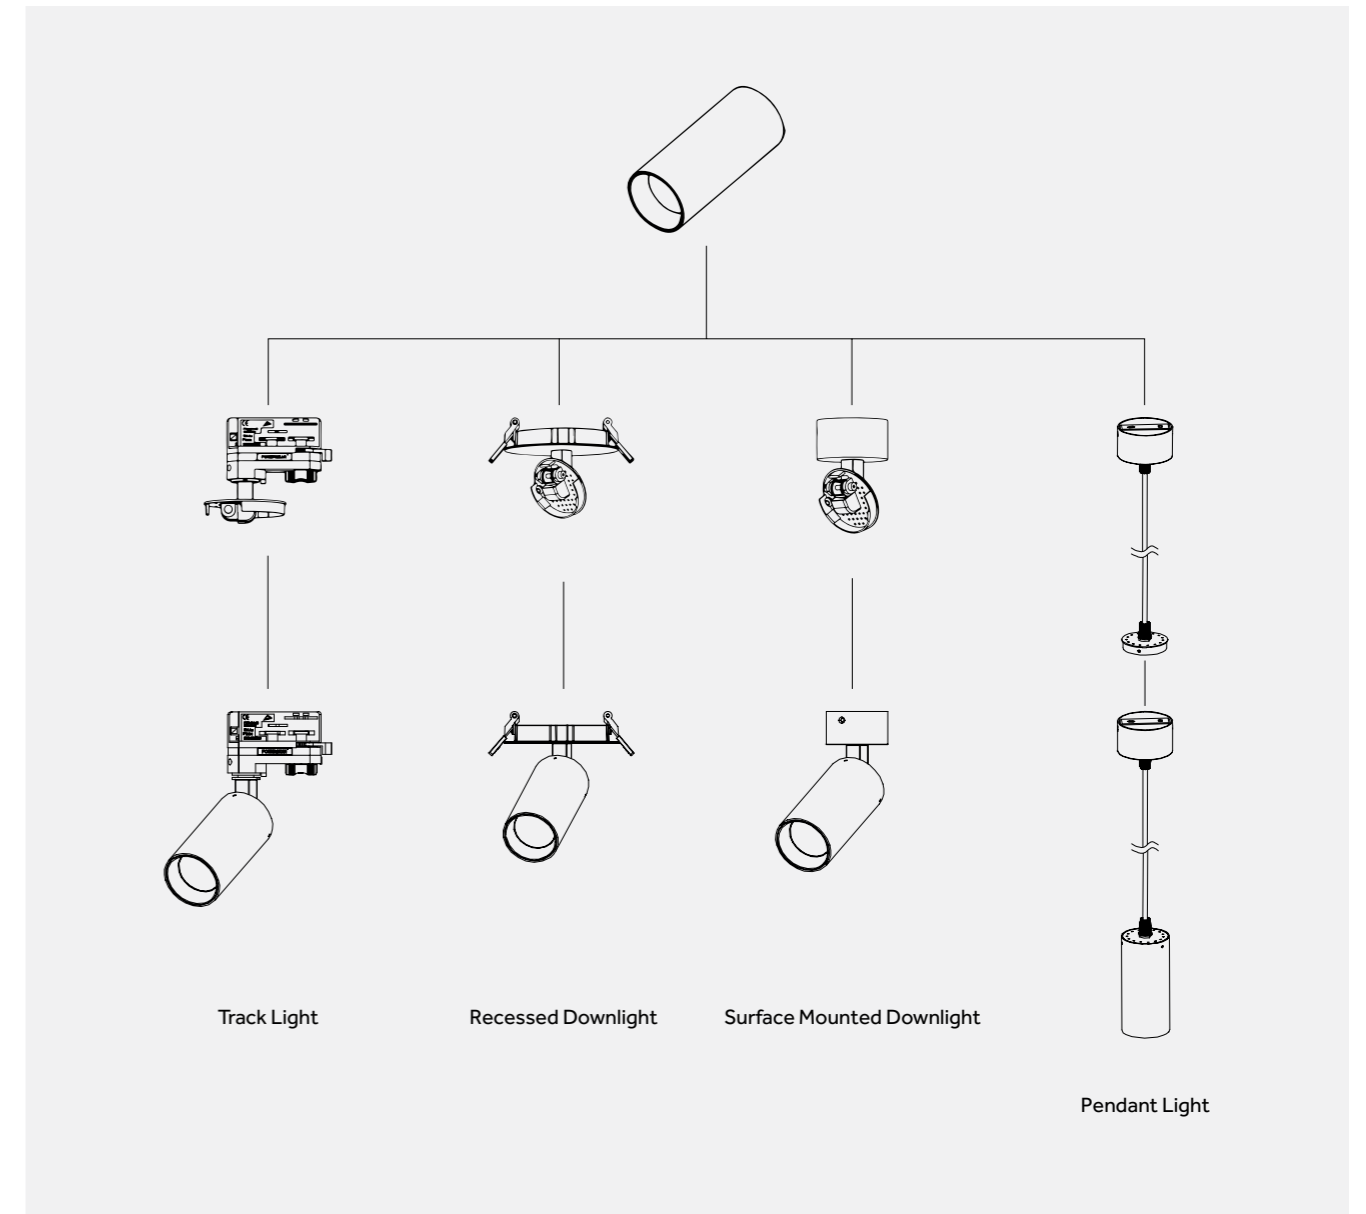

DOWN LIGHT
(COB)

DIY DESIGN

Color diversity: It can adapt to different space decoration style.
Rotation design: It can replacement faster.




DOWN LIGHT (COB)



DOWN LIGHT (COB)

	MN-DL55M-C	MN-DL63M-C	MN-DL75M-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	9W	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°	23°/38°/45°
Lumen (lm)	990	1980	3300
Cut-out (mm) ⓘ	Ø100	Ø100	Ø100
Size (DxLmm)	Ø55x110	Ø63x145	Ø75x165
N.W/PC (kgs)	0.4	0.63	0.84
Q'ty/CTN (pcs)	32	24	20






FINISH: White Silver Black **CCT:** 3000K 6000K

OPTIONAL: White Black Golden Silver

DIMMING: Triac 1-10V DALI Smart lighting

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels, restaurants and other public buildings.

Dimension(mm)

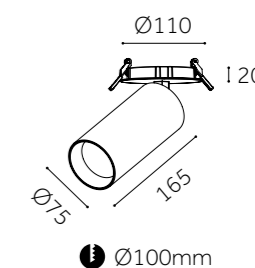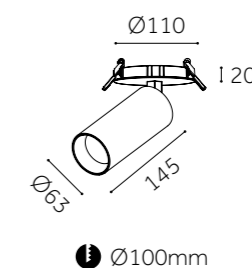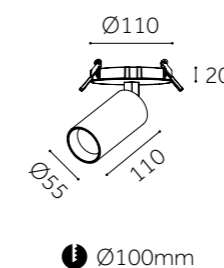




Type

BJ-SP60-C

Type	Adjustable 90°+350°
Wattage	10W/15W/20W
Beam Angle	15°-70°
Lumen (lm)	1039/1725/2536
Cut-out (mm) ⓘ	Ø75
Size (DxHmm)	Ø60x184
N.W/PC (kgs)	0.65
Q'ty/CTN (pcs)	20

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: ○ White ● Silver ● Black

CCT: 3000K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

EAGLE EYE Series with high efficiency brand COB LED chip, build-in driver. Aluminum die-casting body and heat sink which is better air dissipation. Adjustable beam angle from 15°-70°.

Dimension(mm)

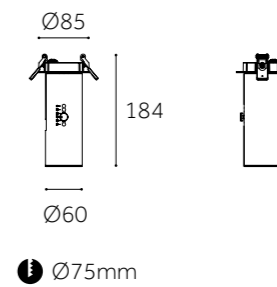




JL-SP04TM-C&D	
Type	Adjustable 90°+350°
Wattage	9W/12W/14W/21W
Beam Angle	16°/24°/50°
Lumen (lm)	1081/1415/1679/2438
Cut-out (mm) ⓘ	Ø125
Size (DxHmm)	Ø130x115
N.W/PC (kgs)	1
Q'ty/CTN (pcs)	12

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminaire color can be black, white and silver for optional. Durable die-casting aluminum body with heat sink. High efficiency and brand COB LED chip. Multi-reflector system for optional beam angle.

Dimension(mm)

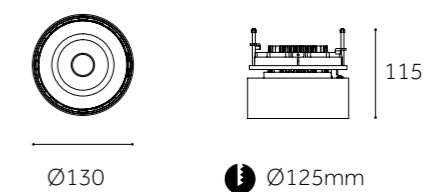


DOWN LIGHT
(COB)



KING KONG


LED Downlight

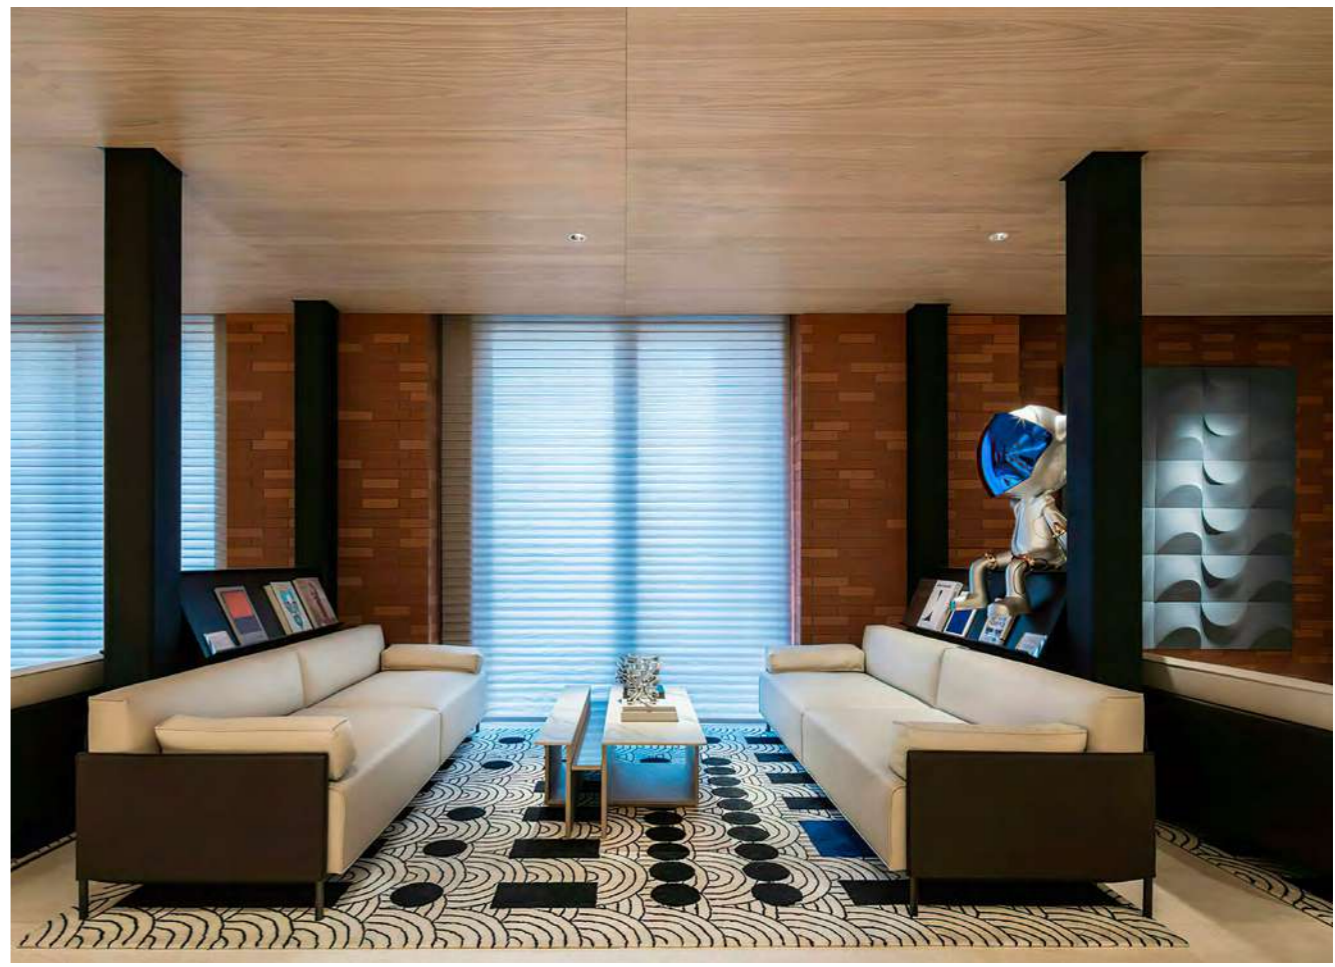


DOWN LIGHT
(COB)


With color of bright white, bright black, gun black, bright silver, matt silver

Reflector

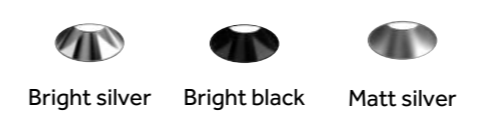

Lens

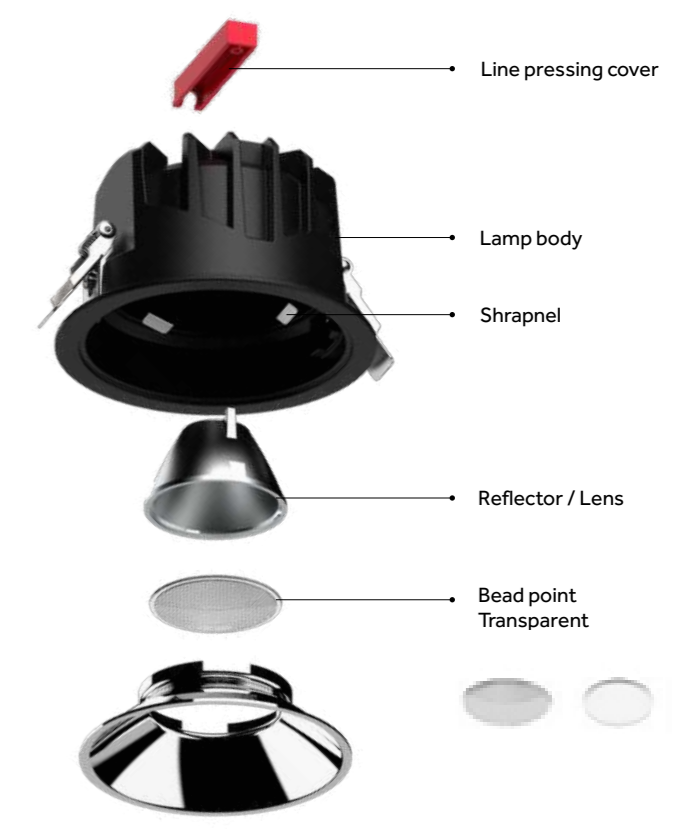


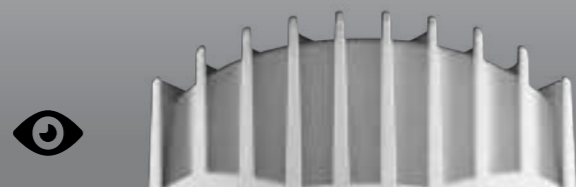

	OBS-JG-DL02M-C	OBS-JG-DL03M-C	OBS-JG-DL04M-C	OBS-JG-DL06M-C	OBS-JG-DL08M-C
Type	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	18W	30W	40W	50W
Beam Angle	24°/55°	24°/55°	24°/55°	15°/24°/38°/55°	15°/24°/38°/55°
Lumen (lm)	1100	1980	3300	4400	5500
Cut-out (mm) ⓘ	Ø75	Ø90	Ø125	Ø165	Ø200
Size (DxHmm)	Ø86x55	Ø101x60	Ø140x73	Ø180x94	Ø214x110
N.W/PC (kgs)	0.24	0.32	0.48	1.11	1.32
Q'ty/CTN (pcs)	50	50	30	18	12

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Black **CCT:** 3000K 6000K


OPTIONAL: Bright white Bright black Gun black Silver Matt silver

DIMMING: No dim Triac 1-10V DALI Smart lighting

KING KONG Series Integrated radiator with good quality, serialized size to meet different floors and scenes. Rigid thermal line design, highlighting the sense of science and technology, so named King Kong. The design of plastic pressure line cover is integrated with different color elements to present a more personalized appearance.

Dimension(mm)

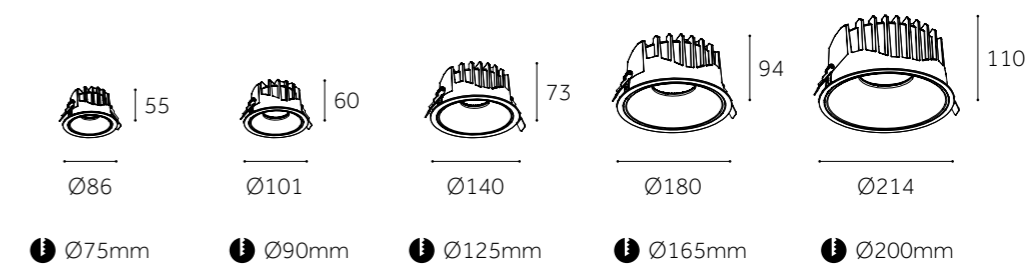


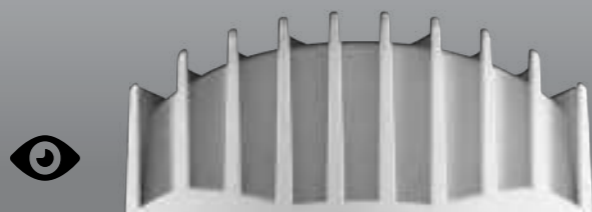

	OBS-JG-DL02M-C&D	OBS-JG-DL03M-C&D	OBS-JG-DL04M-C&D
Type	Fixed	Fixed	Fixed
Wattage	10W	18W	30W
Beam Angle	15°/24°/38°/55°	15°/24°/38°/55°	15°/24°/38°/55°
Lumen (lm)	1100	1980	3300
Cut-out (mm) ⓘ	Ø75	Ø90	Ø125
Size (DxHmm)	Ø86x55	Ø101x60	Ø140x73
N.W/PC (kgs)	0.24	0.32	0.48
Q'ty/CTN (pcs)	50	50	30

DOWN LIGHT (COB)

DOWN LIGHT (COB)



FINISH: White Black **CCT:** 3000K 6000K

OPTIONAL: Bright white Bright black Gun black Silver Matt silver


DIMMING: Triac 1-10V DALI Smart lighting

KING KONG Series Integrated radiator with good quality, serialized size to meet different floors and scenes. Rigid thermal line design, highlighting the sense of science and technology, so named King Kong. The design of plastic pressure line cover is integrated with different color elements to present a more personalized appearance.

Dimension(mm)



ⓘ Ø75mm




ⓘ Ø90mm



ⓘ Ø125mm




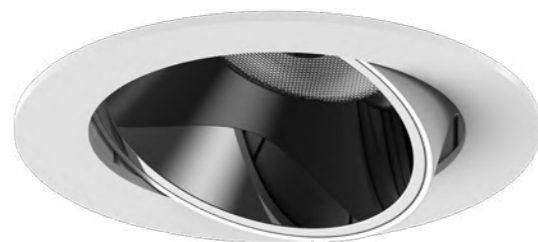

	OBS-MS75M-C&D	OBS-MS95M-C&D	OBS-MS125M-C&D
Type	Adjustable 30°+350°	Adjustable 30°+350°	Adjustable 30°+350°
Wattage	10W	20W	30W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
Lumen (lm)	1100	2200	3300
Cut-out (mm) ⓘ	Ø75	Ø95	Ø125
Size (DxHmm)	Ø85x80	Ø104x108	Ø132x127
N.W/PC (kgs)	0.3	0.51	0.84
Q'ty/CTN (pcs)	50	30	20

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White Black **CCT:** 3000K  6000K

OPTIONAL: Bright white Bright black Gun black Silver Matt silver


DIMMING: No dim Triac 1-10V DALI Smart lighting

MAMBA Series The asymmetrical radiator design of the integrated radiator shows its individual appearance. It can be rotated 360°, the maximum swing angle is 30°. Available to use in various scenes and projects. Few spotlights on the market can achieve deep anti-glare, and can do UGR<10 with honeycomb.


Dimension(mm)



ⓘ Ø75mm



ⓘ Ø95mm



ⓘ Ø125mm



DOWN LIGHT
(COB)




RAINBOW

LED Downlight

RINGS FOR OPTIONAL

- ◯ White
- ◯ Gold
- ◯ Silver mist
- ◯ Rose gold
- ◯ Bright silver
- ◯ Matte black
- ◯ Gun color

7 color rings for optional.

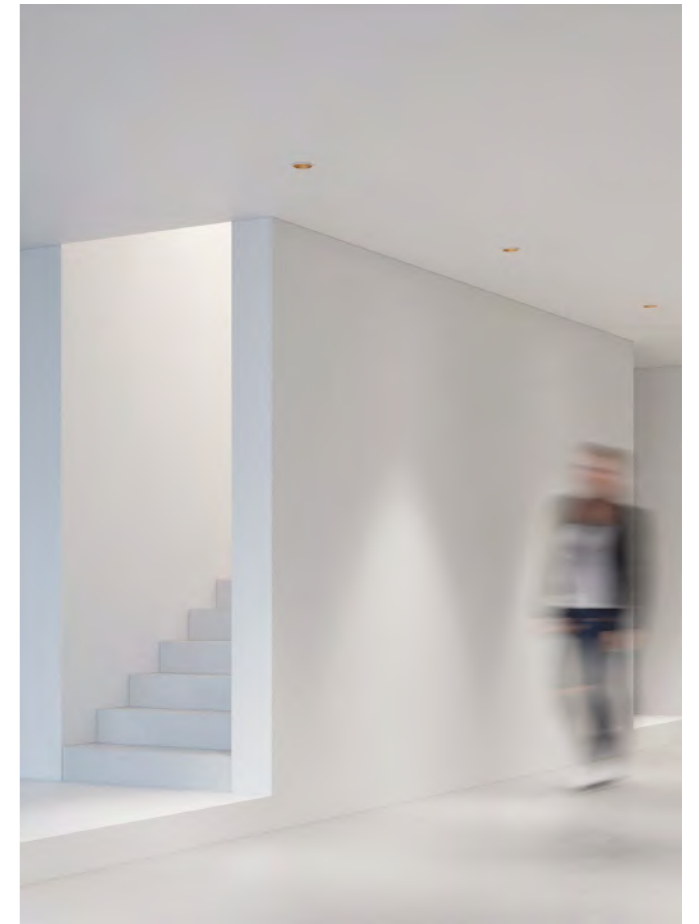

DOWN LIGHT
(COB)




LED downlight with die-casting housing, provides perfect and comfortable lighting and excellent thermal dissipation.



	OBS-TI65-C	OBS-TI75-C
Type	Fixed	Fixed
Wattage	7W	10W
Beam Angle	15°/24°/36°	15°/24°/36°
Lumen (lm)	662	950
Cut-out (mm) ⓘ	Ø65	Ø75
Size (DxHmm)	Ø75x60	Ø85x78
N.W/PC (kgs)	0.25	0.3
Q'ty/CTN (pcs)	36	36

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)



FINISH: ○ White ● Black



CCT: 3000K 6000K

OPTIONAL: ○ White ● Silver mist ● Bright silver ● Gun color
● Gold ● Rose gold ● Matte black


DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

RAINBOW Series LED Downlight with high efficiency Bridgelux COB chip, with external driver.
7 color rings for optional, meet your different needs.

Dimension(mm)



ⓘ Ø65mm



ⓘ Ø75mm




DOWN LIGHT
(COB)

DOWN LIGHT
(COB)



Type	OBS-2022-C				OBS-S2003-C			
	Fixed				Adjustable 15°			
Wattage	7W	12W	20W	30W	7W	12W	20W	30W
Beam Angle	38°				24°/38°			
Lumen (lm)	722	1232	2051	3143	735	1232	2051	3143
Cut-out (mm) ⓘ	Ø75	Ø90	Ø115	Ø145	Ø75	Ø85	Ø120	Ø140
Size (DxHmm)	Ø83x81	Ø100x105	Ø130x116	Ø160x125	Ø85x57	Ø97x73	Ø130x88	Ø165x95
N.W/PC (kgs)	0.21	0.23	0.52	0.7	0.22	0.32	0.58	0.75
Q'ty/CTN (pcs)	48	36	18	12	48	36	18	12





FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

SPRING Series LED downlight with high efficiency COB LED chip, external driver. Narrow frame design.

Dimension(mm)



ⓘ Ø75/Ø90/Ø115/Ø145mm



ⓘ Ø75/Ø85/Ø120/Ø140mm






Type	OBS-S2001-R-C				OBS-S2001-S-C			
	Adjustable 15°				Adjustable 15°			
Wattage	7W	12W	20W	30W	7W	12W	20W	30W
Beam Angle	24°/38°				24°/38°			
Lumen (lm)	726	1325	2298	3623	726	1325	2298	3623
Cut-out (mm) ⓘ	Ø75	Ø85	Ø120	Ø145	Ø75	Ø85	Ø120	Ø150
Size (DxHmm)	Ø85x68	Ø100x87	Ø140x105	Ø175x115	85x85x68	100x100x87	140x140x105	175x175x115
N.W/PC (kgs)	0.2	0.3	0.52	0.75	0.22	0.35	0.58	0.75
Q'ty/CTN (pcs)	48	36	18	12	48	36	18	12

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

SPRING Series LED downlight with high efficiency COB LED chip, external driver. Round and square frame for optional. Tilting adjustable 15°.

Dimension(mm)




ⓘ Ø75/Ø85/Ø120/Ø145mm




ⓘ Ø75/Ø85/Ø120/Ø150mm



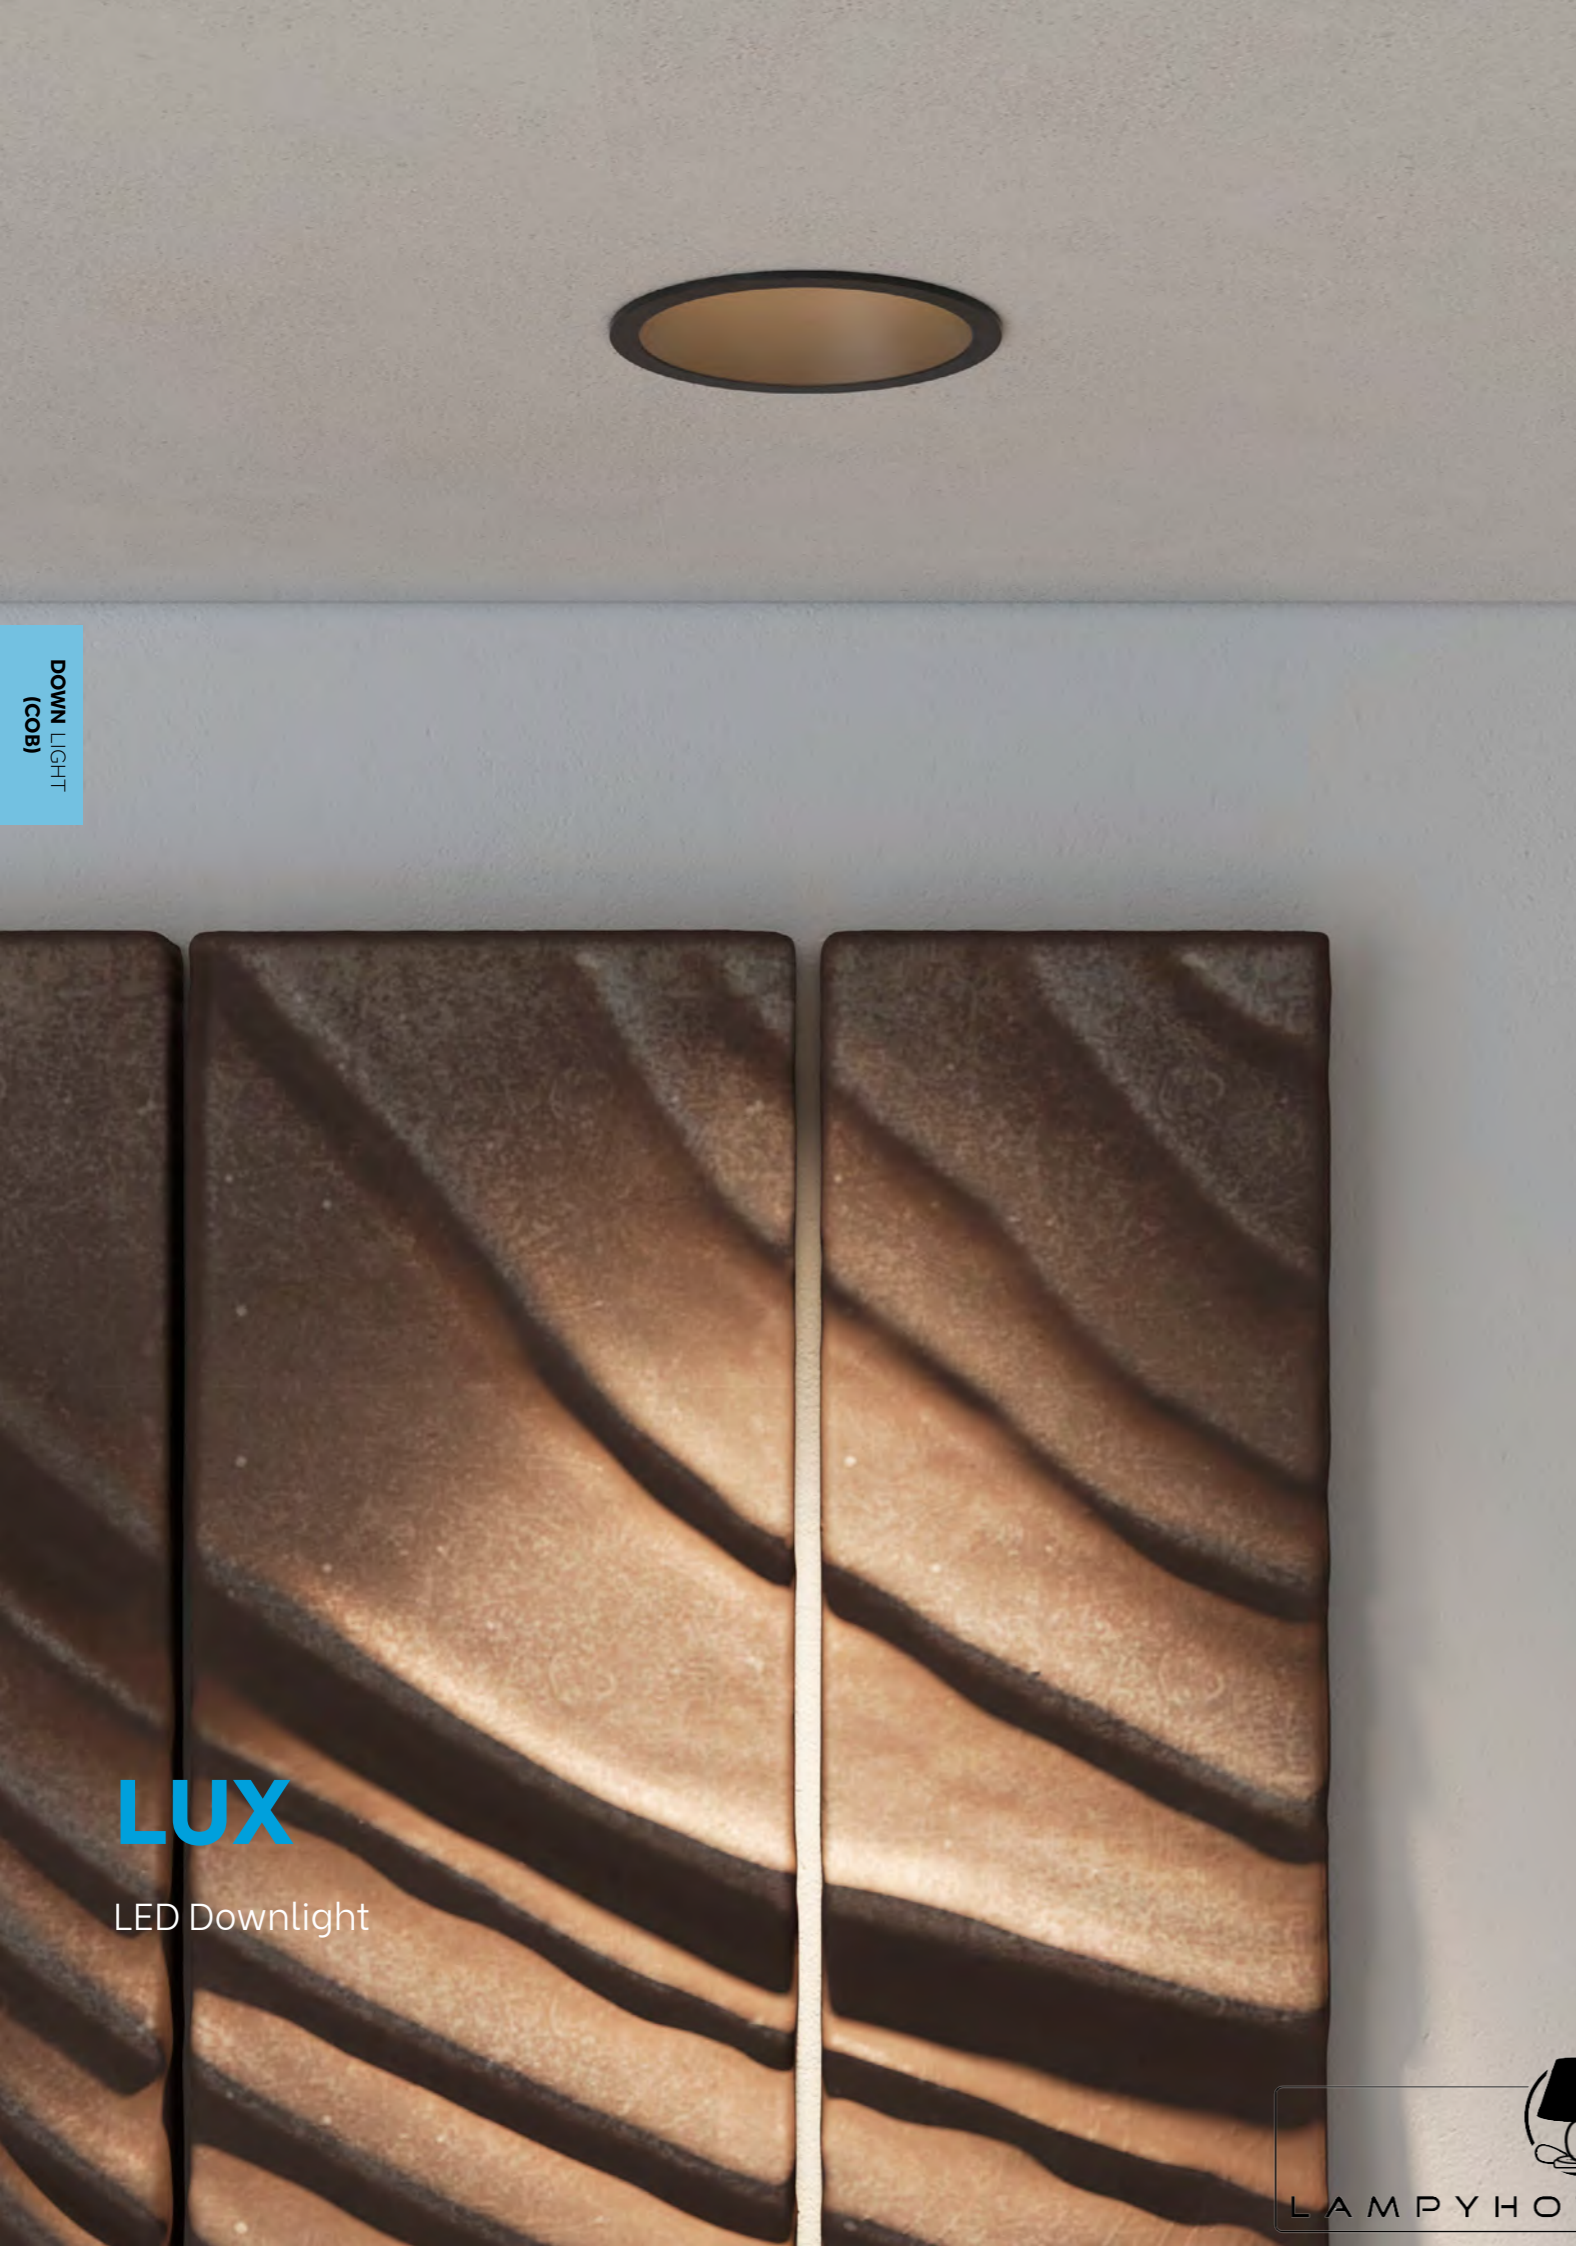

DOWN LIGHT
(COB)

LUX
LED Downlight

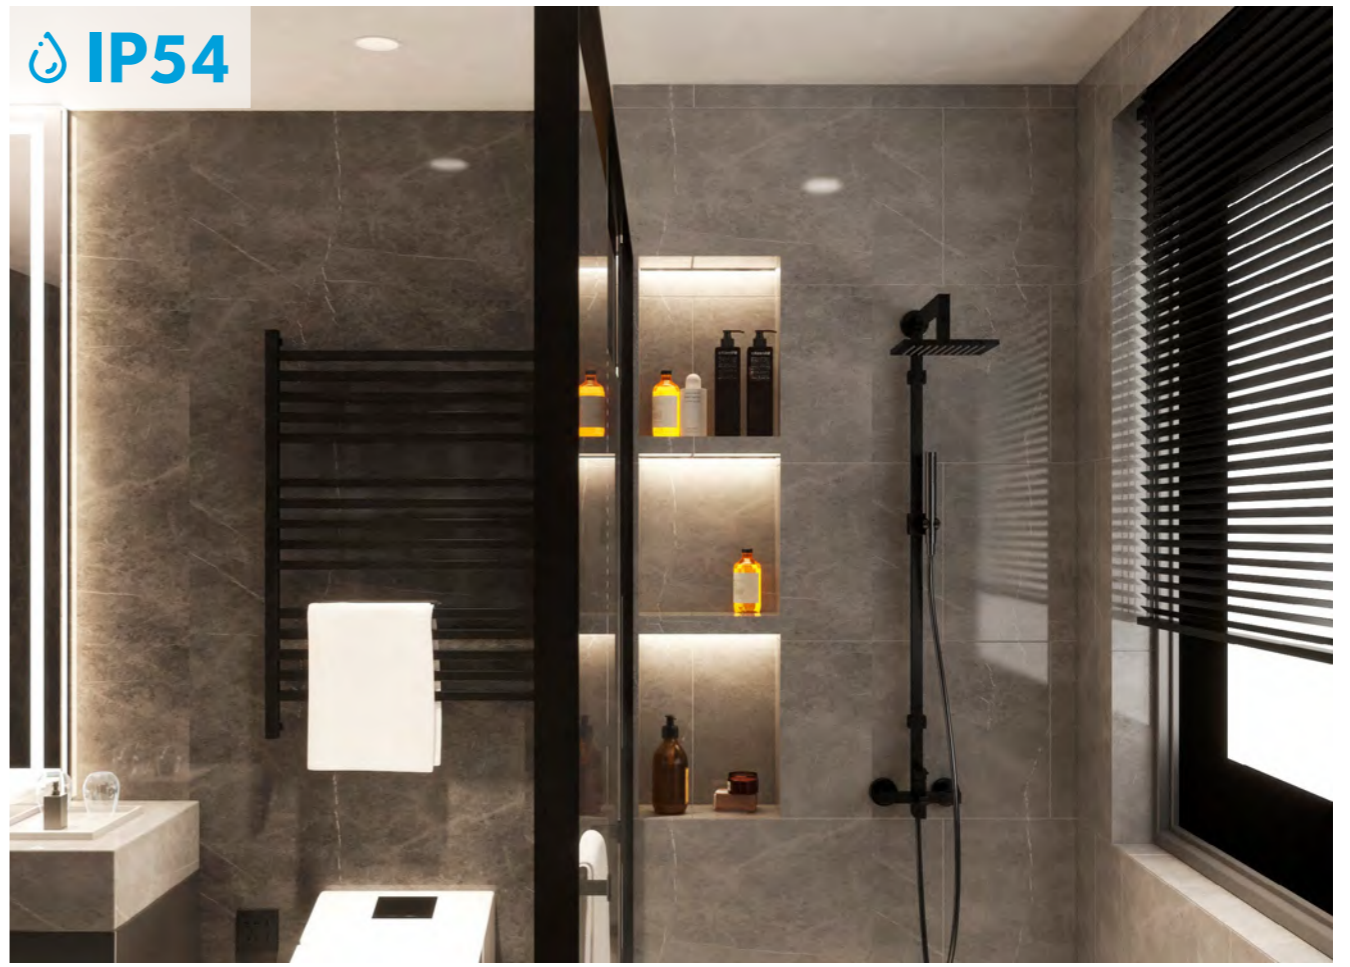

IP54

DOWN LIGHT
(COB)

RECESSED SPOTLIGHT

High CRI downlight is available in two versions, fixed or tilting. One heat sink can do three items Downlight, easily to change the frame.






	LUX-DL03D-C	LUX-SP03D-C	LUX-DL03D-1-C
Type	Fixed	Adjustable 15°	Fixed
Wattage	10W	10W	10W
Beam Angle	36°/60°	15°/24°/38°/60°	36°/60°
Lumen (lm)	978	978	978
Cut-out (mm) ⓘ	Ø75-85	Ø85-95	Ø90
Size (DxHmm)	Ø90x52	Ø102x58	Ø102x70
N.W/PC (kgs)	0.3	0.37	0.34
Q'ty/CTN (pcs)	50	50	50

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: ○ White ● Silver ● Black **CCT:** 3000K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

LUX Series with COB Bridgelux LED chip, external driver. Luminarie color can be black, white and silver for optional. One heat sink can do three Downlight, easily to change the frame. Fixed Downlight and adjustable Downlight for optional.

Dimension(mm)

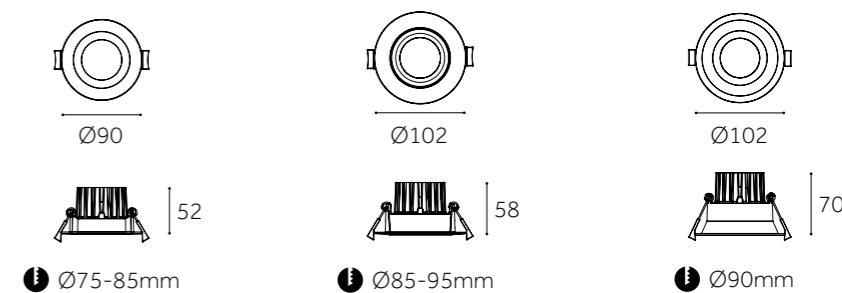




	JL-CE04GM-C&D	JL-CE04TM-C&D	JL-CE04RM-C&D
Type	Fixed	Adjustable 70°	Adjustable 70°
Wattage	9W/12W/14W/21W	9W/12W/14W/21W	9W/12W/14W/21W
Beam Angle	16°/24°/50°	16°/24°/50°	16°/24°/50°
Lumen (lm)	1081/1415/1679/2438	1081/1415/1679/2438	874/1150/1369/1990
Cut-out (mm) ⓘ	Ø110	Ø110	Ø110
Size (DxHmm)	Ø120x88	Ø120x97	Ø120x97
N.W/PC (kgs)	0.53	0.53	0.54
Q'ty/CTN (pcs)	18	18	18

DOWN LIGHT (COB)

DOWN LIGHT (COB)





FINISH: ○ White ● Silver ● Black **CCT:** 3000K  6000K

DIMMING: Triac 1-10V DALI Smart lighting

GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminarie color can be black, white and silver for optional. Durable die-casting aluminum body with good heat sink. High efficiency COB chip. Multi-reflectors for your optional.

Dimension(mm)

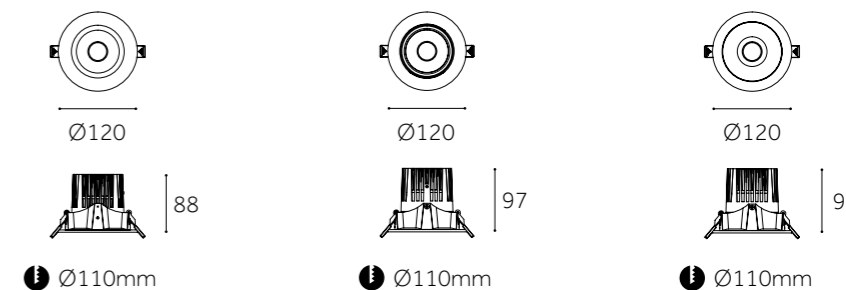


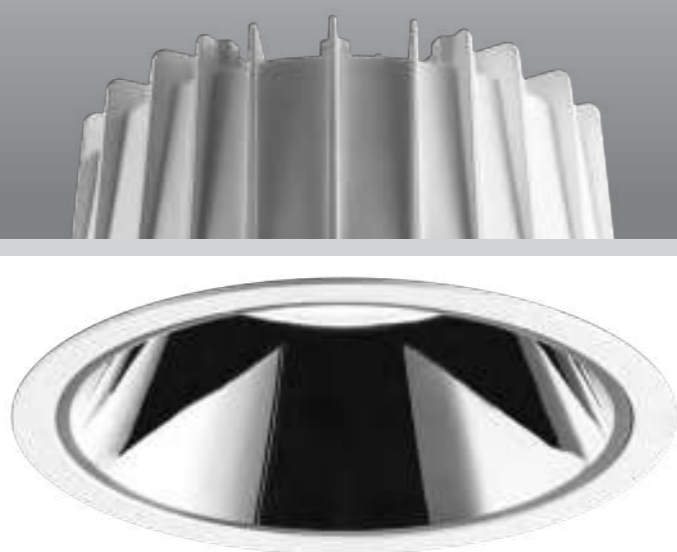

	OBS-4809-C	OBS-4815-C	OBS-4820-C	OBS-4824-C	OBS-4830-C	OBS-4840-C
Type	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	9W	15W	20W	24W	30W	40W
Beam Angle	60°	60°	60°	60°	60°	60°
Lumen (lm)	725-828	1208-1380	1610-1840	1932-2208	2415-2760	3220-3680
Cut-out (mm) ⓘ	Ø75	Ø90	Ø110	Ø135	Ø160	Ø190-200
Size (DxHmm)	Ø83x49	Ø100x56	Ø122x66	Ø145x76	Ø173x86	Ø210x103
N.W/PC (kgs)	0.18	0.27	0.42	0.48	0.64	0.94
Q'ty/CTN (pcs)	100	50	30	20	20	10

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: ○ White ● Black **CCT:** 3000K 6000K

DIMMING: ✓ No dim ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

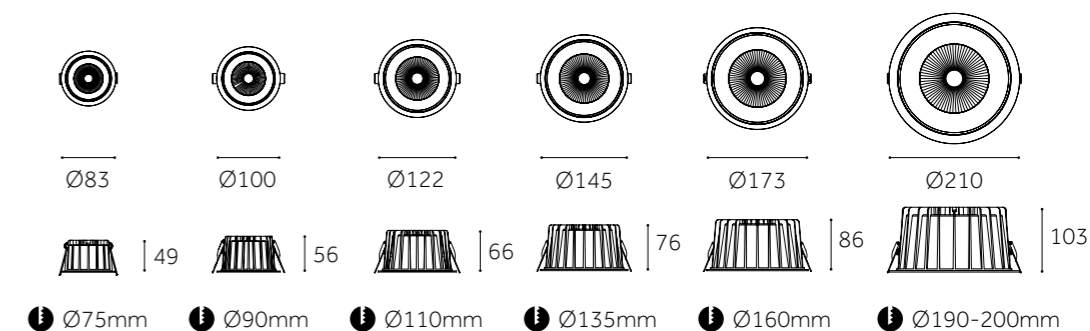




	OBS-4706-C	OBS-4709-C	OBS-4712-C
Type	Fixed	Fixed	Fixed
Wattage	6W	9W	12W
Beam Angle	15°/30°/45°	15°/30°/45°	15°/30°/45°
Lumen (lm)	483-552	725-828	966-1104
Cut-out (mm) ⓘ	Ø55	Ø75	Ø75
Size (DxHmm)	Ø60x50	Ø85x66	Ø85x66
N.W/PC (kgs)	0.16	0.22	0.22
Q'ty/CTN (pcs)	100	50	50

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White Black **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

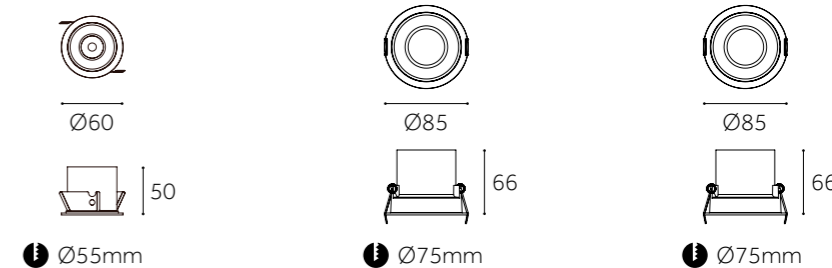




Type	OBS-6851R-C		OBS-6852R-C	
	Fixed		Fixed	
Wattage	12W	15W	20W	24W
Beam Angle	12°		12°	
Lumen (lm)	966-1104	1208-1380	1610-1840	1932-2208
Cut-out (mm) ⓘ	Ø75		Ø95	
Size (DxHmm)	Ø85x80		Ø105x100	
N.W/PC (kgs)	0.34		0.64	
Q'ty/CTN (pcs)	50		50	30

DOWN LIGHT (COB)

DOWN LIGHT (COB)





FINISH: White Black **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

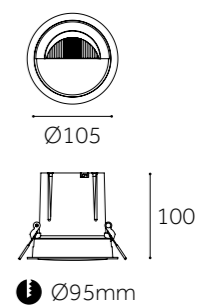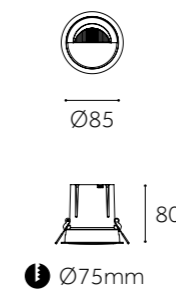




	OBS-6102-C		OBS-6103-C	OBS-6104-C	OBS-6105-C	OBS-6106-C	OBS-6109-C
Type	Fixed		Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	6W	9W	12W	15W	20W	30W	40W
Beam Angle	24°/38°		24°/38°	24°/38°	24°/38°	24°/38°	24°/38°
Lumen (lm)	483-552	725-828	966-1104	1208-1380	1610-1840	2415-2760	3220-3680
Cut-out (mm) ⓘ	Ø75		Ø75	Ø95	Ø125	Ø125	Ø150
Size (DxHmm)	Ø85x88		Ø85x100	Ø105x110	Ø138x123	Ø138x138	Ø160x150
N.W/PC (kgs)	0.2		0.27	0.36	0.59	0.73	0.88
Q'ty/CTN (pcs)	50		50	50	12	8	8

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: ○ White ● Black **CCT:** 3000K 6000K

DIMMING: ✓ No dim ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

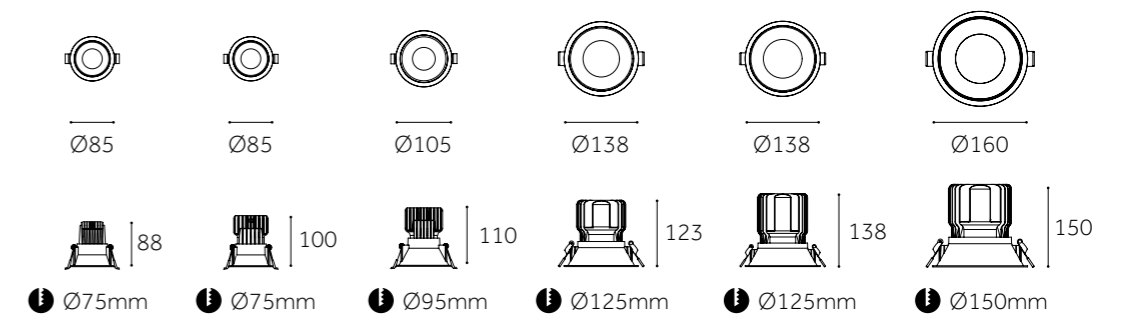





DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

	OBS-6112-C		OBS-6113-C
Type	Fixed		Fixed
Wattage	6W	9W	12W
Beam Angle	24°/38°		24°/38°
Lumen (lm)	483-552	725-828	966-1104
Cut-out (mm) 	75x75		75x75
Size (DxHmm)	85x85x88		85x85x100
N.W/PC (kgs)	0.21		0.27
Q'ty/CTN (pcs)	50		50




FINISH: White Black


CCT: 3000K 6000K



DIMMING: No dim Triac 1-10V DALI Smart lighting


VELA Series Attractive appearance, high quality pure aluminium housing, good heat dissipation and erosion resistant. Adopts constant current supply to start up the light quickly.

Dimension(mm)



 75x75mm




 75x75mm




DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

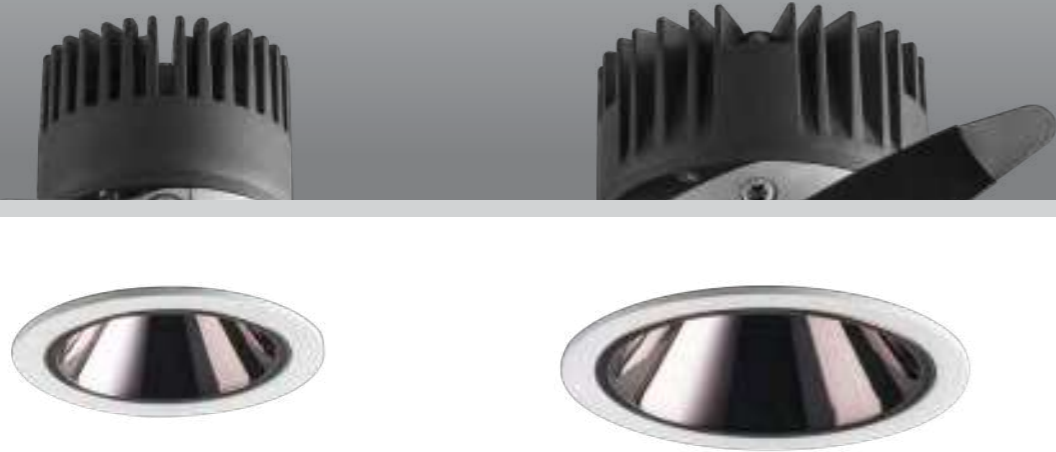

	OBS-6704-C	OBS-6705-C	OBS-6706-C	OBS-6707-C
Type	Fixed	Fixed	Fixed	Fixed
Wattage	8W	10W	10W	15W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°
Lumen (lm)	644-736	805-920	805-920	1208-1380
Cut-out (mm) ⓘ	Ø55	Ø55	Ø75	Ø75
Size (DxHmm)	Ø63x64	Ø63x85	Ø85x70	Ø85x83
N.W/PC (kgs)	0.15	0.18	0.27	0.3
Q'ty/CTN (pcs)	50	50	50	50




FINISH: White Black **CCT:** 3000K 6000K


DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

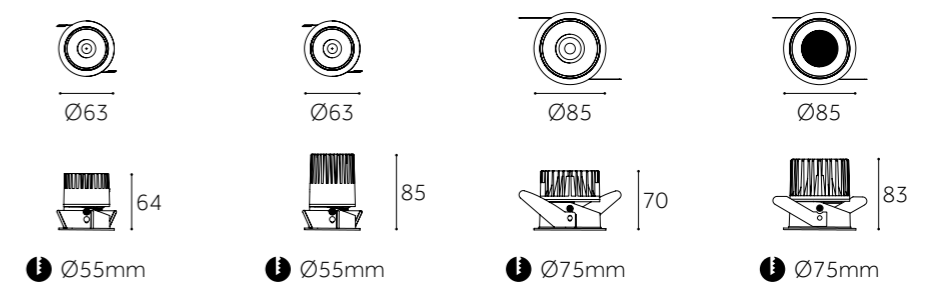




	OBS-4071B-C		OBS-4073B-C	OBS-4075B-C	
Type	Adjustable 30°		Adjustable 30°	Adjustable 30°	
Wattage	12W	15W	20W	28W	33W
Beam Angle	15°/24°/38°		15°/24°/38°	15°/24°/38°	
Lumen (lm)	1104-1242	1380-1553	1840-2070	2576-2898	3036-3416
Cut-out (mm) 	Ø115		Ø170	Ø200	
Size (DxHmm)	Ø130x122		Ø190x160	Ø220x189	
N.W/PC (kgs)	0.34		0.81	1.05	
Q'ty/CTN (pcs)	16		12	108	

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Black **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

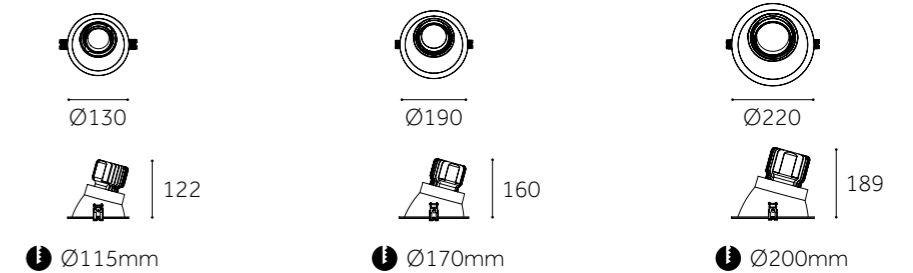

DOWN LIGHT
(COB)

OBS-S681
6W/9W
15°/24°/36°
Ø46x55

OBS-6810R
Ø65x40
Cut-out: Ø55

OBS-6811R
Ø65x36
Cut-out: Ø55

OBS-6812R
Ø65x36
Cut-out: Ø55

OBS-6816R
Ø59.5x27
Cut-out: Ø60

OBS-S682
6W/9W
15°/24°/36°
Ø58x49

OBS-S683
12W/15W
15°/24°/36°
Ø58x72

OBS-6820R
Ø85x54
Cut-out: Ø75

OBS-6825R
Ø110x52
Cut-out: Ø100

OBS-6830R
Ø85x54
Cut-out: Ø75

OBS-6861R
Ø105x60
Cut-out: Ø90

OBS-6821R
Ø85x54
Cut-out: Ø75

OBS-6826R
Ø74.5x33
Cut-out: Ø75

OBS-6831R
Ø85x54
Cut-out: Ø75

OBS-6866R
Ø89.5x33
Cut-out: Ø90

OBS-6822S
85x85x58
Cut-out: 75x75

OBS-6827R
Ø74.5x33
Cut-out: Ø75

OBS-6832S
72x72x58
Cut-out: 75x75

OBS-6867R
Ø89.5x33
Cut-out: Ø90

OBS-6824R
Ø85x55
Cut-out: Ø75

OBS-6829R
Ø85x38
Cut-out: Ø75

OBS-6860R
Ø105x60
Cut-out: Ø90

OBS-S687
20W/24W
15°/24°/36°
Ø77x88

OBS-6870R
Ø115x66
Cut-out: Ø100

OBS-6871R
Ø115x66
Cut-out: Ø100

OBS-6872S
112x112x74
Cut-out: 100x100

OBS-6874R
Ø110x65
Cut-out: Ø100

OBS-6875R
Ø135x63
Cut-out: Ø120

OBS-6876R
Ø99.5x33
Cut-out: Ø100

OBS-6877R
Ø99.5x33
Cut-out: Ø100

OBS-S688
28W/33W
15°/24°/36°
Ø87x105

OBS-6880R
Ø140x78
Cut-out: Ø125

OBS-6881R
Ø140x78
Cut-out: Ø125

OBS-6882S
140x140x84
Cut-out: 125x125

OBS-6884R
Ø138x87
Cut-out: Ø125

OBS-6885R
Ø145x75
Cut-out: Ø130

OBS-6886R
Ø119.7x33
Cut-out: Ø120

OBS-6887R
Ø119.7x33
Cut-out: Ø120

OBS-S689
38W/42W
15°/24°/36°
Ø102x116

OBS-6890R
Ø165x86
Cut-out: Ø150

OBS-6891R
Ø165x86
Cut-out: Ø150


OBS-6892S
165x165x91
Cut-out: 150x150


OBS-6897R
Ø145x33
Cut-out: Ø145

OBS-6894R
Ø165x104
Cut-out: Ø150

OBS-6896R
Ø145x33
Cut-out: Ø145


DOWN LIGHT
(COB)

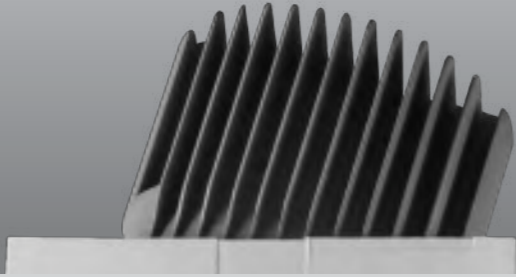

	OBS-1031B-C	OBS-1041B-C	OBS-1051B-C	
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°	
Wattage	15W	20W	30W	40W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	
Lumen (lm)	1380-1553	1840-2070	2760-3105	3680-4140
Cut-out (mm) 	105x105	140x140	160x160	
Size (WxLxHmm)	116x116x98	160x160x120	176x176x134	
N.W/PC (kgs)	0.48	1.0	1.29	1.47
Q'ty/CTN (pcs)	20	10	10	

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Black

CCT: 3000K 6000K


DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

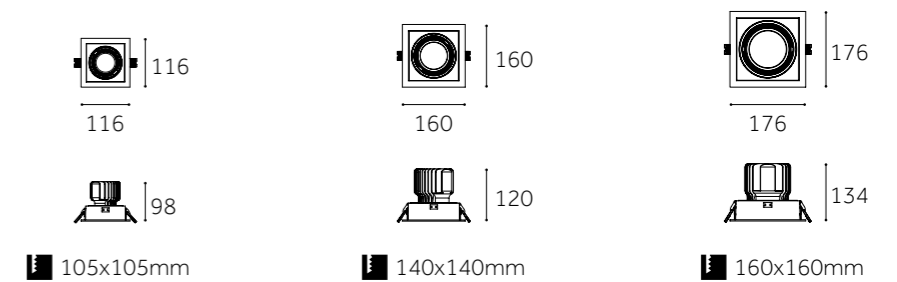




	OBS-1032B-C	OBS-1042B-C	OBS-1052B-C	
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°	
Wattage	15Wx2	20Wx2	30Wx2	40Wx2
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	
Lumen (lm)	1380x2-1553x2	1840x2-2070x2	2760x2-3105x2	3680x2-4140x2
Cut-out (mm) 	200x105	270x140	310x160	
Size (WxLxHmm)	214x116x84	290x160x120	325x176x134	
N.W/PC (kgs)	1.0	1.59	2.43	2.79
Q'ty/CTN (pcs)	10	10	10	

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White Black **CCT:** 3000K 6000K


DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

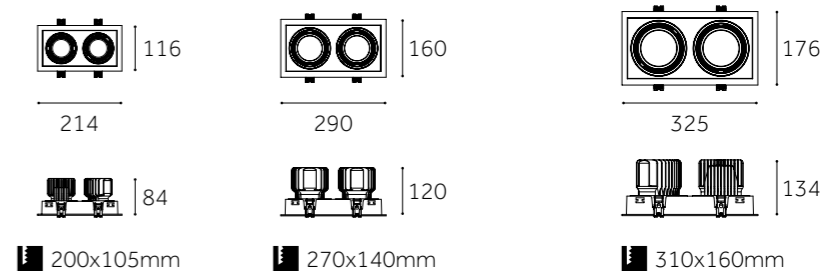




	OBS-1033B-C	OBS-1043B-C	OBS-1053B-C	
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°	
Wattage	15Wx3	20Wx3	30Wx3	40Wx3
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	
Lumen (lm)	1380x3-1553x3	1840x3-2070x3	2760x3-3105x3	3680x3-4140x3
Cut-out (mm) 	290x105	400x140	460x160	
Size (WxLxHmm)	307x116x84	420x160x120	474x176x134	
N.W/PC (kgs)	1.47	2.38	3.02	3.56
Q'ty/CTN (pcs)	10	8	8	6

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White Black **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

VELA Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

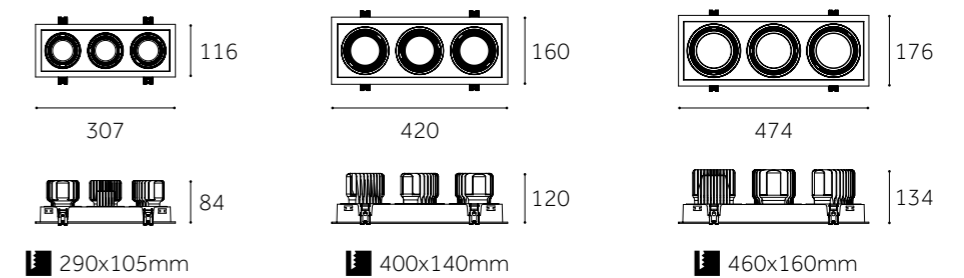




	NS-DL05M-C	NS-DD3216-C
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	10W/15W/20W/25W	10Wx2/15Wx2/20Wx2/25Wx2
Beam Angle	15°/25°/40°	15°/25°/40°
Lumen (lm)	1100/1650/2200/2750	2200/3300/4400/5500
Cut-out (mm)	Ø122	290x140
Size (DxHmm)	Ø130x162.5	320x160x162.5
N.W/PC (kgs)	1.16	2.97
Q'ty/CTN (pcs)	12	4

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)





FINISH: ○ White ● Silver ● Black

CCT: 3000K 6000K



DIMMING:  Non-Dimmable

ARTEMIS Series products design with various installation options of surface-mounted, recessed, track and pendant. It provides excellent lighting effect for commercial space such as supermarkets and shops. 350 degree rotatable, 60 degree adjustable, the lamp head can be stretched to meet the adjustment of the different area. Button locked the angle, safe and convenient. 15°,25°,40° beam angle for COB version, 95° beam angle for SMD version.

Dimension(mm)



Ø122mm

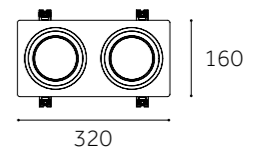

290x140mm






	WS-SP1415M-C	WS-DD3216M-C
Type	Adjustable 60°+355°	Adjustable 60°+355°
Wattage	10W/15W/20W/25W	10Wx2/15Wx2/20Wx2/25Wx2
Beam Angle	15°/30°/40°	15°/30°/40°
Lumen (lm)	1127/1711/2332/2865	2447/3735/5023/6300
Cut-out (mm) ⓘ	Ø125	290x140
Size (DxHmm)	Ø145x153	320x160x153.5
N.W/PC (kgs)	0.97	2.72
Q'ty/CTN (pcs)	12	4

DOWN LIGHT (COB)

DOWN LIGHT (COB)



FINISH: ○ White ● Silver ● Black **CCT:** 3000K — 6000K


DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

WARRIOR Series with COB luminus LED chip, external driver. DIY family series. LED recessed Downlight, LED grille light and LED track light. Rotatable angle 355° and titable angle 60°. Luminarie color can be black, white and silver for optional. Three beam angle 15°/30°/40° for your selection by change of the reflector cup inside.

Dimension(mm)






	RS-DD01-C&D	RS-DD02-C&D	RS-DD03-C&D
Type	Adjustable 60°+350°	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	20W/28W/38W	20Wx2/28Wx2/38Wx2	20Wx3/28Wx3/38Wx3
Beam Angle	60°	60°	60°
Lumen (lm)	2209/3123/4127	4400/6160/8360	6600/9240/12540
Cut-out (mm) 	185x185	185x340	185x510
Size (WxLxHmm)	200x200x150	365x200x150	530x200x150
N.W/PC (kgs)	1.5	3.5	4.5
Q'ty/CTN (pcs)	8	4	3

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

RS-DD Series The special advantage of round adjustable Downlight is its adjustable lighting direction, which is 60°vertically and 350°rotatable. Die-casting aluminum shell design makes it with an excellent heat dissipation performance. The high efficiency of this Downlight can reach 110lm/w and CRI is greater than 80 for making everything look more real.

Dimension(mm)

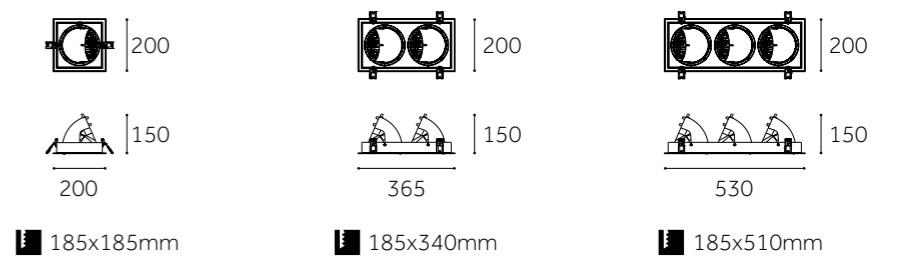


DOWN LIGHT
(COB)



LUX

LED Grill Light


Single head, double heads and triple heads provide more choices for you. High CRI brings excellent lighting effect, adjustable direction offers various lighting orientation.

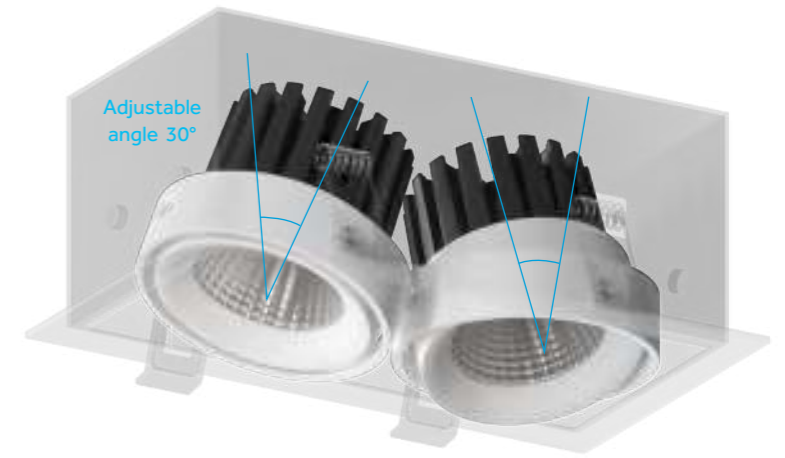

DOWN LIGHT
(COB)






	LUX-DD1010-C	LUX-DD1810-C	LUX-DD2810-C
Type	Adjustable 30°	Adjustable 30°	Adjustable 30°
Wattage	10W	20W	30W
Beam Angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°
Lumen (lm)	1050	2200	3300
Cut-out (mm) 	95x95	175x95	265x95
Size (WxLxHmm)	105x105x80	185x105x80	277x105x80
N.W/PC (kgs)	1.8	1.8	1.8
Q'ty/CTN (pcs)	8	8	8

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White Black

CCT: 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

LUX Series LED Grill Light with high-performance heat sink, lens with reflector make the light uniform, 15°/24°/38°/60° beam angle for your options.


Dimension(mm)

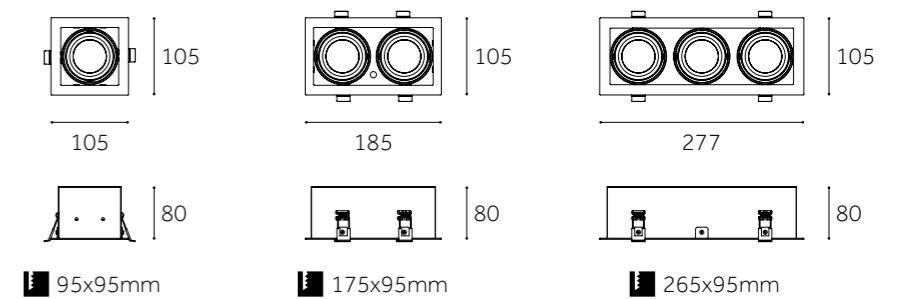


DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

	TY-DD1918M-C	TY-DD3218M-C
Type	Adjustable 30°	Adjustable 30°
Wattage	12W/14W/20W/24W/30W	12Wx2/14Wx2/20Wx2/24Wx2/30Wx2
Beam Angle	12°/24°/60°	12°/24°/60°
Lumen (lm)	1461/1794/2323/2990/3588	2875/3588/4784/5750/7073
Cut-out (mm) 	165x165	305x170
Size (WxLxHmm)	187x187x165	326x187x165
N.W/PC (kgs)	1.8	3.1
Q'ty/CTN (pcs)	8	8




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

TY Series LED Grill Light with high-performance heat sink, lens with reflector make the light uniform. 12°/24°/60° beam angle for your options. It can adapt different kinds of specification track head, meeting your different requirements.

Dimension(mm)




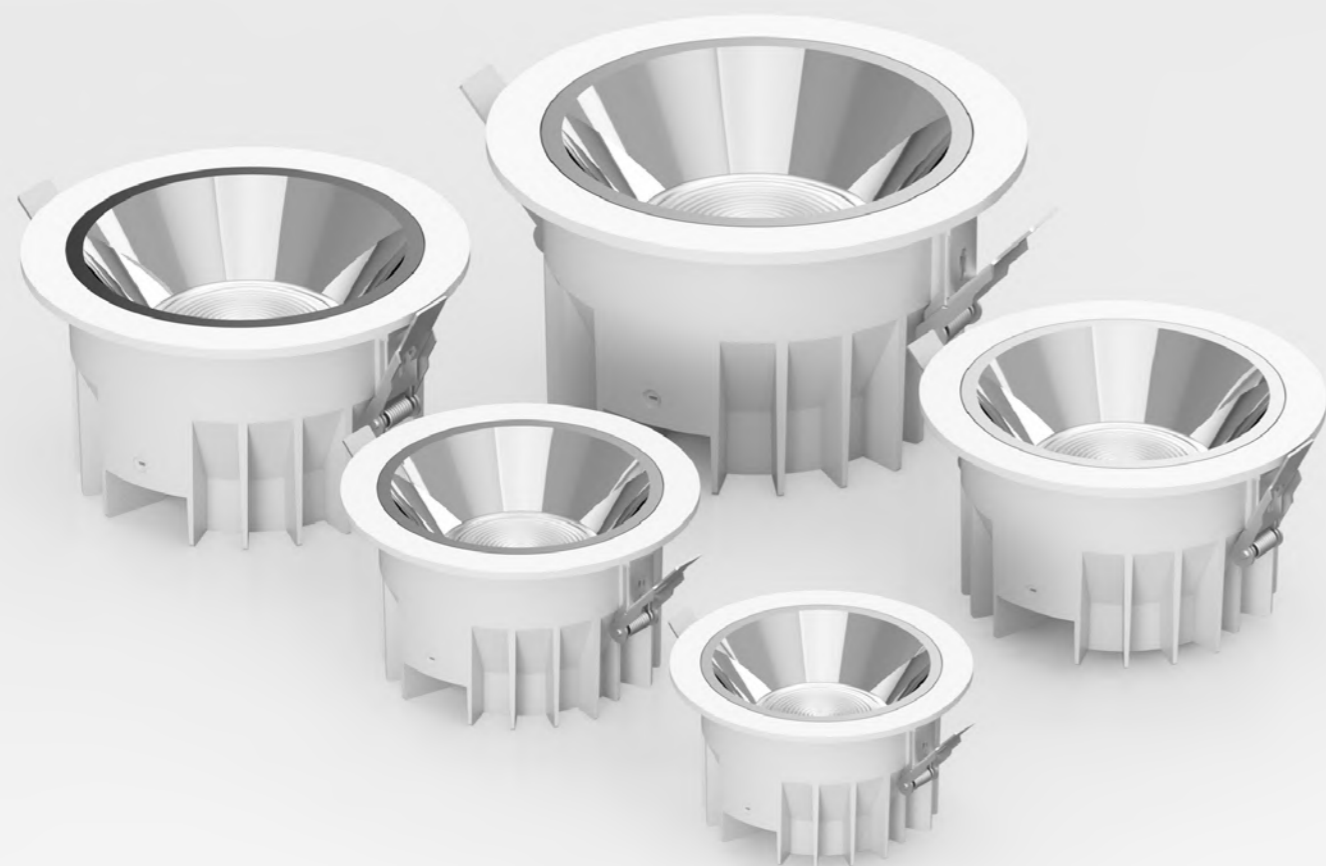

	FT-DL3001E	FT-DL4001E	FT-DL5001E	FT-DL6001E	FT-DL8001E
Type	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	20W	30W	40W	50W
Beam Angle	60°	60°	60°	60°	60°
Cut-out (mm) ⓘ	Ø100	Ø125	Ø145	Ø180	Ø215
Size (DxHmm)	Ø115x65	Ø140x80	Ø160x85	Ø198x98	Ø230x102
Q'ty/CTN (pcs)	50	40	30	18	12

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White

CCT: 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

SOAR Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.


Dimension(mm)

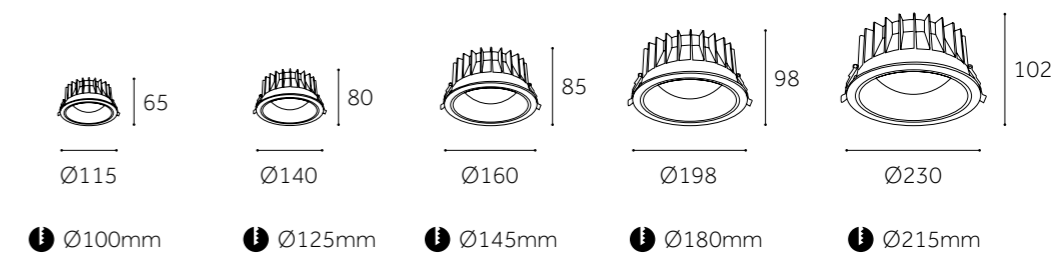


DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

	FT-DL3001F	FT-DL4001F	FT-DL5001F	FT-DL6001F
Type	Fixed	Fixed	Fixed	Fixed
Wattage	10W	20W	30W	40W
Beam Angle	60°	60°	60°	60°
Cut-out (mm) 	100x100	125x125	145x145	180x180
Size (WxLxHmm)	115x115x60	140x140x75	160x160x80	195x195x95
Q'ty/CTN (pcs)	50	40	30	18




FINISH: White


CCT: 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

SOAR Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

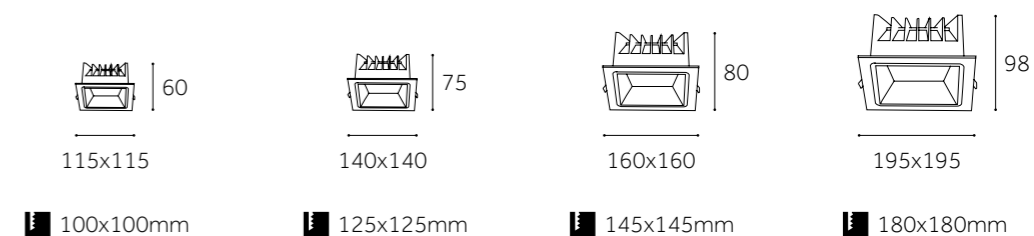


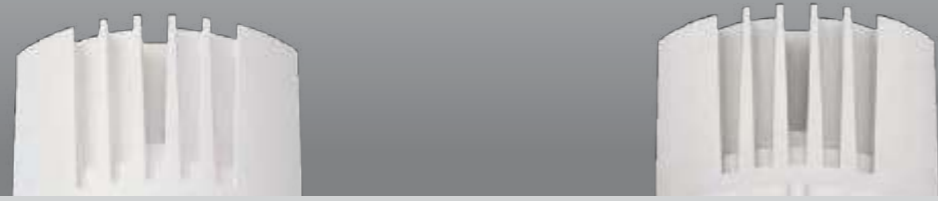

	HH-T2511A	HH-T3011A	HH-T4011A	HH-T3011B	HH-T4011B
Type	Fixed	Fixed	Fixed	Adjustable 30°	Adjustable 30°
Wattage	12W	20W	35W	20W	35W
Beam Angle	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°
Cut-out (mm) ⓘ	Ø75	Ø95	Ø125	Ø125	Ø150
Size (DxHmm)	Ø85x70	Ø108x85	Ø135x97	Ø138x90	Ø165x100
Q'ty/CTN (pcs)	50	30	18	12	8

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White


CCT: 3000K — 6000K


DIMMING: No dim Triac 1-10V DALI Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

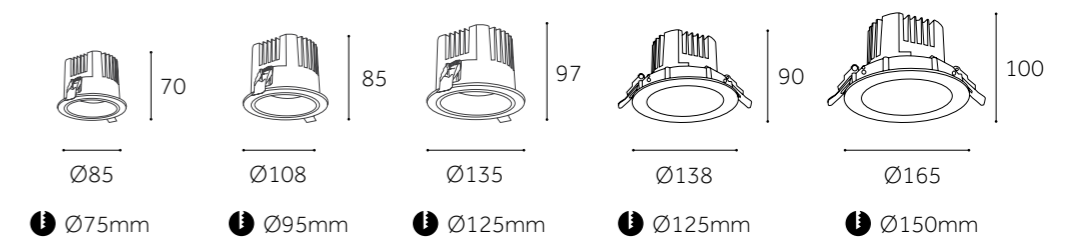


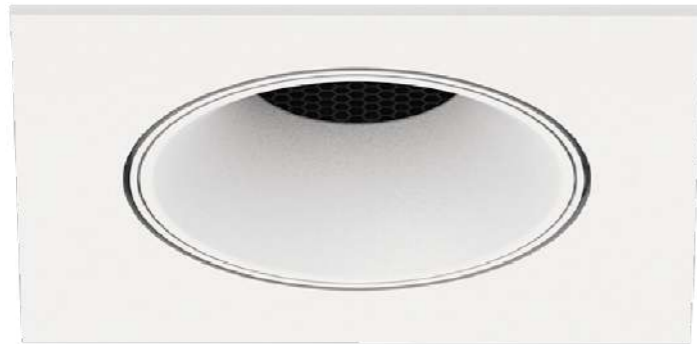

	HH-T2511A-1	HH-T3011A-1	HH-T4011A-1
Type	Fixed	Fixed	Fixed
Wattage	12W	20W	35W
Beam Angle	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°
Cut-out (mm) 	100x100	125x125	150x150
Size (WxLxHmm)	115x115x70	138x138x85	163x163x97
Q'ty/CTN (pcs)	30	18	12

DOWN LIGHT (COB)

DOWN LIGHT (COB)




FINISH: White **CCT:** 3000K 6000K


DIMMING: No dim Triac 1-10V DALI Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

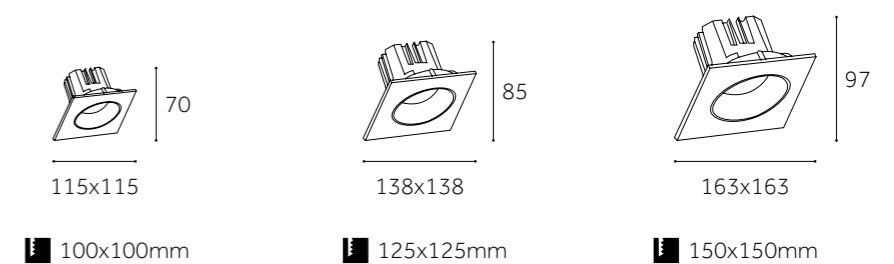




	HH-T2511A-2	HH-T3011A-2	HH-T4011A-2
Type	Fixed	Fixed	Fixed
Wattage	12Wx2	20Wx2	35Wx2
Beam Angle	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°
Cut-out (mm) 	215x100	263x125	315x150
Size (WxLxHmm)	230x115x70	278x138x85	330x163x97
Q'ty/CTN (pcs)	20	12	8

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White

CCT: 3000K 6000K


DIMMING: No dim Triac 1-10V DALI Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

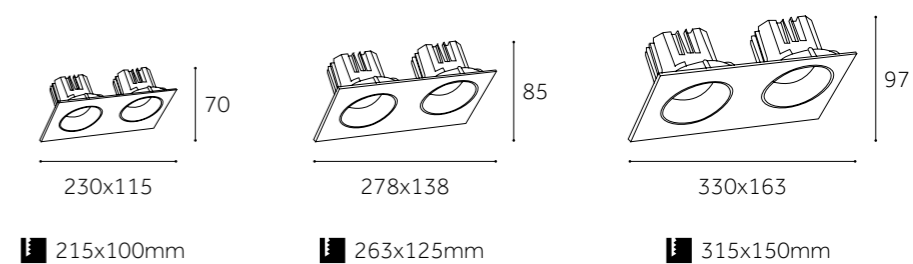




	HH-T2511A-3	HH-T3011A-3	HH-T4011A-3
Type	Fixed	Fixed	Fixed
Wattage	12Wx3	20Wx3	35Wx3
Beam Angle	15°/23°/38°/60°	15°/23°/38°/60°	15°/23°/38°/60°
Cut-out (mm) 	335x100	400x125	480x150
Size (WxLxHmm)	350x115x70	417x138x85	495x163x97
Q'ty/CTN (pcs)	12	8	6

DOWN LIGHT (COB)

DOWN LIGHT (COB)





FINISH: White **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

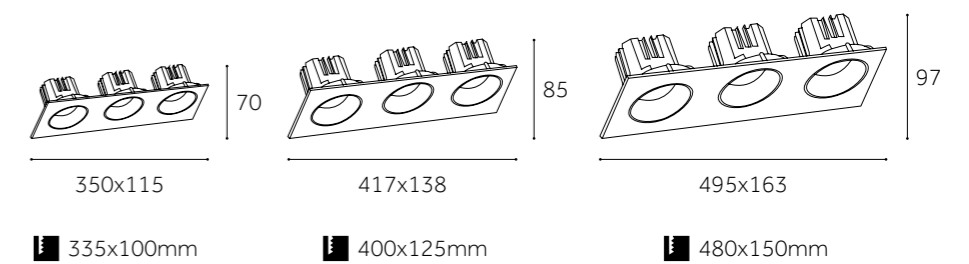


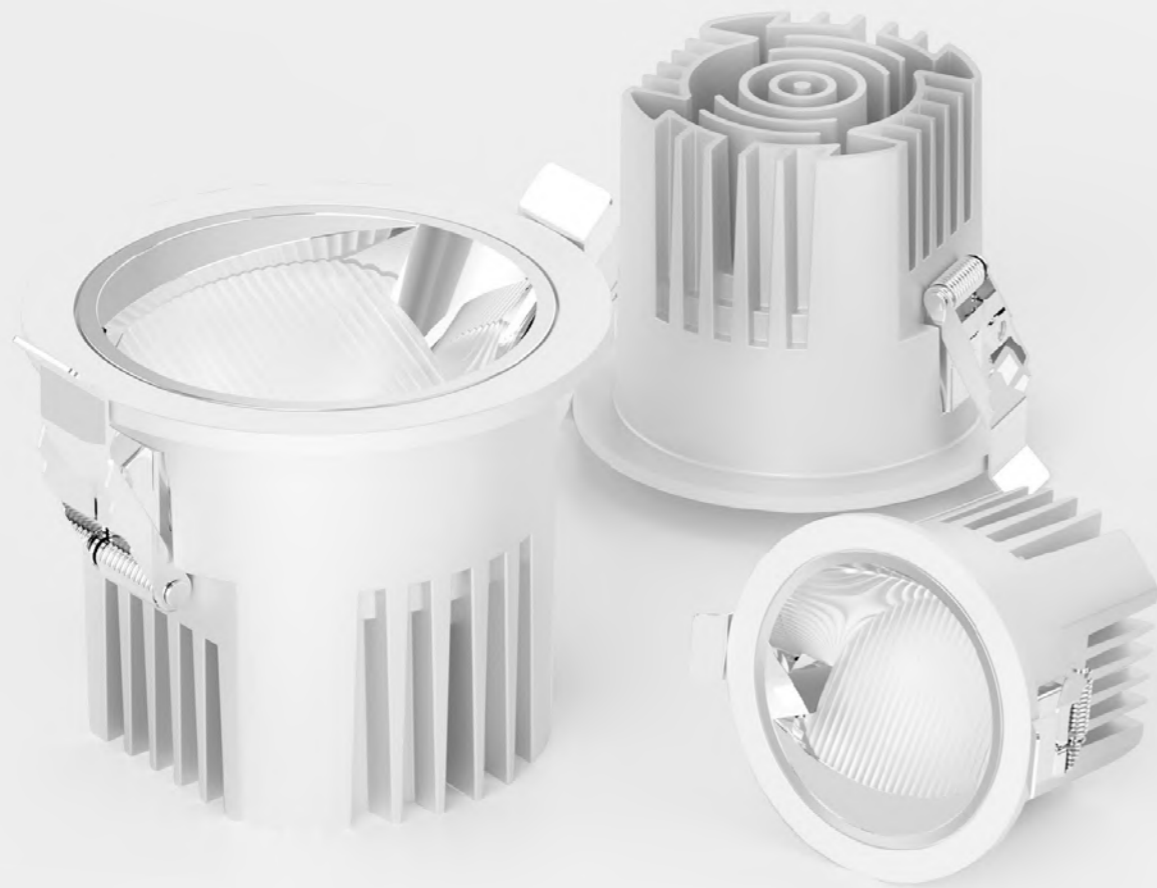

	HH-T2511	HH-T3011	HH-T4011
Type	Fixed	Fixed	Fixed
Wattage	12W	20W	35W
Beam Angle	15°/23°/38°	15°/23°/38°	15°/23°/38°
Cut-out (mm) ⓘ	Ø75	Ø95	Ø125
Size (DxHmm)	Ø85x70	Ø108x85	Ø135x97

DOWN LIGHT
(COB)

DOWN LIGHT
(COB)




FINISH: White

CCT: 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

VAST Series Light source:full spectrum COB LED module, improve color reproduction, Cooling system: passive cooling(perfect design of air convection) heat sink made from die-cast aluminium, using high-quality, environmental protection and no pollution.Optic:unique optical design, highly efficient with uniform distribution, precise light distribution, anti-glare.

Dimension(mm)

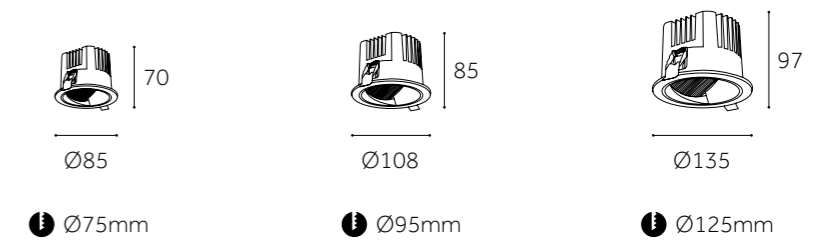


DOWN LIGHT
(COB)




DOWN LIGHT
(COB)

STARS A

LED Downlight




ADJUSTABLE
30°

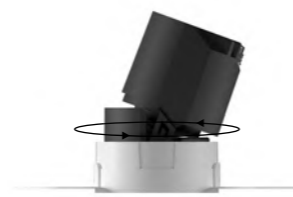


HORIZONTAL ROTATION
355°

VANZ Series Independently designed product appearance, Buckle modular structure, easy installation and maintenance. Free splicing like Russian cubes provides enough illumination for high-rise space, and square boxes provide flexible lighting modes.

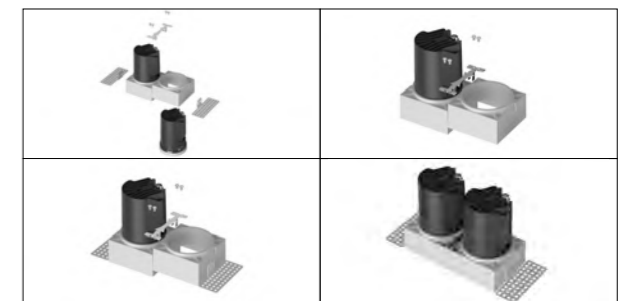





































LAMPYHOTELOWE.PL



DOWN LIGHT (COB)

DOWN LIGHT (COB)

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (DxHmm)
FXA-W323	7W	15°/24°/38°/60°			Ø55	Ø61.6x80
FXA-W323	7W	15°/24°/38°/60°			Ø57.5	Ø61.6x80
FXA-W324	12W	8°/15°/24°/38°/60°			Ø75	Ø84x100.5
FXA-W324	12W	8°/15°/24°/38°/60°			Ø75	Ø72.4x100.5
FXA-W325	20W	15°/24°/38°/60°			Ø95	Ø110x121.5
FXA-W325	20W	15°/24°/38°/60°			Ø95	Ø91.5x121.5


Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXA-W323-1	7W	15°/24°/38°/60°			55x55	63.5x63.5x87.5
FXA-W323-1	7W	15°/24°/38°/60°			57.5x57.5	53.8x53.8x87.5
FXA-W324-1	12W	8°/15°/24°/38°/60°			75x75	84.5x84.5x112
FXA-W324-1	12W	8°/15°/24°/38°/60°			77x77	73.5x73.5x112
FXA-W325-1	20W	15°/24°/38°/60°			95x95	104.5x104.5x137.5
FXA-W325-1	20W	15°/24°/38°/60°			97x97	93.6x93.6x137.5
FXA-C-W323-1	7Wx2	15°/24°/38°/60°			120x60	129.5x68.5x84
FXA-C-W323-1	7Wx2	15°/24°/38°/60°			123x62	115.5x54.5x84
FXA-C-W324-1	12Wx2	8°/15°/24°/38°/60°			164x77	180x90.5x112
FXA-C-W324-1	12Wx2	8°/15°/24°/38°/60°			166.5x79.5	163x73.5x112
FXA-C-W325-1	20Wx2	15°/24°/38°/60°			207x95	223.5x109.5x133.5
FXA-C-W325-1	20Wx2	15°/24°/38°/60°			209x97	207.5x93.5x133.5

OPTIONAL: ○ White ● Black ● Silver ● Golden ● Gun black ● Silver mist







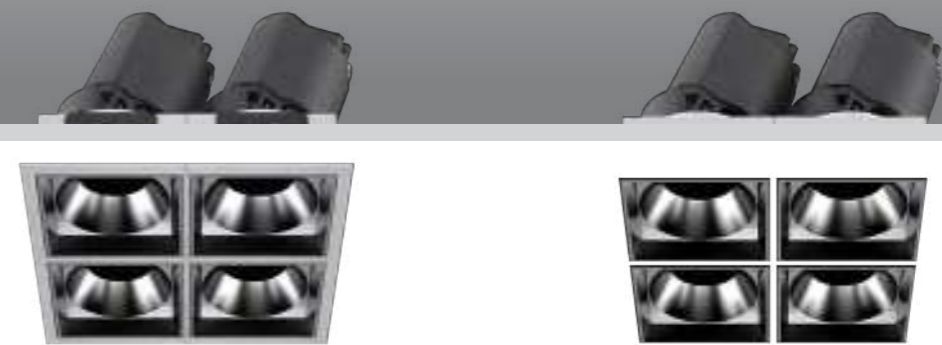

















OPTIONAL: ○ White ● Black ● Silver ● Golden ● Gun black ● Silver mist















DOWN LIGHT
(COB)



DOWN LIGHT
(COB)

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXA-W323-2	7Wx2	15°/24°/38°/60°			108.5x55	117x63.5x87.5
FXA-W323-2	7Wx2	15°/24°/38°/60°			111x57.5	107.6x53.8x87.5
FXA-W324-2	12Wx2	8°/15°/24°/38°/60°			150x75	158x84.5x112
FXA-W324-2	12Wx2	8°/15°/24°/38°/60°			152.5x77	147x73.5x112
FXA-W325-2	20Wx2	15°/24°/38°/60°			190x95	198x104.5x137.5
FXA-W325-2	20Wx2	15°/24°/38°/60°			192.5x97	187x93.6x137.5
FXA-W323-3	7Wx3	15°/24°/38°/60°			163x55	171x63.5x87.5
FXA-W323-3	7Wx3	15°/24°/38°/60°			165.5x57.5	161.5x53.8x87.5
FXA-W324-3	12Wx3	8°/15°/24°/38°/60°			222x75	231.5x84.5x112
FXA-W324-3	12Wx3	8°/15°/24°/38°/60°			224.5x77	220.5x73.5x112
FXA-W325-3	20Wx3	15°/24°/38°/60°			284x95	293.5x104.5x137.5
FXA-W325-3	20Wx3	15°/24°/38°/60°			287x97	281x93.6x137.5

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXA-W323-4	7Wx4	15°/24°/38°/60°			108.5x108.5	117x117x87.5
FXA-W323-4	7Wx4	15°/24°/38°/60°			111x111	107.6x107.6x87.5
FXA-W324-4	12Wx4	8°/15°/24°/38°/60°			150x150	158x158x112
FXA-W324-4	12Wx4	8°/15°/24°/38°/60°			152.5x152.5	147x147x112
FXA-W325-4	20Wx4	15°/24°/38°/60°			190x190	198x198x137.5
FXA-W325-4	20Wx4	15°/24°/38°/60°			192x192	187x187x137.5

OPTIONAL:  White  Black  Silver  Golden  Gun black  Silver mist


OPTIONAL:  White  Black  Silver  Golden  Gun black  Silver mist









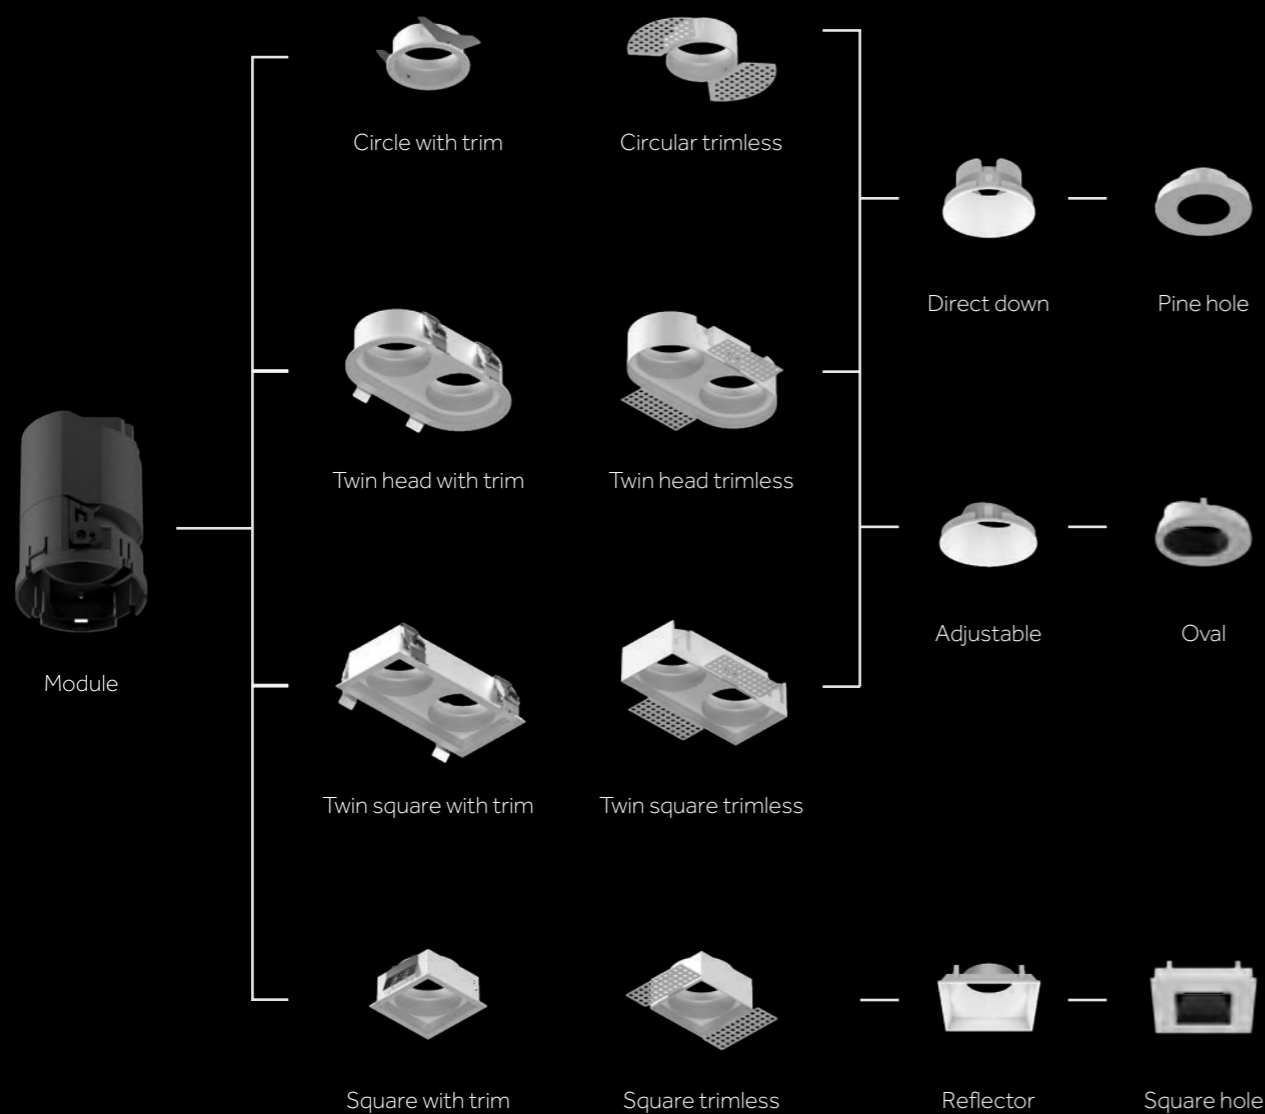



OBALS



DOWN LIGHT (COB)

DOWN LIGHT (COB)



Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXA-W323-1A	7W	15°/24°/38°/60°			55x55	63.5x63.5x87.5
FXA-W323-1A	7W	15°/24°/38°/60°			57.5x57.5	53.8x53.8x87.5
FXA-W324-1A	12W	8°/15°/24°/38°/60°			75x75	84.5x84.5x112
FXA-W324-1A	12W	8°/15°/24°/38°/60°			77x77	73.5x73.5x112
FXA-W325-1A	20W	15°/24°/38°/60°			95x95	104.5x104.5x137.5
FXA-W325-1A	20W	15°/24°/38°/60°			97x97	93.6x93.6x137.5

OPTIONAL: ○ White ● Black ● Silver ● Golden ● Gun black ● Silver mist

Reflector color:



Cut-out-55x55mm:



Cut-out-75x75mm:



























Cut-out-95x95mm:

















DOWN LIGHT (COB)

DOWN LIGHT (COB)

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXA-W323-2A	7Wx2	15°/24°/38°/60°			108.5x55	117.3x63.5x87.5
FXA-W323-2A	7Wx2	15°/24°/38°/60°			111x57.5	107.6x53.8x87.5
FXA-W324-2A	12Wx2	8°/15°/24°/38°/60°			150x75	158x84.5x112
FXA-W324-2A	12Wx2	8°/15°/24°/38°/60°			152.5x77	147x73.5x112
FXA-W325-2A	20Wx2	15°/24°/38°/60°			190x95	198x104.5x137.5
FXA-W325-2A	20Wx2	15°/24°/38°/60°			192.5x97	187x93.6x137.5
FXA-W323-3A	7Wx3	15°/24°/38°/60°			163x55	171x63.5x87.5
FXA-W323-3A	7Wx3	15°/24°/38°/60°			165.5x57.5	161.5x53.8x87.5
FXA-W324-3A	12Wx3	8°/15°/24°/38°/60°			222x75	231.5x84.5x112
FXA-W324-3A	12Wx3	8°/15°/24°/38°/60°			224.5x77	220.5x73.5x112
FXA-W325-3A	20Wx3	15°/24°/38°/60°			284x95	293.5x104.5x137.5
FXA-W325-3A	20Wx3	15°/24°/38°/60°			287x97	281x93.6x137.5


Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXA-W323-4A	7Wx4	15°/24°/38°/60°			108.5x108.5	117.3x117.3x87.5
FXA-W323-4A	7Wx4	15°/24°/38°/60°			111x111	107.6x107.6x87.5
FXA-W324-4A	12Wx4	8°/15°/24°/38°/60°			150x150	158x158x112
FXA-W324-4A	12Wx4	8°/15°/24°/38°/60°			152.5x152.5	147x147x112
FXA-W325-4A	20Wx4	15°/24°/38°/60°			190x190	198x198x137.5
FXA-W325-4A	20Wx4	15°/24°/38°/60°			192x192	187.2x187.2x137.5

OPTIONAL: ○ White ● Black ● Silver ● Golden ● Gun black ● Silver mist

OPTIONAL: ○ White ● Black ● Silver ● Golden ● Gun black ● Silver mist




DOWN LIGHT
(COB)

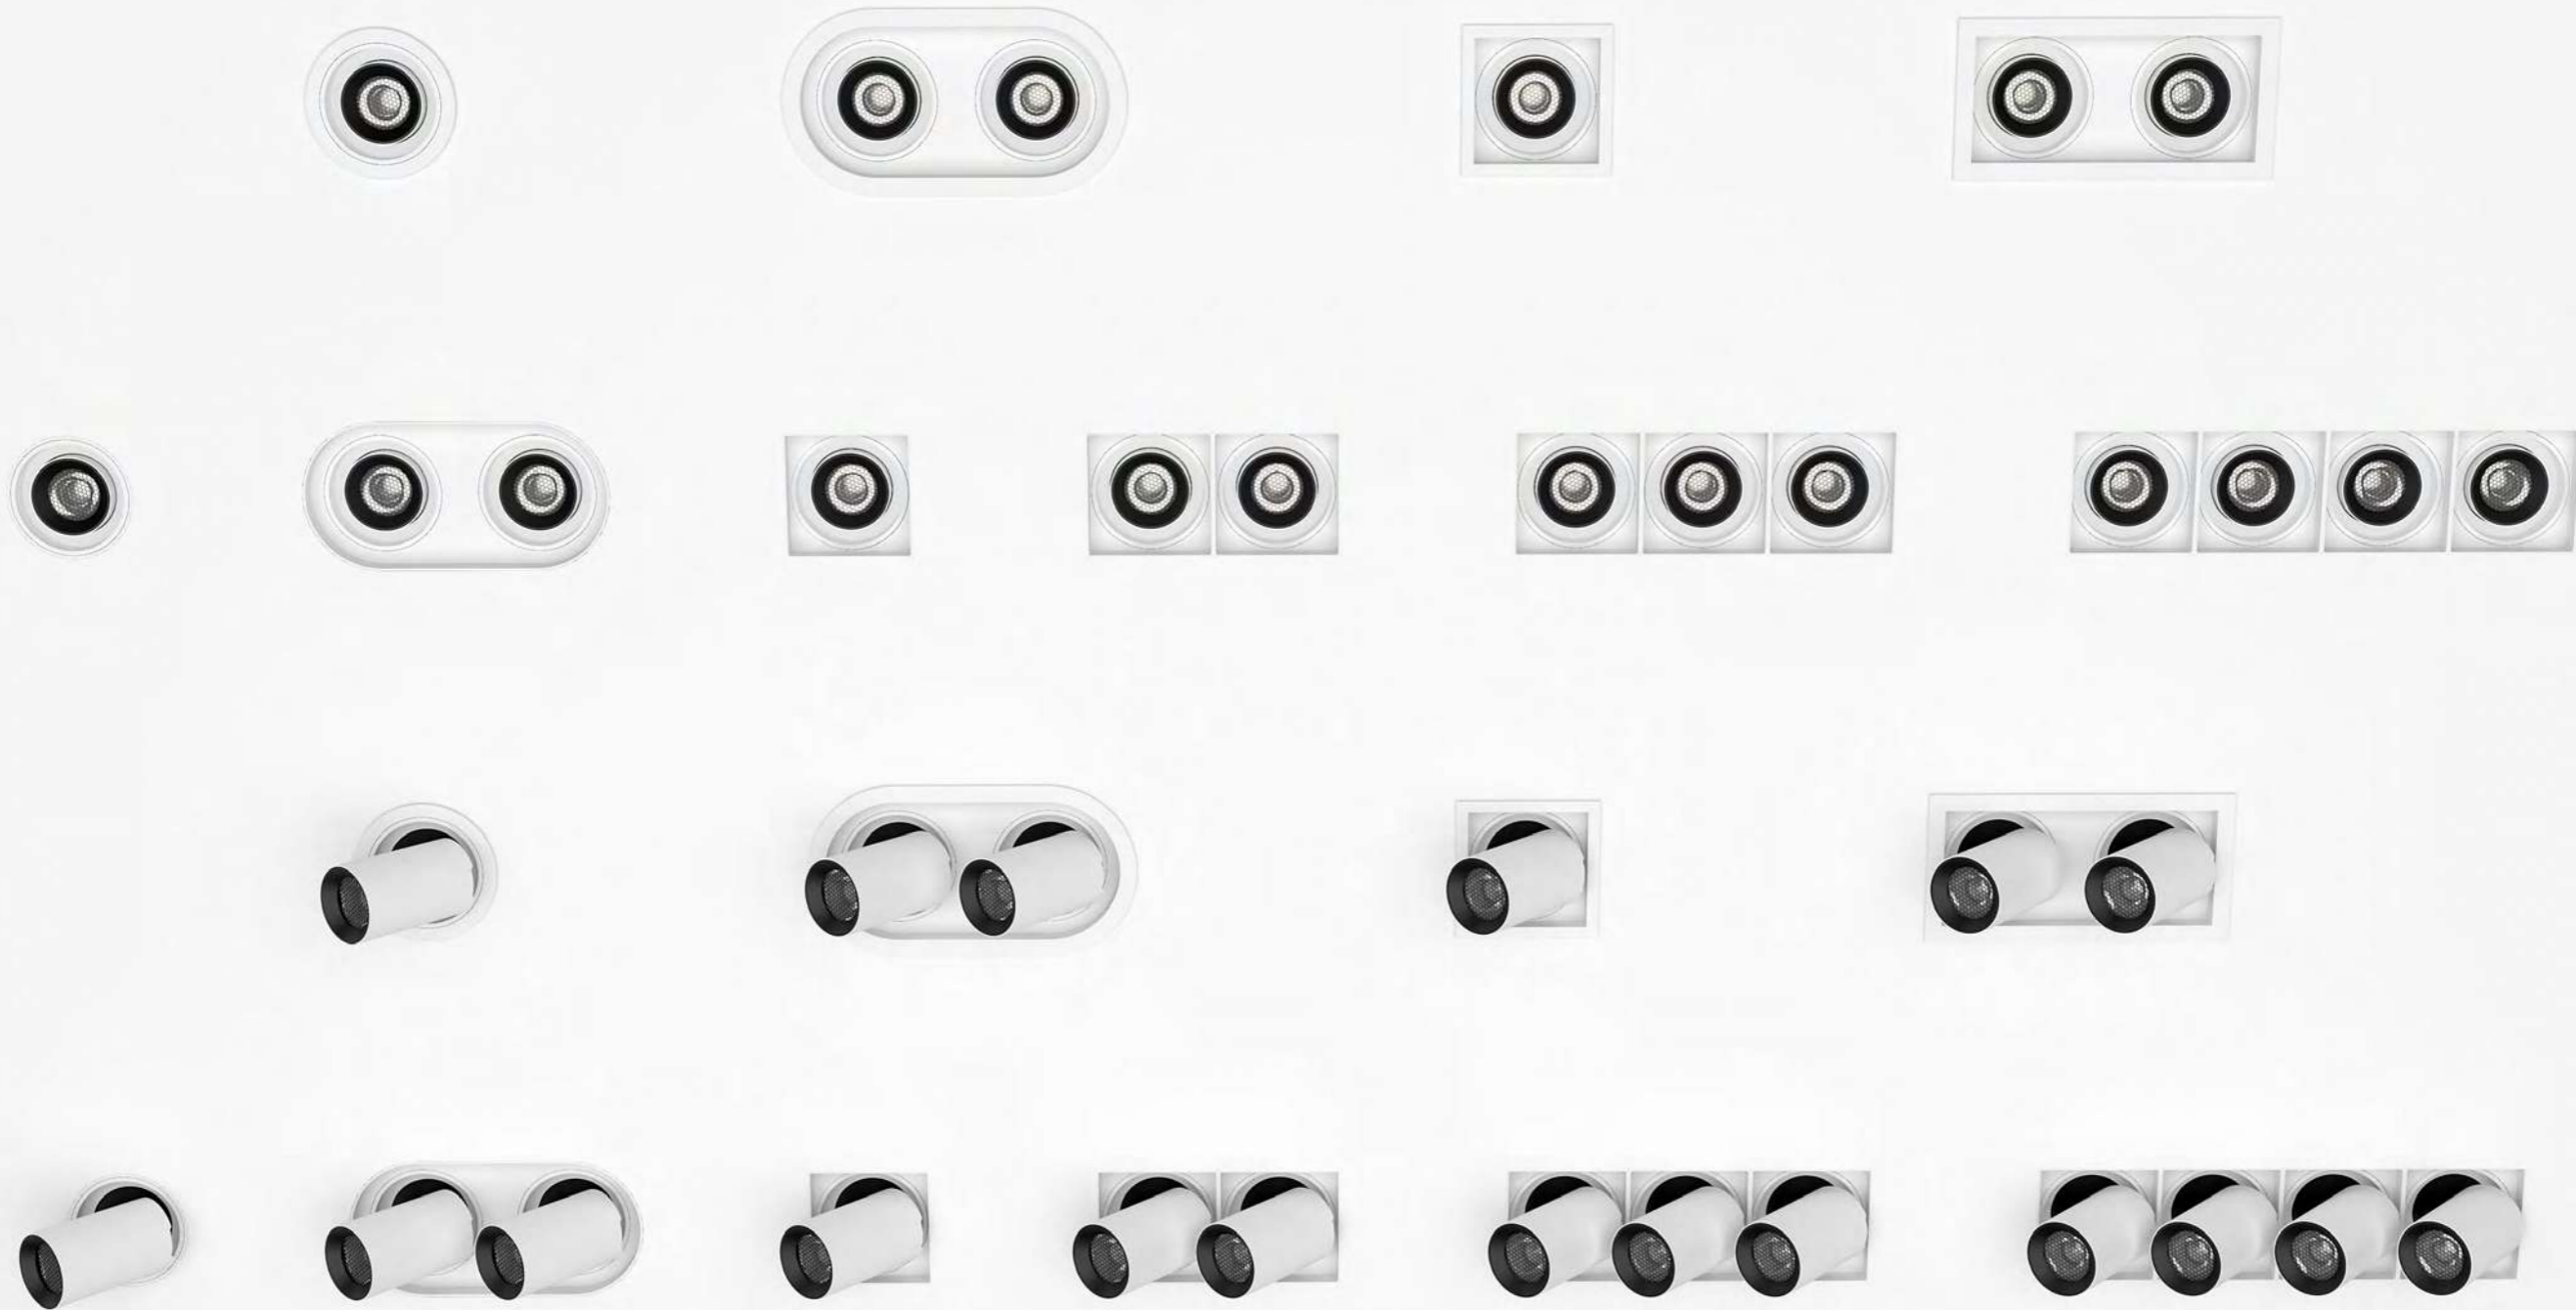


DOWN LIGHT
(COB)

STARS B

LED Downlight

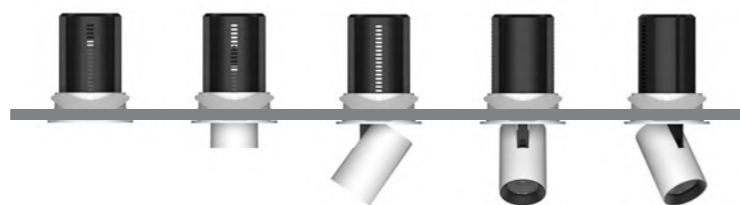

VANIE Series Free splicing approach, flexible configuration according to personalized or architectural request.

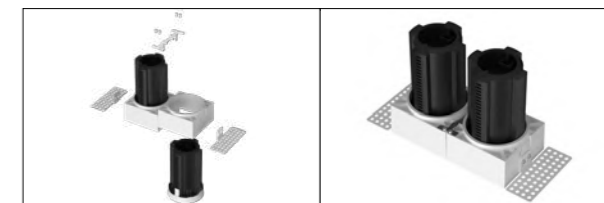





































LAMPYHOTELOWE.PL



DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

























Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (DxHmm)
FXB-V323	7W	10°/15°/24°/38°/60°			Ø55	Ø61.6x86
FXB-V323	7W	10°/15°/24°/38°/60°			Ø57.5	Ø53x86
FXB-V324	12W	10°/15°/24°/38°/60°			Ø75	Ø84x104
FXB-V324	12W	10°/15°/24°/38°/60°			Ø77	Ø72.5x104
FXB-V325	20W	10°/15°/24°/38°/60°			Ø95	Ø110x127
FXB-V325	20W	10°/15°/24°/38°/60°			Ø97	Ø91.5x127













Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXB-V323-1	7W	10°/15°/24°/38°/60°			55x55	63.5x63.5x94
FXB-V323-1	7W	10°/15°/24°/38°/60°			57.5x57.5	53.8x53.8x94
FXB-V324-1	12W	10°/15°/24°/38°/60°			75x75	84.5x84.5x116
FXB-V324-1	12W	10°/15°/24°/38°/60°			77x77	73.5x73.5x116
FXB-V325-1	20W	10°/15°/24°/38°/60°			95x95	93.6x93.6x144
FXB-V325-1	20W	10°/15°/24°/38°/60°			97x97	93.6x93.6x144
FXB-C-V323-1	7Wx2	10°/15°/24°/38°/60°			120x60	129.5x68.5x91
FXB-C-V323-1	7Wx2	10°/15°/24°/38°/60°			120x62	115.5x54.5x91
FXB-C-V324-1	12Wx2	10°/15°/24°/38°/60°			164x77	180x90.5x116
FXB-C-V324-1	12Wx2	10°/15°/24°/38°/60°			166.5x79.5	163x73.5x116
FXB-C-V325-1	20Wx2	10°/15°/24°/38°/60°			207x95	223.5x109.5x140
FXB-C-V325-1	20Wx2	10°/15°/24°/38°/60°			209x97	207.5x93.5x140




DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXB-V323-2	7Wx2	10°/15°/24°/38°/60°			108.5x55	117.5x63.5x94
FXB-V323-2	7Wx2	10°/15°/24°/38°/60°			111x57.5	108x54x94
FXB-V324-2	12Wx2	10°/15°/24°/38°/60°			150x75	158x84.5x116
FXB-V324-2	12Wx2	10°/15°/24°/38°/60°			152.5x77	147x73.5x116
FXB-V325-2	20Wx2	10°/15°/24°/38°/60°			190x95	198x104.5x144
FXB-V325-2	20Wx2	10°/15°/24°/38°/60°			192.5x97	187x93.5x144
FXB-V323-3	7Wx3	10°/15°/24°/38°/60°			163x55	171x63.5x94
FXB-V323-3	7Wx3	10°/15°/24°/38°/60°			165.5x57.5	161.5x54x94
FXB-V324-3	12Wx3	10°/15°/24°/38°/60°			222x75	231.5x84.5x116
FXB-V324-3	12Wx3	10°/15°/24°/38°/60°			224.5x77	220.5x73.5x116
FXB-V325-3	20Wx3	10°/15°/24°/38°/60°			284x95	293.5x104.5x144
FXB-V325-3	20Wx3	10°/15°/24°/38°/60°			287x97	281x94x144

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXB-V323-4	7Wx4	10°/15°/24°/38°/60°			108.5x108.5	117.5x117.5x94
FXB-V323-4	7Wx4	10°/15°/24°/38°/60°			111x111	107.6x107.6x94
FXB-V324-4	12Wx4	10°/15°/24°/38°/60°			150x150	158x158x116
FXB-V324-4	12Wx4	10°/15°/24°/38°/60°			152.5x152.5	147x147x116
FXB-V325-4	20Wx4	10°/15°/24°/38°/60°			190x190	198x198x144
FXB-V325-4	20Wx4	10°/15°/24°/38°/60°			192x192	187x187x144


DOWN LIGHT
(COB)

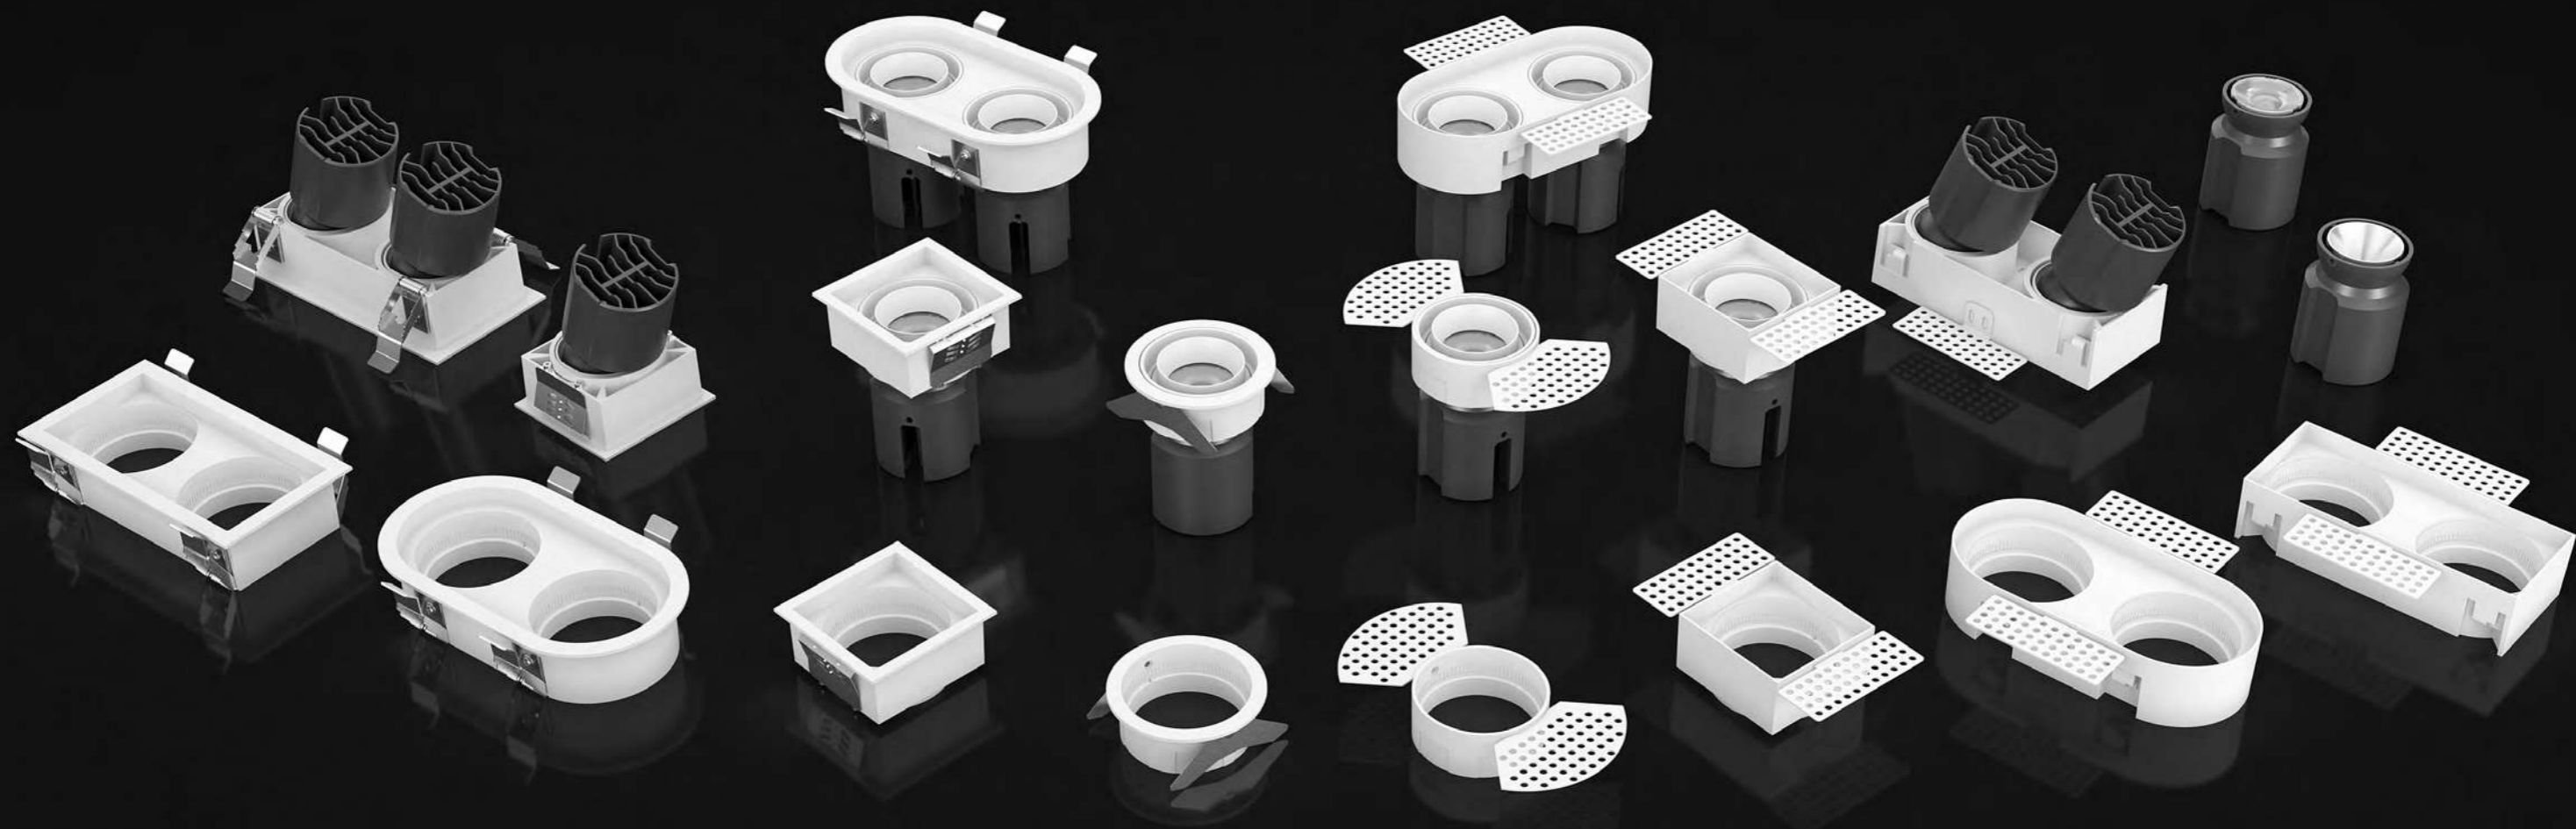


DOWN LIGHT
(COB)

STARS C

LED Downlight




ADJUSTABLE
30°


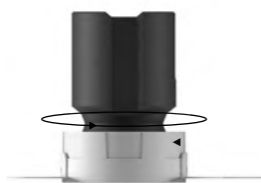


HORIZONTAL ROTATION
355°

VANEL Series Free splicing approach, flexible configuration according to personalized or architectural request.

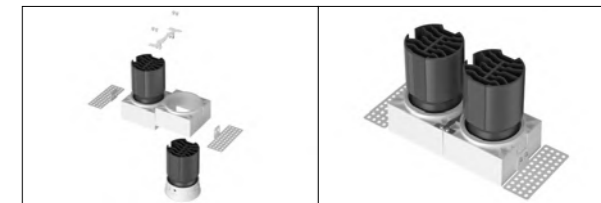





































LAMPYHOTELOWE.PL




DOWN LIGHT
(COB)

DOWN LIGHT
(COB)





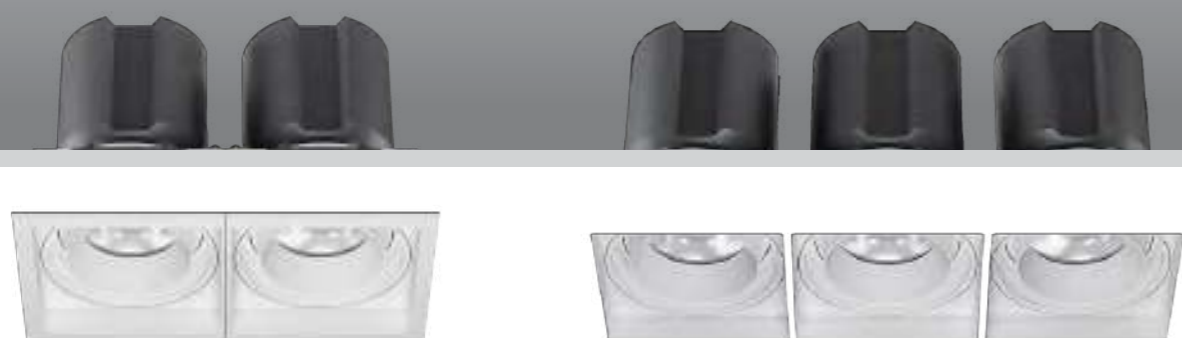



















Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (DxHmm)
FXC-S323	7W	10°/15°/24°/38°/60°			Ø55	Ø61.6x80
FXC-S323	7W	10°/15°/24°/38°/60°			Ø57.5	Ø53x85
FXC-S324	20W	10°/15°/24°/38°/60°			Ø75	Ø84x100
FXC-S324	20W	10°/15°/24°/38°/60°			Ø77	Ø72.5x100
FXC-S325	35W	10°/15°/24°/38°/60°			Ø95	Ø110x128
FXC-S325	35W	10°/15°/24°/38°/60°			Ø97	Ø91.5x128













Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXC-S323-1	7W	10°/15°/24°/38°/60°			55x55	63.5x63.5x88
FXC-S323-1	7W	10°/15°/24°/38°/60°			57.5x57.5	53.8x53.8x94
FXC-S324-1	20W	10°/15°/24°/38°/60°			75x75	84.5x84.5x112
FXC-S324-1	20W	10°/15°/24°/38°/60°			77x77	73.5x73.5x112
FXC-S325-1	35W	10°/15°/24°/38°/60°			95x95	104.5x104.5x144
FXC-S325-1	35W	10°/15°/24°/38°/60°			97x97	93.6x93.6x144
FXC-C-S323-1	7Wx2	10°/15°/24°/38°/60°			120x60	129.5x68.5x85
FXC-C-S323-1	7Wx2	10°/15°/24°/38°/60°			120x62	115.5x54.5x85
FXC-C-S324-1	20Wx2	10°/15°/24°/38°/60°			164x77	180x90.5x112
FXC-C-S324-1	20Wx2	10°/15°/24°/38°/60°			166.5x79.5	163x73.5x112
FXC-C-S325-1	35Wx2	10°/15°/24°/38°/60°			207x95	223.5x109.5x139
FXC-C-S325-1	35Wx2	10°/15°/24°/38°/60°			209x97	207.5x93.5x139



DOWN LIGHT
(COB)

DOWN LIGHT
(COB)

Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXC-S323-2	7Wx2	10°/15°/24°/38°/60°			108.5x55	117.5x63.5x88
FXC-S323-2	7Wx2	10°/15°/24°/38°/60°			111x57.5	107.6x53.8x88
FXC-S324-2	20Wx2	10°/15°/24°/38°/60°			150x75	158x84.5x112
FXC-S324-2	20Wx2	10°/15°/24°/38°/60°			152.5x77	147x73.5x112
FXC-S325-2	35Wx2	10°/15°/24°/38°/60°			190x95	198x104.5x143
FXC-S325-2	35Wx2	10°/15°/24°/38°/60°			192.5x97	187x93.6x143
FXC-S323-3	7Wx3	10°/15°/24°/38°/60°			163x55	171x63.5x88
FXC-S323-3	7Wx3	10°/15°/24°/38°/60°			165.5x57.5	161.5x53.8x88
FXC-S324-3	20Wx3	10°/15°/24°/38°/60°			222x75	231.5x84.5x112
FXC-S324-3	20Wx3	10°/15°/24°/38°/60°			224.5x77	220.5x73.5x112
FXC-S325-3	35Wx3	10°/15°/24°/38°/60°			284x95	293.5x104.5x143
FXC-S325-3	35Wx3	10°/15°/24°/38°/60°			287x97	281x93.6x143


Model	Wattage	Beam Angle	Ring	Whole Lamp	Cut-out (mm)	Size (WxLxHmm)
FXC-S323-4	7Wx4	10°/15°/24°/38°/60°			108.5x108.5	117.5x117.5x88
FXC-S323-4	7Wx4	10°/15°/24°/38°/60°			111x111	107.6x107.6x88
FXC-S324-4	20Wx4	10°/15°/24°/38°/60°			150x150	158x158x112
FXC-S324-4	20Wx4	10°/15°/24°/38°/60°			152.5x152.5	147x147x112
FXC-S325-4	35Wx4	10°/15°/24°/38°/60°			190x190	198x198x143
FXC-S325-4	35Wx4	10°/15°/24°/38°/60°			192x192	187x187x143



	DOB-EX120R-S	DOB-EX175R-S	DOB-EX225R-S	DOB-EX300R-S
Type	Fixed	Fixed	Fixed	Fixed
Wattage	6W	12W	18W	24W
Beam Angle	120°	120°	120°	120°
Lumen (lm)	483	1104	1863	2208
Cut-out (mm) ⓘ	/	/	/	/
Size (DxHmm)	Ø123x35	Ø174x35	Ø226x35	Ø289x38
N.W/PC (kgs)	0.097	0.18	0.274	0.424
Q'ty/CTN (pcs)	90	30	30	20

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Black

CCT: 3000K 6000K

DIMMING: Triac

DOB Series Compare with traditional edge panel light, DOB panel light adopt the backlit design makes the diffuser plate is not yellowing. The high CRI is greater than 80 makes everything close to real. It is very easy to assemble by the simple structure which the Led chip and driver integrated design. Moreover, there are round and square frames for optional.

Dimension(mm)

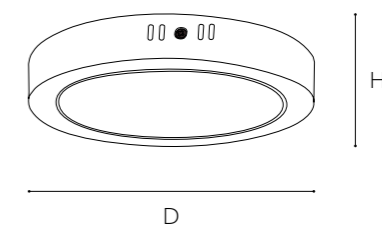




	DOB-EX120S-S	DOB-EX175S-S	DOB-EX225S-S	DOB-EX300S-S
Type	Fixed	Fixed	Fixed	Fixed
Wattage	6W	12W	18W	24W
Beam Angle	120°	120°	120°	120°
Lumen (lm)	483	1104	1863	2208
Cut-out (mm) ⓘ	/	/	/	/
Size (WxLxHmm)	122x122x35	173x173x35	226x226x35	289x289x38
N.W/PC (kgs)	0.132	0.22	0.351	0.55
Q'ty/CTN (pcs)	90	30	30	20

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Black

CCT: 3000K 6000K

DIMMING: Triac

DOB Series Compare with traditional edge panel light, DOB panel light adopt the backlit design makes the diffuser plate is not yellowing. The high CRI is greater than 80 makes everything close to real. It is very easy to assemble by the simple structure which the Led chip and driver integrated design. Moreover, there are round and square frames for optional.

Dimension(mm)

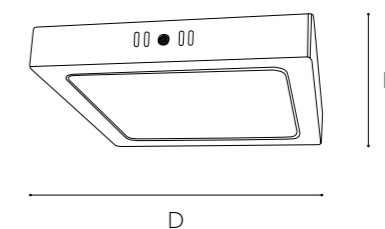




	XF-EX04CD-S	XF-EX05CD-S	XF-EX06CD-S	XF-EX08CD-S
Type	Fixed	Fixed	Fixed	Fixed
Wattage	10W	15W	20W	30W
Beam Angle	100°	100°	100°	100°
Lumen (lm)	1200	1800	2450	3795
Cut-out (mm) ⓘ	/	/	/	/
Size (DxHmm)	Ø114x70	Ø149x70	Ø169x70	Ø199x80
N.W/PC (kgs)	0.6	0.85	1	1.44
Q'ty/CTN (pcs)	24	20	16	12

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Black

CCT: 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

XF family products design with various installation options of surface-mounted, recessed, pendant. DC connector design, which can easy to change for different installation style, like downlight, surface mounted downlight, grill light and pendent light. Simple design and easy to install.

Dimension(mm)



Ø114



Ø149



Ø169



Ø199






	ZY-EX03D-C	ZY-EX04D-C	ZY-EX05D-C
Type	Fixed	Fixed	Fixed
Wattage	15W	25W	35W
Beam Angle	15°/24°/38°/60°	15°/24°/38°/60°	15°/24°/38°/60°
Lumen (lm)	1668	2760	3772
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø90x103	Ø110x115	Ø130x115
N.W/PC (kgs)	0.46	0.72	0.9
Q'ty/CTN (pcs)	32	24	18

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)






FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

ZY Series Superior heat emission structure with patented technology and power supply configuration, the light can work efficiently and safety. Optimized light distribution design solution can make the optical property more excellent.

Dimension(mm)






	OBS-JG-EX02M-C	OBS-JG-EX03M-C	OBS-JG-EX04M-C
Type	Fixed	Fixed	Fixed
Wattage	10W	20W	30W
Beam Angle	12°/24°/38°/55°	12°/24°/38°/55°	12°/24°/38°/55°
Lumen (lm)	805	1610	2415
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	Ø75x90	Ø91x112	Ø128x137
N.W/PC (kgs)	0.33	0.51	0.98
Q'ty/CTN (pcs)	50	30	20

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Black **CCT:** 3000K 6000K


OPTIONAL: Bright white Bright black Black light Bright silver Silver mist


DIMMING: No dim Triac 1-10V DALI Smart lighting

KING KONG Series UGR<19 Surface Mounted Downlight, black and white optional. Use metal ceiling plate, die-cast lamp body radiator. Anti-glare cover, which can add honeycomb to make UGR < 12, the snap-back cover is easy to install and remove. Exquisite form and reasonable proportion.

Dimension(mm)

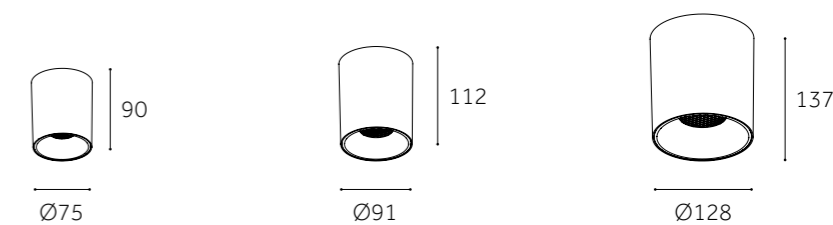


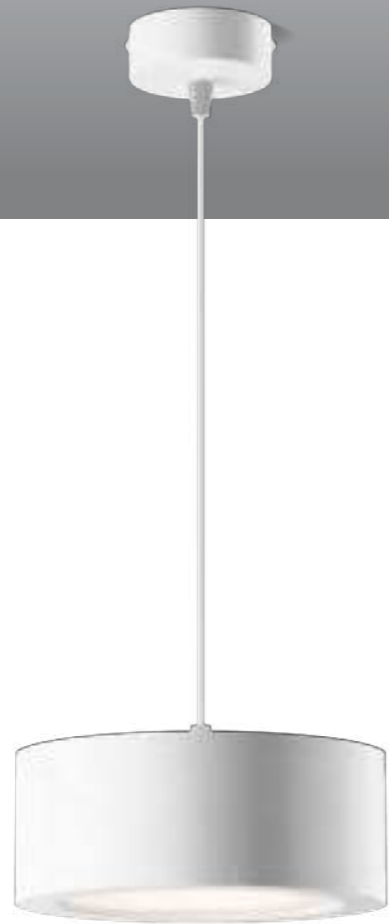

	XF-SL04CD-S	XF-SL05CD-S	XF-SL06CD-S	XF-SL08CD-S
Type	Fixed	Fixed	Fixed	Fixed
Wattage	10W	15W	20W	30W
Beam Angle	100°	100°	100°	100°
Lumen (lm)	1380	2070	2760	3795
Cut-out (mm) 	/	/	/	/
Size (DxLxHmm)	Ø114x70x1000	Ø149x70x1000	Ø169x70x1000	Ø199x80x1000
N.W/PC (kgs)	0.69	0.96	1.1	1.4
Q'ty/CTN (pcs)	18	12	12	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Black **CCT:** 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

XF family products design with various installation options of surface-mounted, recessed, pendant. DC connector design, which can easy to change for different installation style, like downlight, surface mounted downlight, grill light and pendent light. Simple design and easy to install.

Dimension(mm)

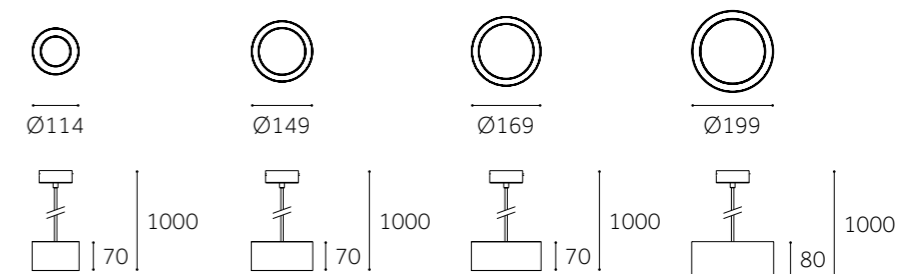




	NS-SL1313M-S	NS-SL1313M-C
Type	Fixed	Fixed
Wattage	10W/15W/20W/25W	10W/15W/20W/25W
Beam Angle	95°	15°/25°/40°
Lumen (lm)	1145/1760/2399/2990	1116/1710/2332/2841
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø130x(610-1110)	Ø130x(610-1110)
N.W/PC (kgs)	1.17	1.17
Q'ty/CTN (pcs)	12	12

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)





FINISH: ○ White ● Silver ● Black

CCT: 3000K  6000K


DIMMING: Non-Dimmable

ARTEMIS Series products design with various installation options of surface-mounted, recessed, track and pendant. It provides excellent lighting effect for commercial space such as supermarkets and shops. 15°,25°,40° beam angle for COB version, 95° beam angle for SMD version.

Dimension(mm)

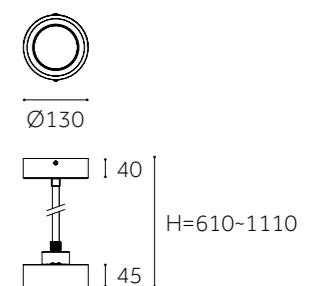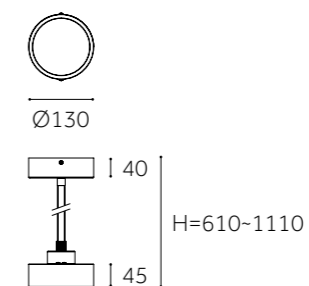




	MN-SL63M-C	MN-SL75M-C
Type	Fixed	Fixed
Wattage	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°
Lumen (lm)	1710	2737
Cut-out (mm) 	/	/
Size (DxLxHmm)	Ø63x145x1000	Ø75x165x1000
N.W/PC (kgs)	0.65	0.95
Q'ty/CTN (pcs)	27	18

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)





FINISH: White Silver Black **CCT:** 3000K 6000K

OPTIONAL: White Black Golden Silver


DIMMING: Triac

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels, restaurants and other public buildings.

Dimension(mm)

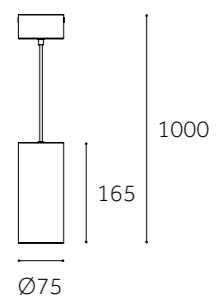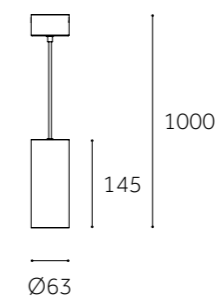




	ZY-SL03D-C	ZY-SL04D-C	ZY-SL05D-C
Type	Fixed	Fixed	Fixed
Wattage	15W	25W	35W
Beam Angle	15°/24°/38°/60°	15°/24°/38°/60°	24°/38°/60°
Lumen (lm)	1582	2649	3720
Cut-out (mm) 	/	/	/
Size (DxLxHmm)	Ø90x103x1200	Ø110x115x1200	Ø130x115x1200
N.W/PC (kgs)	0.56	0.82	0.96
Q'ty/CTN (pcs)	18	12	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

ZY Series Superior heat emission structure with patented technology and power supply configuration, the light can work efficiently and safety. Optimized light distribution design solution can make the optical property more excellent.

Dimension(mm)

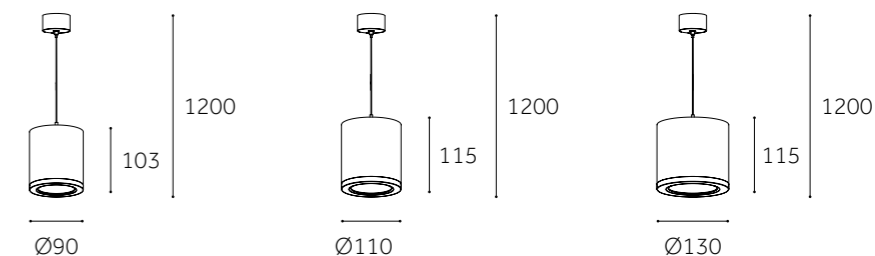




	MN-EX55M-C	MN-EX63M-C	MN-EX75M-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	9W	18W	30W
Beam Angle	23°/38°/45°	23°/38°/45°	23°/38°/45°
Lumen (lm)	849	1710	2737
Cut-out (mm) ⓘ	/	/	/
Size (DxLmm)	Ø55x110	Ø63x145	Ø75x165
N.W/PC (kgs)	0.35	0.59	0.82
Q'ty/CTN (pcs)	40	25	20

DOWN LIGHT
(Surface&Pendant)


DOWN LIGHT
(Surface&Pendant)



- FINISH:** White Silver Black **CCT:** 3000K 3000K 6000K
- OPTIONAL:** White Black Golden Silver
- DIMMING:** Triac

MINI family products design with various installation options of surface-mounted, recessed, pendant and track. Simple design, it can be widely used in different kind of application areas for the shopping malls, hotels, restaurants and other public buildings.

Dimension(mm)

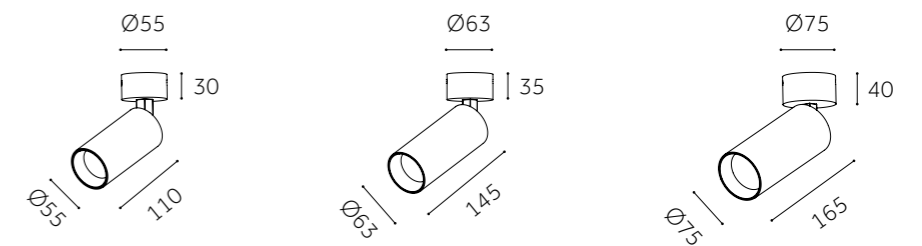


BJ-EX60-C

Type	Adjustable 90°
Wattage	10W/15W/20W
Beam Angle	15°-70°
Lumen (lm)	1000/1500/2100
Cut-out (mm) ⓘ	/
Size (DxHmm)	Ø60x318.5
N.W/PC (kgs)	0.8
Q'ty/CTN (pcs)	18



DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Silver Black

CCT: 3000K 6000K

DIMMING: Non-Dimmable

EAGLE EYE Series with high efficiency brand COB LED chip, built-in driver. Aluminum die-casting body and heat sink which is better air dissipation. Adjustable beam angle from 15°-70°.

Dimension(mm)

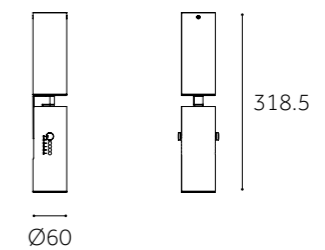




	NS-EX05M-S	NS-EX05M-C
Type	Adjustable 60°+350°	Adjustable 60°+350°
Wattage	10W/15W/20W/25W	10W/15W/20W/25W
Beam Angle	95°	15°/25°/40°
Lumen (lm)	1145/1760/2399/2990	1116/1710/2332/2841
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø130x105	Ø130x105
N.W/PC (kgs)	1.46	1.46
Q'ty/CTN (pcs)	8	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: ○ White ● Silver ● Black

CCT: 3000K  6000K


DIMMING: Non-Dimmable

ARTEMIS Series products design with various installation options of surface-mounted, recessed, track and pendant. It provides excellent lighting effect for commercial space such as supermarkets and shops. 350 degree rotatable, 60 degree adjustable, the lamp head can be stretched to meet the adjustment of the different area. Button locked the angle, safe and convenient. 15°,25°,40° beam angle for COB version, 95° beam angle for SMD version.

Dimension(mm)






DZJ-SUR2011M-S	
Type	Adjustable 140°+350°
Wattage	20W/28W/38W/48W
Beam Angle	95°
Lumen (lm)	2760/3864/5244/6624
Cut-out (mm) 	/
Size (WxLxHmm)	204x100x225
N.W/PC (kgs)	1.5
Q'ty/CTN (pcs)	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White+Black Black

CCT: 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

DZJ Series with the large adjustable angle 140° of lighting direction, the downlight meets different light requirements of most users. The high efficiency of this downlight reaches 110lm/w, is used by Samsung SMD chip, and the CRI is greater than 80.

Dimension(mm)

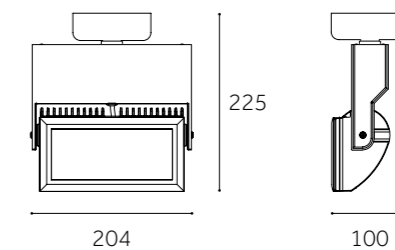




JL-EX04TM-C&D	
Type	Adjustable 90°+355°
Wattage	9W/12W/14W/21W
Beam Angle	16°/24°/50°
Lumen (lm)	950/1250/1500/2150
Cut-out (mm) ⓘ	/
Size (DxHmm)	Ø130x188
N.W/PC (kgs)	1.48
Q'ty/CTN (pcs)	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Silver Black


CCT: 3000K 6000K

DIMMING: Non-Dimmable

GALAXY Series Optional Downlight design, fixed, adjustable, deep recessed (low UGR). Luminaire color can be black, white and silver for optional. Durable die-casting aluminum body with good heat sink. High efficiency COB chip. Multi-reflectors for your optional.

Dimension(mm)

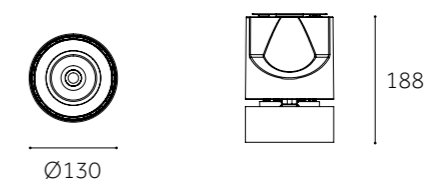

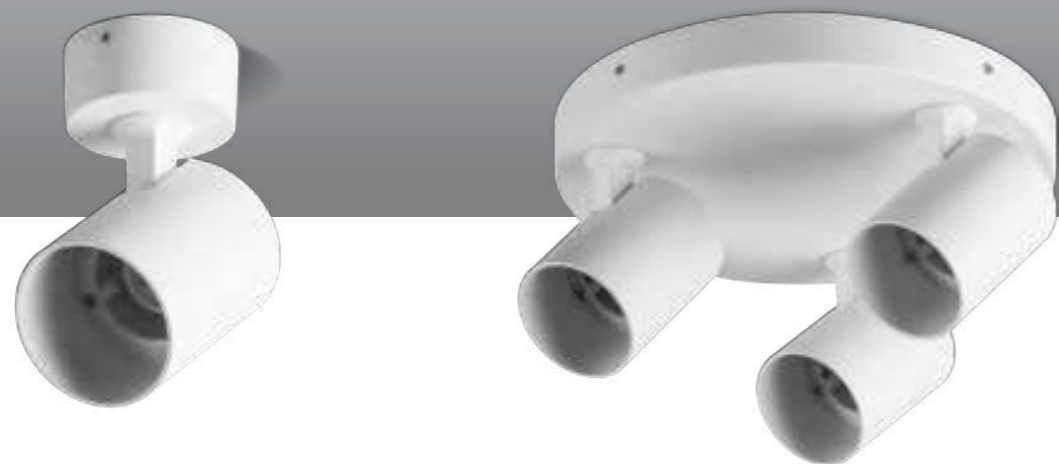


	OBS-TRR-01	OBS-TRR-03
Type	Adjustable 90°+350°	Adjustable 90°+350°
Wattage	/	/
Beam Angle	/	/
Lumen (lm)	/	/
Cut-out (mm) ⓘ	/	/
Size (DxLmm)	Ø84x84	Ø60x78.5
N.W/PC (kgs)	0.21	0.85
Q'ty/CTN (pcs)	50	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)

Easy Installation:



Using the sucker to put GU10 LED bulb into the housing easily



FINISH: ○ White ● Black

GU10 Series easy to rotate the angle 350° and tilting 90°, which can meet your needs at various angles. Decoration is no longer limited. Changeable GU10 light source.

Dimension(mm)

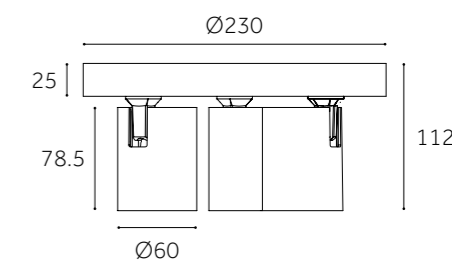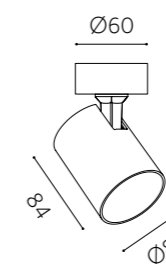



	OBS-TRS-01	OBS-TRS-02	OBS-TRS-03
Type	Adjustable 90°+350°	Adjustable 90°+350°	Adjustable 90°+350°
Wattage	/	/	/
Beam Angle	/	/	/
Lumen (lm)	/	/	/
Cut-out (mm) ⓘ	/	/	/
Size (DxLmm)	Ø84x84	Ø84x84	Ø84x84
N.W/PC (kgs)	0.23	0.5	0.81
Q'ty/CTN (pcs)	50	12	8

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)


Easy Installation:

Using the sucker to put GU10 LED bulb into the housing easily




FINISH: ○ White ● Black


GU10 Series easy to rotate the angle 350° and tilting 90°, which can meet your needs at various angles. Decoration is no longer limited. Changeable GU10 light source.



Dimension(mm)

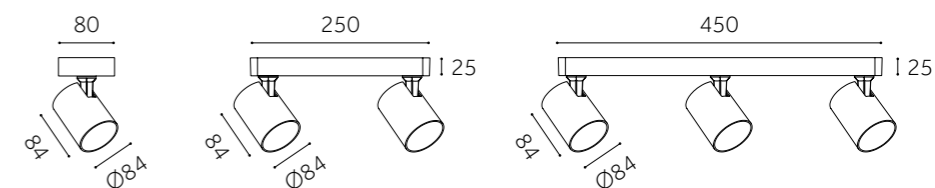




	YHC-WL2501M-B	YHC-WL2501B	YHC-WL3001M-B	YHC-WL3001B	YHC-WL4001B
Type	Fixed	Fixed	Fixed	Fixed	Fixed
Wattage	10W	15W	15W	20W	30W
Beam Angle	20°/40°	20°/40°	20°/40°	20°/40°	20°/40°
Cut-out (mm) 	/	/	/	/	/
Size (DxHmm)	Ø75x100	Ø75x152	Ø95x100	Ø95x152	Ø115x152

DOWN LIGHT
(Surface&Pendant)

DOWN LIGHT
(Surface&Pendant)




FINISH: White Black

CCT: 3000K 6000K

DIMMING: No dim Triac 1-10V DALI Smart lighting

FIREFLY Series Superior heat emission structure with patented technology and power supply configuration, the light can work efficiently and safety. Optimized light distribution design solution can make the optical property more excellent.

Dimension(mm)

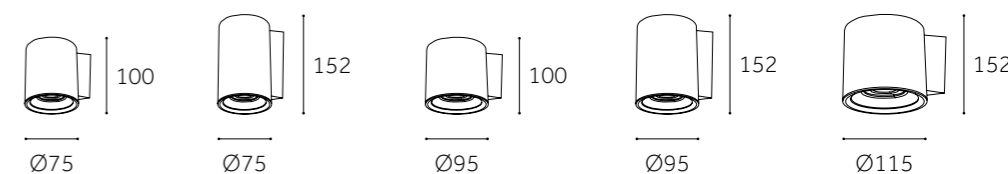



Prismatic Material


Standard



	PL-SP0603M	PL-SP0606M	PL-SP1203M	PL-SP1206M
Type	Fixed	Fixed	Fixed	Fixed
Wattage	18W	36W/48W	25W/36W/48W	45W/72W
Beam Angle	120°	120°	120°	120°
Lumen (lm)	1980	4320/5760	3000/4320/5760	5400/8640
Cut-out (mm)	/	/	/	/
Size (WxLxHmm)	595x295x34	595x595x34	295x1195x34	595x1195x34
N.W/PC (kgs)	1.6	1.6	1.8	3.4
Q'ty/CTN (pcs)	6	6	6	6

PANEL LIGHT

PANEL LIGHT




FINISH: White

CCT: 3000K 6000K


DIMMING: Triac 1-10V DALI Smart lighting

Panel Series LED Backlit Panel light, with PS diffuser, high transmittance, UGR<19. No LGP, No yellowing, 1-CCT and 3-CCT for your options.


Dimension(mm)

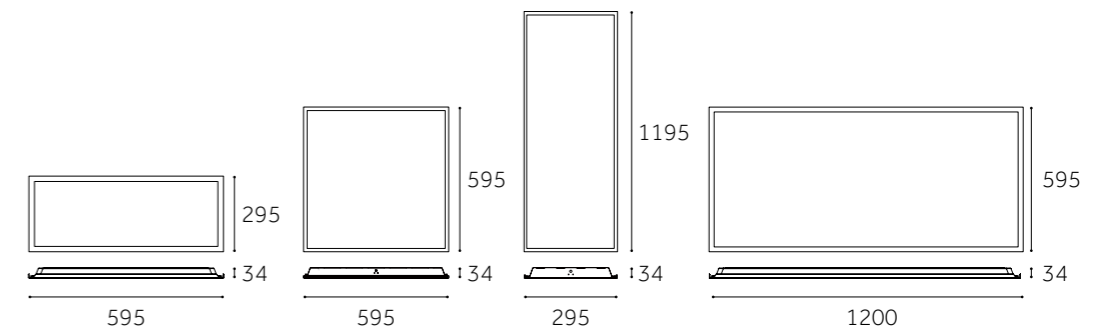

PANEL Accessory

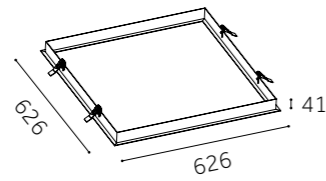


OB-PD6060-V0

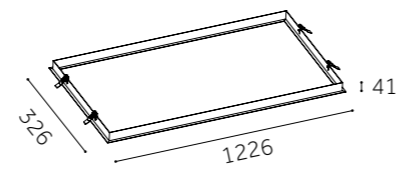

OB-PD1230-V0



Type		
Size (WxLxHmm)	626x626x41	326x1226x41
Cut-out (mm)	614x614	314x1214
Used for Panel Light (European standard)	595x595	295x1195
Package size	670x475x680	1270x475x380
Q'ty/CTN (pcs)	10	10
Component	Spring clip(4pcs) +Screw with nut(4pcs)	Spring clip(4pcs) +Screw with nut(4pcs)

Specification: Recessed Mounting Bracket for Panel Light

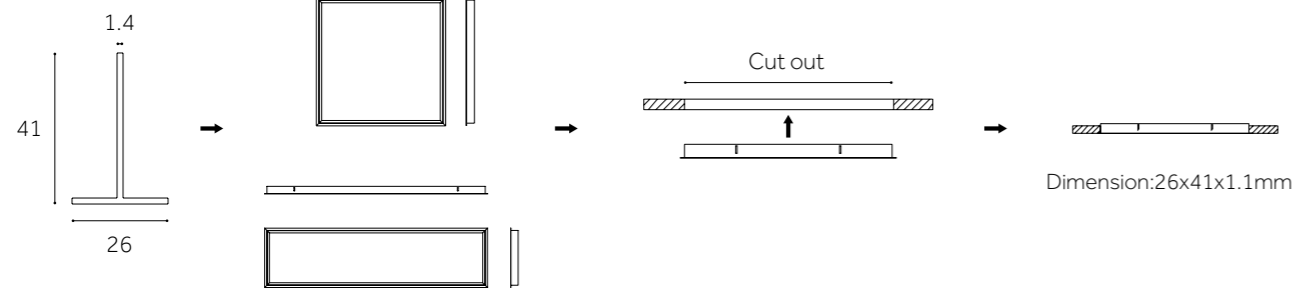

	1200x300	600x300	1200x600	600x600
Splicing Frame				
Size (WxLxHmm)	1203x302x70	603x302x70	1203x602x70	603x602x70
For Panel Light(mm)	1195x295	595x295	1195x595	595x595
Connected Frame				
Size (WxLxHmm)	1260x302x70	660x602x70	1260x602x70	660x602x70
For Panel Light(mm)	1195x295	595x295	1195x595	595x595

Notes: The height of Panel light for using this product shall not over 33mm, and the total height after adding Driver shall not over 65mm.

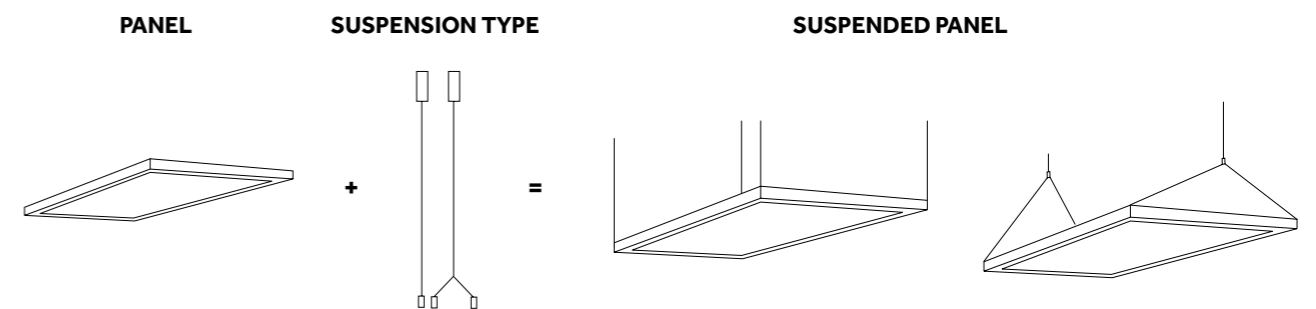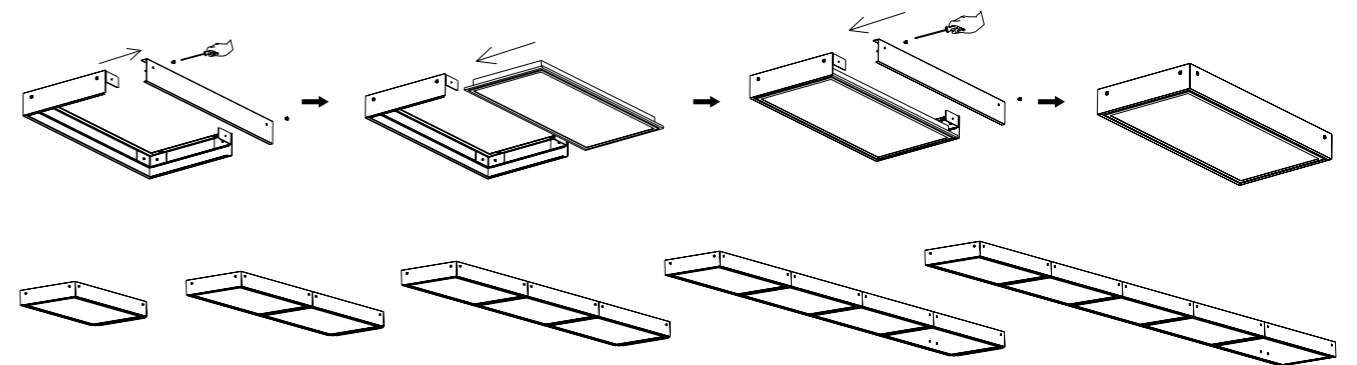

LINEAR LIGHT

LINEAR LIGHT

Grille light(UGR<10)

beam angle:15°/30°/45°

PC cover

beam angle:100°


LED LINEAR LIGHT



LED LINEAR LIGHT


PENDANT 



	LINE-A-SL1204-S	LINE-B-SL1204-S
Type	Fixed	Fixed
Wattage	30W/40W/60W	30W/40W/60W
Beam Angle	15°/30°/45°	15°+100°/30°+100°/45°+100°
Lumen (lm)	2933/3910/5865	3278/4370/6555
Cut-out (mm) 	/	/
Size (WxLxHmm)	1128x34x1500	1128x34x1500
N.W/PC (kgs)	1.97	1.97
Q'ty/CTN (pcs)	8	8

LINEAR LIGHT

LINEAR LIGHT




FINISH: White Silver Black **CCT:** 3000K 4000K 5000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

LED LINEAR LIGHT High quality aluminum case with white or black coating. Black highlight grille, perfect anti-glare. Two installation methods: Suspending and surface mounted. Three light output modes: grille, floodlight, grille+floodlight module. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.


Dimension(mm)

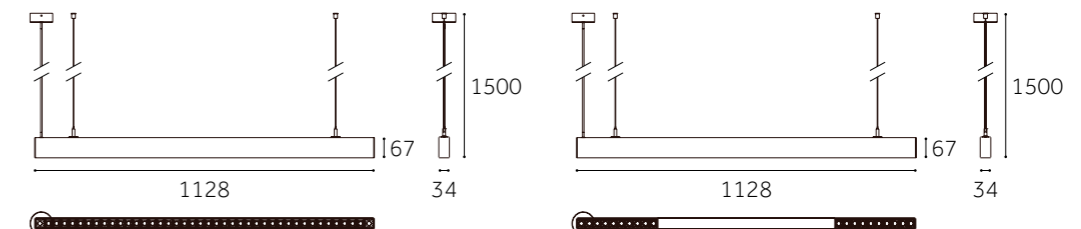


LAMPYHOTELOWE.PL

LED LINEAR LIGHT


SURFACE 

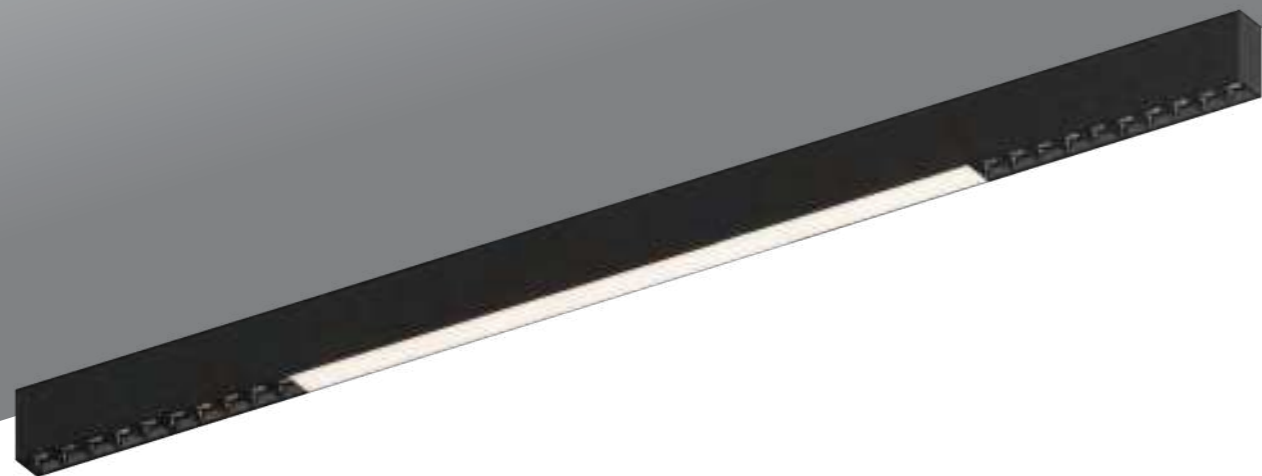

	LINE-A-EX1204-S	LINE-B-EX1204-S
Type	Fixed	Fixed
Wattage	30W/40W/60W	30W/40W/60W
Beam Angle	15°/30°/45°	15°+100°/30°+100°/45°+100°
Lumen (lm)	2933/3910/5865	3278/4370/6555
Cut-out (mm) 	/	/
Size (WxLxHmm)	1128x34x67	1128x34x67
N.W/PC (kgs)	1.85	1.85
Q'ty/CTN (pcs)	8	8

LINEAR LIGHT

LINEAR LIGHT




FINISH: White Silver Black **CCT:** 3000K 4000K 6000K


DIMMING: Triac 1-10V DALI Smart lighting

LED LINEAR LIGHT High quality aluminum case with white or black coating. Black highlight grille, perfect anti-glare. Two installation methods: Suspending and surface mounted. Three light output modes: grille, floodlight, grille+floodlight module. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.

Dimension(mm)

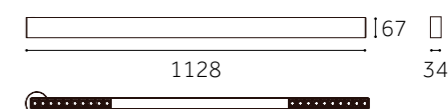

LAMPYHOTELOWE.PL

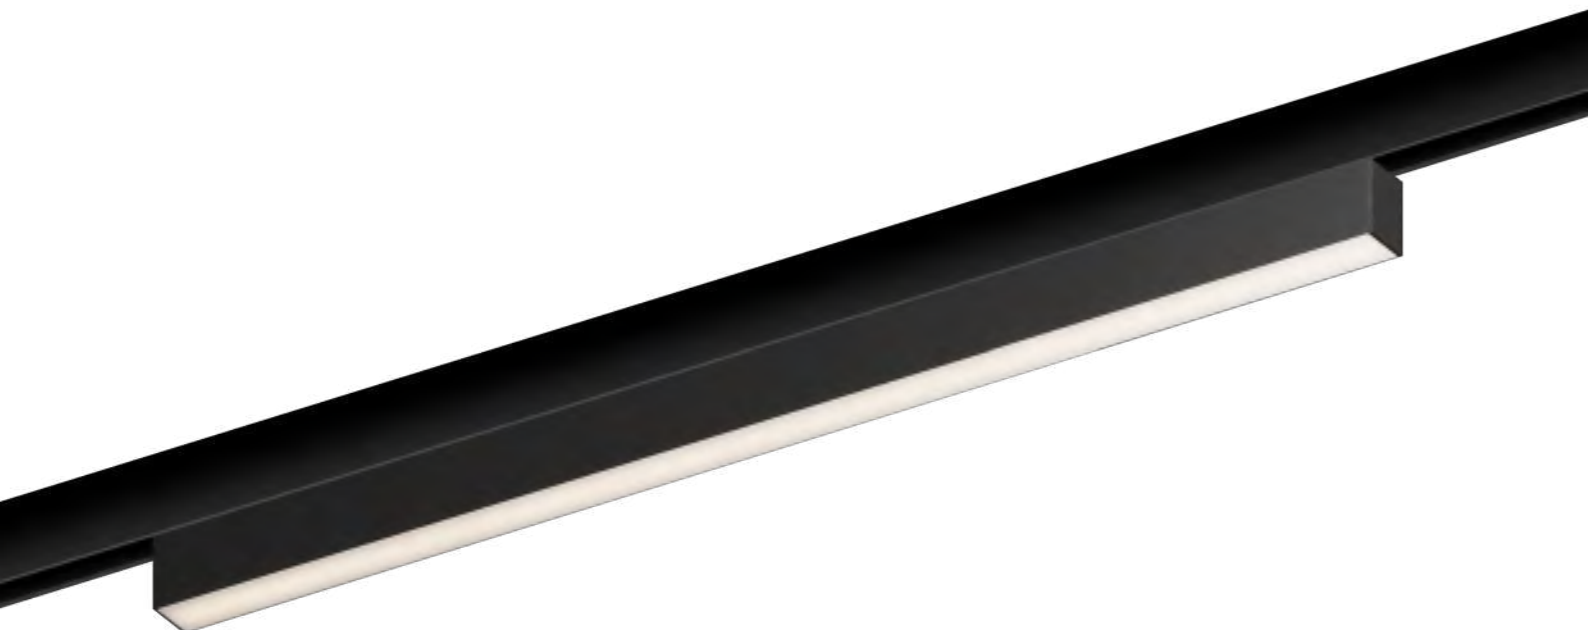


LINE-TR1205-S

Type	Fixed
Wattage	30W/40W/60W
Beam Angle	100°
Lumen (lm)	3450/4600/6900
Cut-out (mm) ⓘ	/
Size (WxLxHmm)	1200x50x71
N.W/PC (kgs)	2.35
Q'ty/CTN (pcs)	4

LINEAR LIGHT

LINEAR LIGHT




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting


LED LINEAR LIGHT High transmittance PC COVER, ageing resistance, non-yellowing. 0-355° degree rotatable, high quality Alumium shell. Widely used in hotels, restaurants, shops, offices and so on.

Dimension(mm)

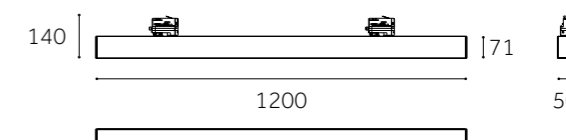

LED LINEAR LIGHT

PENDANT 

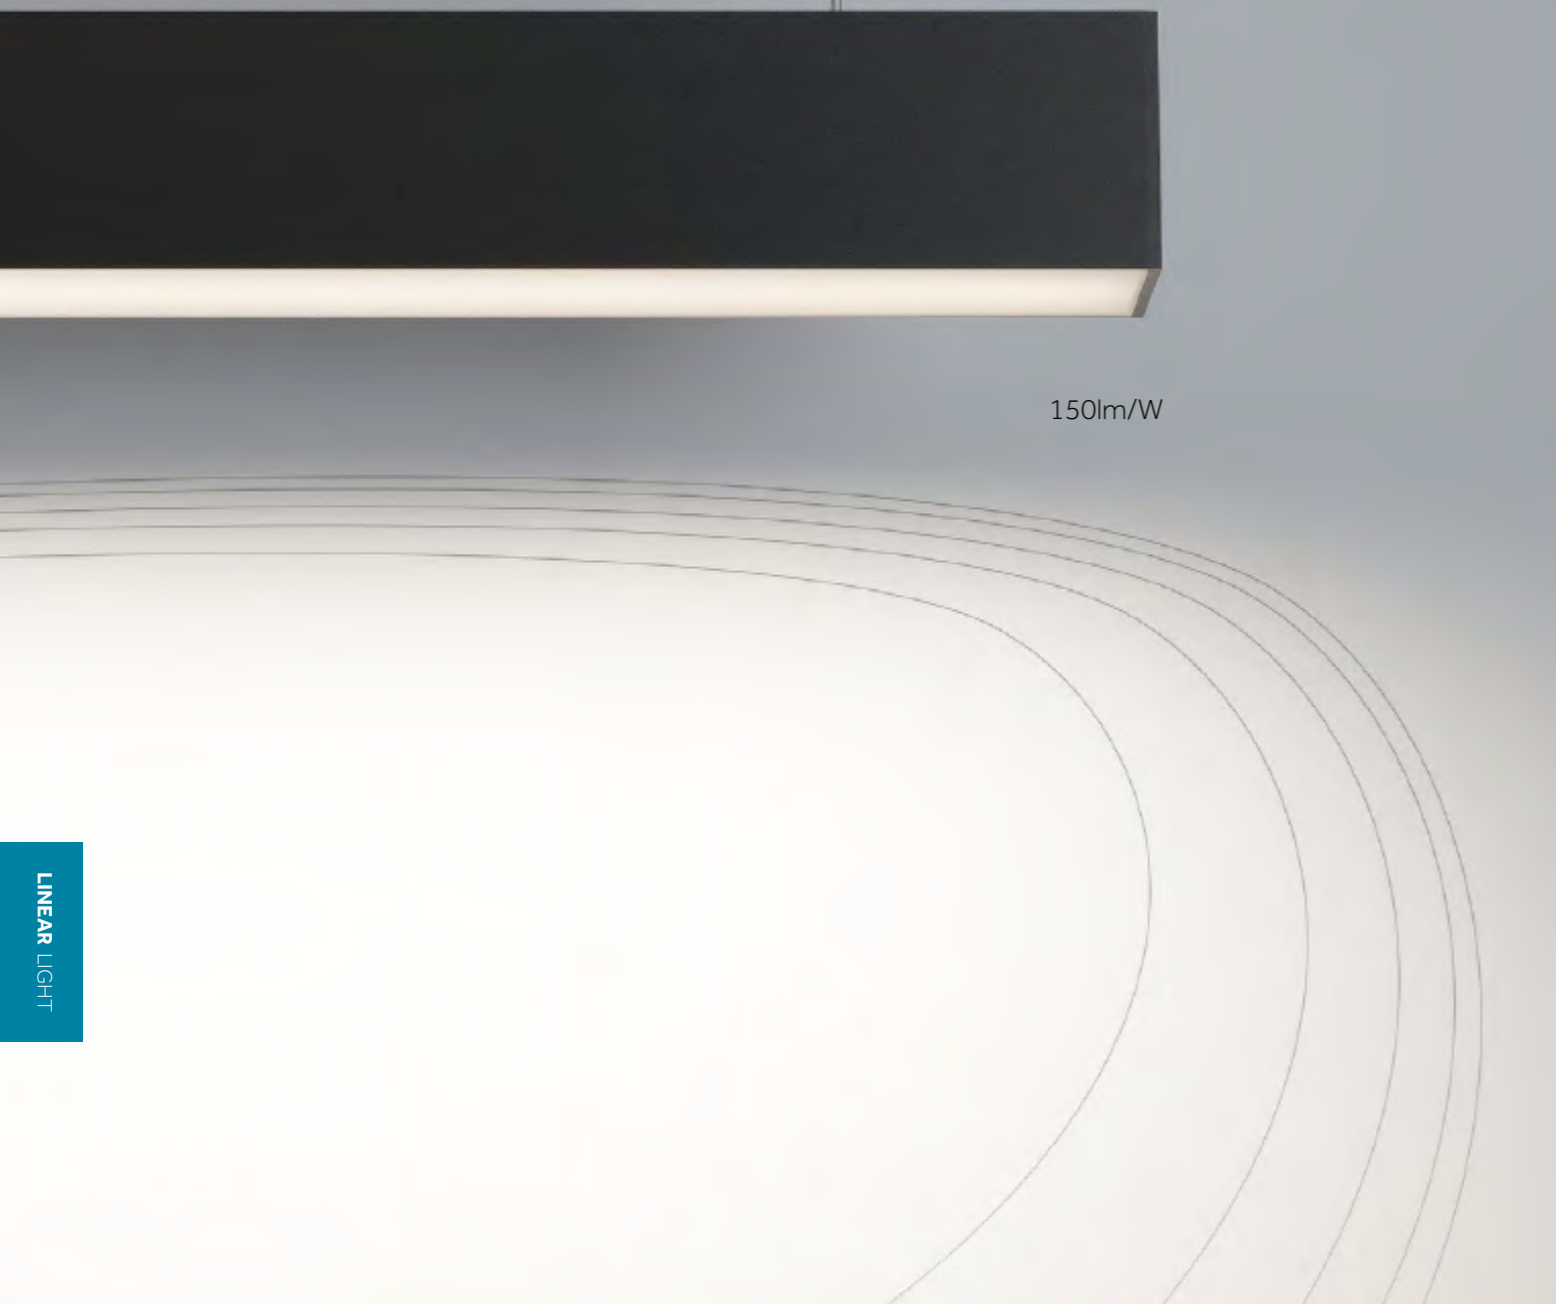


150lm/W

	LINE-SL1205-S	LINE-EX1205-S
Type	Fixed	Fixed
Wattage	30W/40W/60W	30W/40W/60W
Beam Angle	100°	100°
Lumen (lm)	3450/4600/6900	3450/4600/6900
Cut-out (mm) 	/	/
Size (WxLxHmm)	1200x50x1500	1200x50x71
N.W/PC (kgs)	2.4	2.3
Q'ty/CTN (pcs)	6	6

LINEAR LIGHT

LINEAR LIGHT




FINISH: White Silver Black **CCT:** 3000K 6000K


DIMMING: Triac 1-10V DALI Smart lighting


LED LINEAR LIGHT High quality aluminum case with white, black or gray coating. High light transmittance PMMA cover, anti-aging, non-yellowing. Widely used in hotels, restaurants, shops, offices, supermarkets, museums, residential lighting, etc.


Dimension(mm)

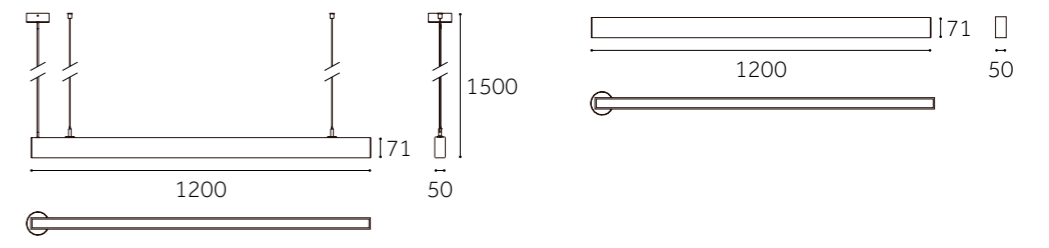

LAMPYHOTELOWE.PL



	BT-001-600	BT-001-1200	BT-002-1200
Type	Fixed	Fixed	Fixed
Wattage	20W	40W	60W
Beam Angle	120°	120°	110°
Lumen (lm)	2294	4763	7200
Cut-out (mm) 	/	/	/
Size (WxLxHmm)	600x65x67	1200x65x67	1200x82x70
N.W/PC (kgs)	0.97	1.5	1.78
Q'ty/CTN (pcs)	10	6	6




FINISH: White Silver Black **CCT:** 3000K 6000K

DIMMING: Triac 1-10V DALI Smart lighting

BT Series LED Batten Light with high efficiency LED Epistar chip, CRI>80, wide beam angle 120°. Easy selectable color temperature by DIP switch 3000K, 4000K, 5700K.

Dimension(mm)

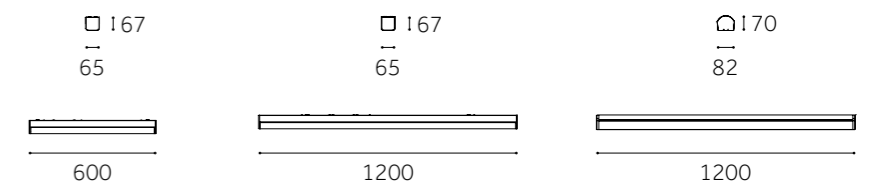



- **Philips/Lifud**
50000 hrs High Bay Driver
Constant current IP65 waterproof
- Special design with excellent heat dissipation
- High efficiency SMD LED chips reach 150lm/w
- **All Stainless**
Screws prevent oxidization



IP65 WATERPROOF DESIGN

HIGH BAY LIGHT

KD-006
LED HIGH BAY LIGHT

HIGH BAY LIGHT



LAMPYHOTELOWE.PL

KD-006 High Bay Series


PENDANT / SURFACE  



KD-006-S

Type	Fixed				
Wattage	80W	100W	135W	150W	200W
Beam Angle	120°				
Lumen (lm)	14835	17020	22540	25875	32005
Cut-out (mm) ⓘ	/				
Size (DxHmm)	Ø265x170	Ø265x170	Ø320x175	Ø320x175	Ø380x175
N.W/PC (kgs)	2.6	2.6	3.5	3.5	4.5
Q'ty/CTN (pcs)	1				

HIGH BAY LIGHT




FINISH: ● Black

CCT: 3000K  6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

KD-006 Series LED high bay light with high efficiency SMD LED chip, external driver. Die-casting aluminum housing and heat sink. Powder coated finish. IP65 waterproof driver fitted for exterior use. Available to use accessories: bracket or steel chain.


Dimension(mm)

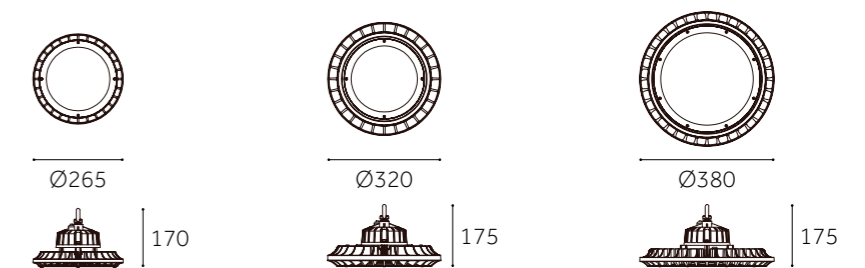

HIGH BAY LIGHT



LAMPYHOTELOWE.PL

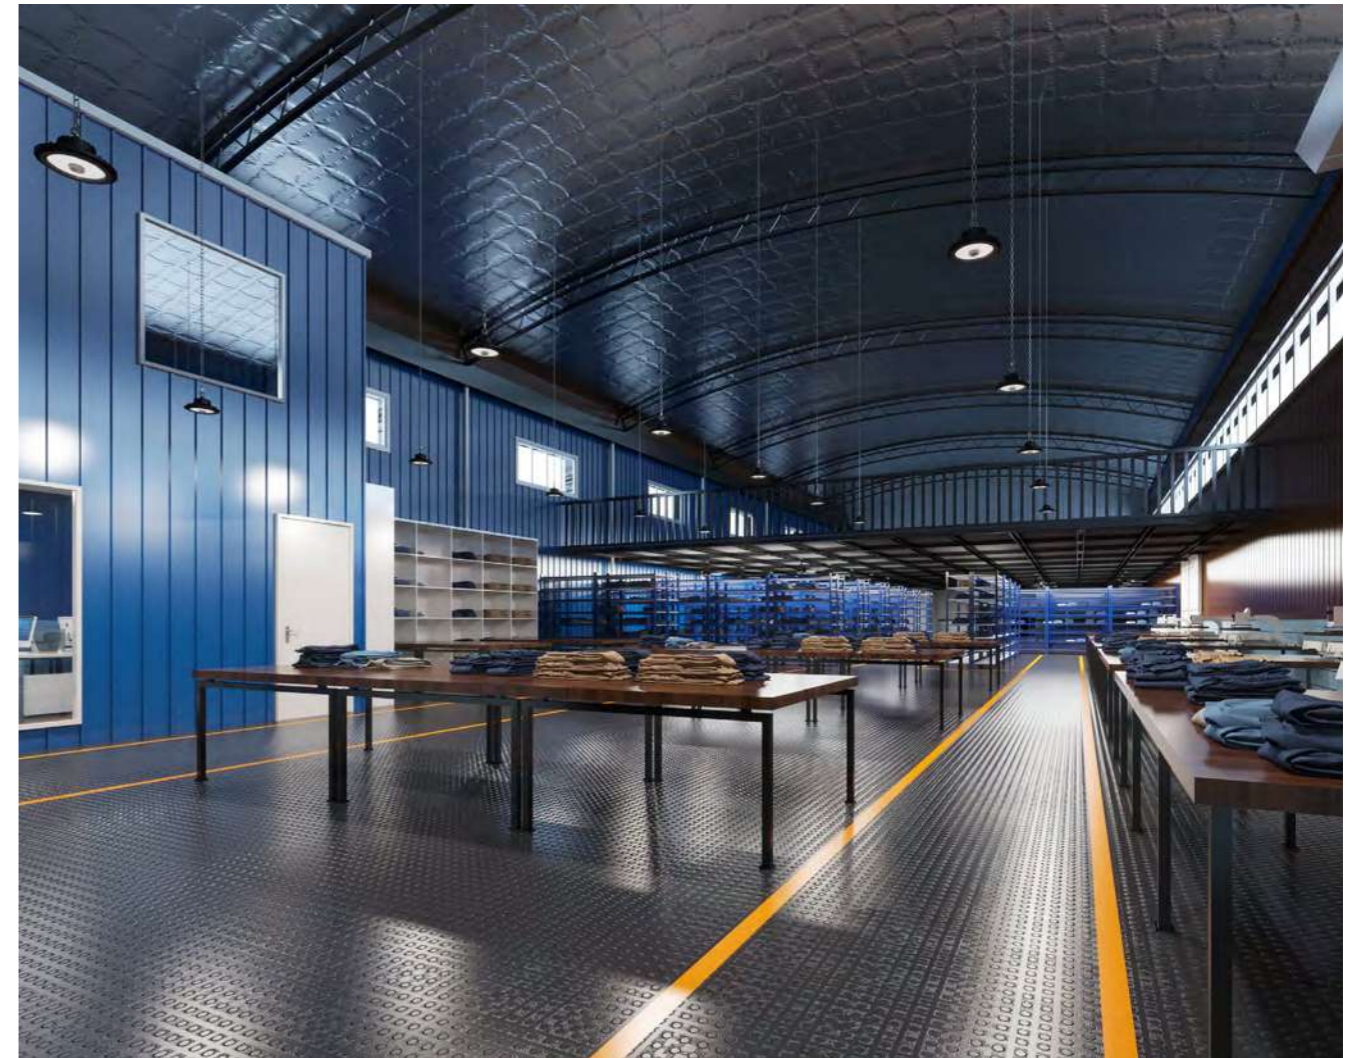

HIGH
LUMEN
CHIP



Superior heat emission structure with patented technology and power supply configuration, the light can work efficiently and safely.

KD-007


LED HIGH BAY LIGHT



BDHB-S-A

BDHB-S-B

Type	BDHB-S-A			BDHB-S-B		
	Fixed			Fixed		
Wattage	100W	150W	180W	100W	150W	180W
Beam Angle	120°			120°		
Lumen (lm)	17480	25415	28750	17480	25415	28750
Cut-out (mm) ⓘ	/			/		
Size (DxHmm)	Ø380x170		Ø380x200	Ø380x187		
N.W/PC (kgs)	6.2	6.2	6.5	5.8	6.1	7.0
Q'ty/CTN (pcs)	1			1		




FINISH: ● Black

CCT: 3000K  6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

BDHB Series LED high bay light with high efficiency SMD LED chip, external driver. Die-casting aluminum housing and heat sink. Powder coated finish. IP65 waterproof driver fitted for exterior use. Available to use accessories: bracket or steel chain.

Dimension(mm)

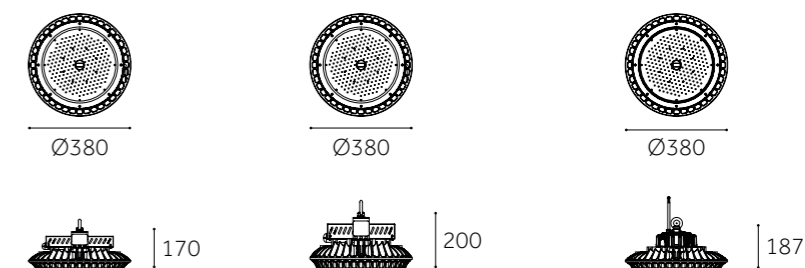

KD-003 High Bay Series

PENDANT / SURFACE  




KD-003-S

KD-003-C

	KD-003-S	KD-003-C
Type	Fixed	Fixed
Wattage	195W/225W/255W/285W	195W/225W/255W/285W
Beam Angle	100°	38°/60°
Lumen (lm)	27945/35075/41745/43240	18630/21965/24840/28980
Cut-out (mm) ⓘ	/	/
Size (DxHmm)	Ø450x270	Ø450x270
N.W/PC (kgs)	10	10
Q'ty/CTN (pcs)	1	1

HIGH BAY LIGHT



FINISH: ● Black

CCT: 3000K  6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ Smart lighting

KD-003 Series LED high bay light with high efficiency SMD LED chip, external driver. Die-casting aluminum housing and heat sink. Powder coated finish. IP65 waterproof driver fitted for exterior use. Available to use accessories: bracket or steel chain.


Dimension(mm)



HIGH BAY LIGHT



LAMPYHOTELOWE.PL

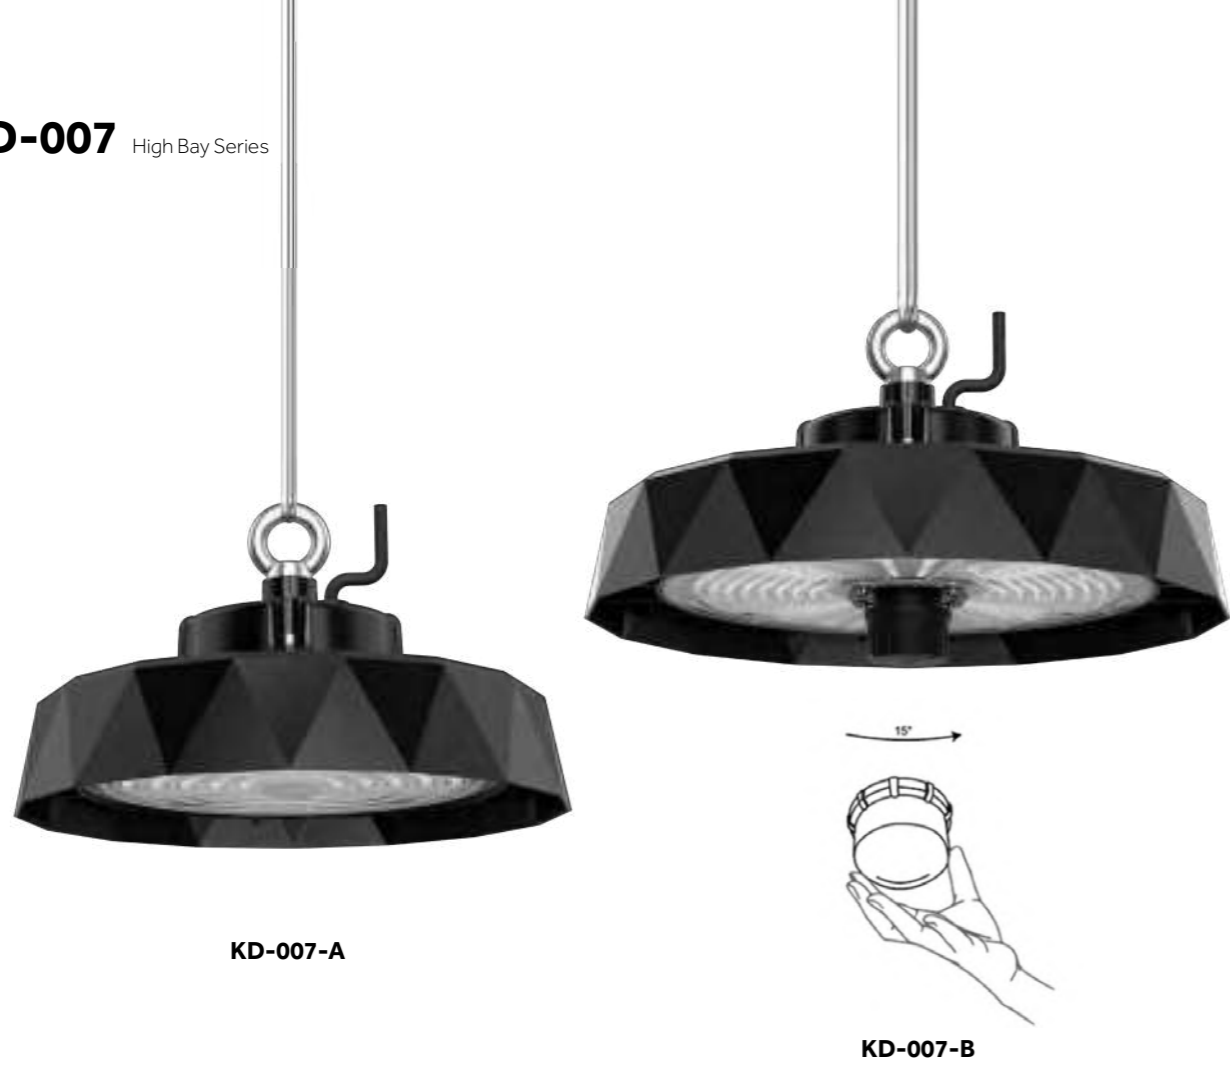

KD-007-A

KD-007-B

Type	KD-007-A				KD-007-B			
	Fixed				Fixed			
Wattage	100W	150W	200W	240W	100W	150W	200W	240W
Beam Angle	60°/90°/120°				60°/90°/120°			
Lumen (lm)	15000	22500	30000	36000	15000	22500	30000	36000
Cut-out (mm)	/				/			
Size (DxHmm)	Ø262x175	Ø301x175	Ø350x175	Ø350x175	Ø262x175	Ø301x175	Ø350x175	Ø350x175



Hook



Motion Sensor



PIR Sensor



Zigbee Controller




Tuya Controller

FINISH: ● Black


CCT: 3000K  6000K

DIMMING: Triac 1-10V DALI Smart lighting

KD-007 Series Inspired by diamonds, the KD007 has a heavy and unique style. Smart thermal design, economic prices, its will be a popular UFO style. Keeping the drive away from the heat sink body, improve the lifetime of the drive. Vent inside, balancing atmosphere pressure and avoiding moisture.



Dimension(mm)

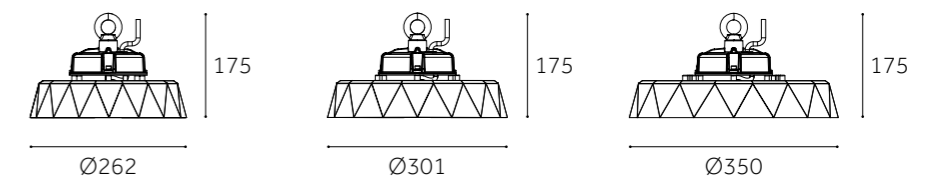



MAGNET


LED Track System

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



LAMPYHOTELOWE.PL

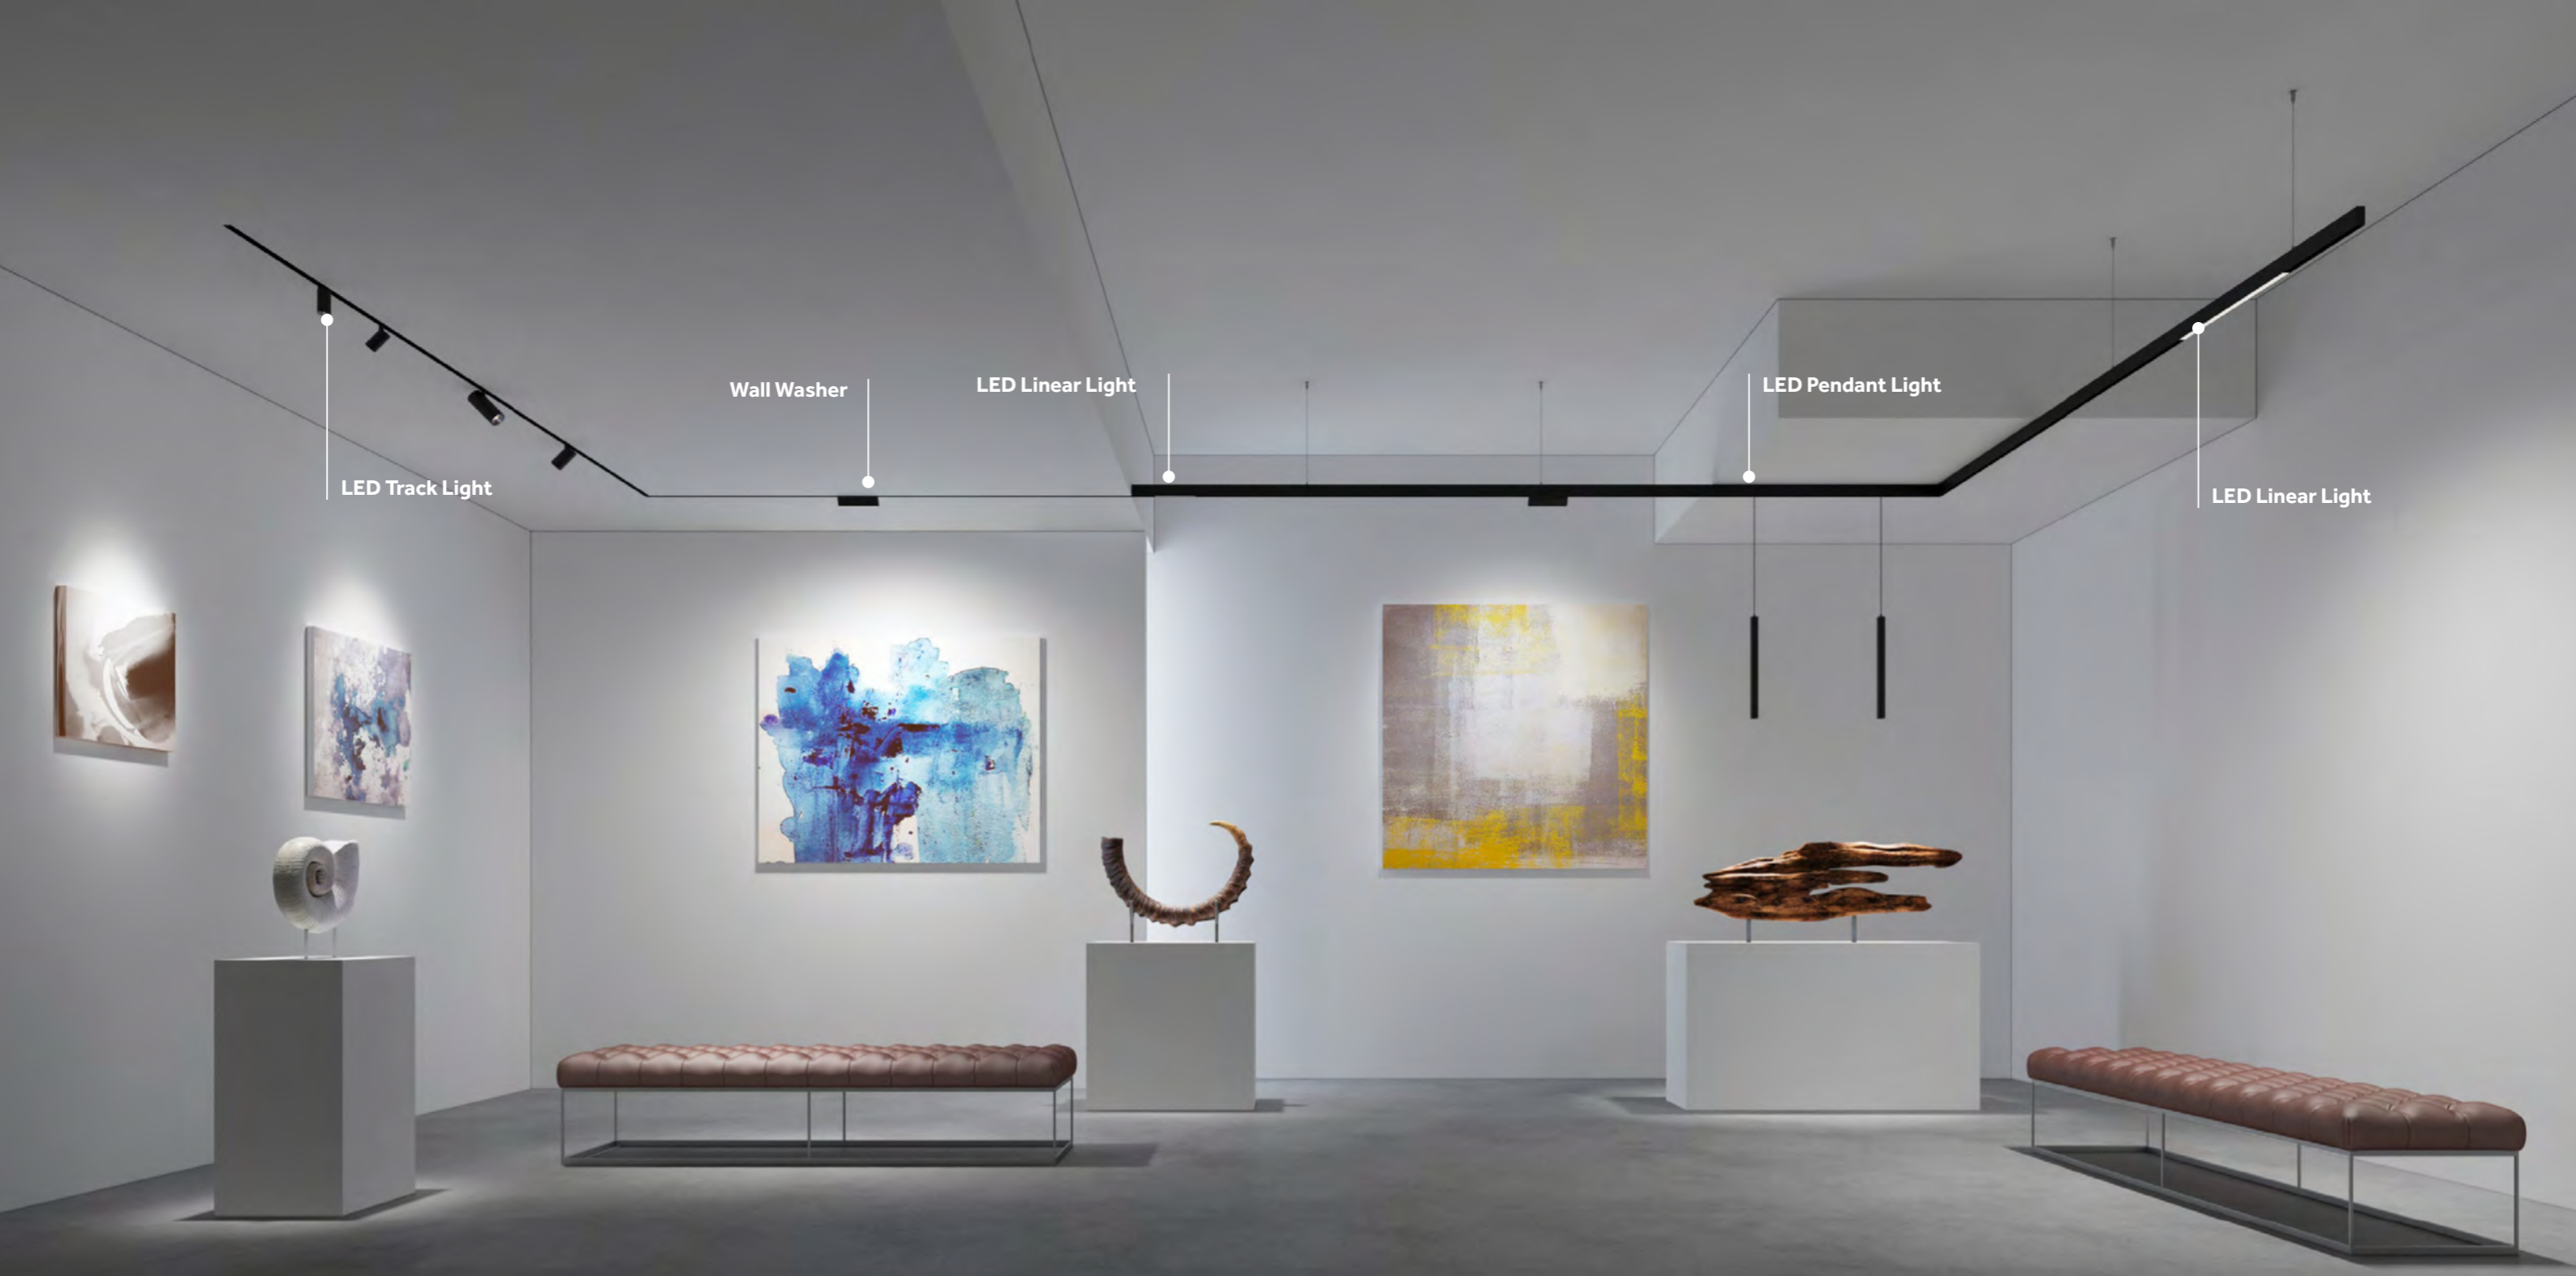

LED Track Light

Wall Washer

LED Linear Light

LED Pendant Light

LED Linear Light

CCT: 3000K 6000K

On the whole track, different lamps are fixed in place by magnetic force, does not require any tools to install. Rotate and slide to any point position, adjust at any time.

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

Die-casting aluminium profile with 25mm/50mm width groove; for recessed/ceiling surface mounting or suspended mounting; Track Rail available with standard lengths 1000mm and 2000mm.

1000mm


2000mm

Different insets are held in place by magnetic force along the entire track. No tools are needed to install them. Rotate, slide into any position, and adjust at any time – all it takes is one hand movement to highlight objects according to requirements.



OBS-601

DC24V Magnetic



OBS-603

DC48V Magnetic



Push

Click



Push

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



LAMPYHOTELOWE.PL

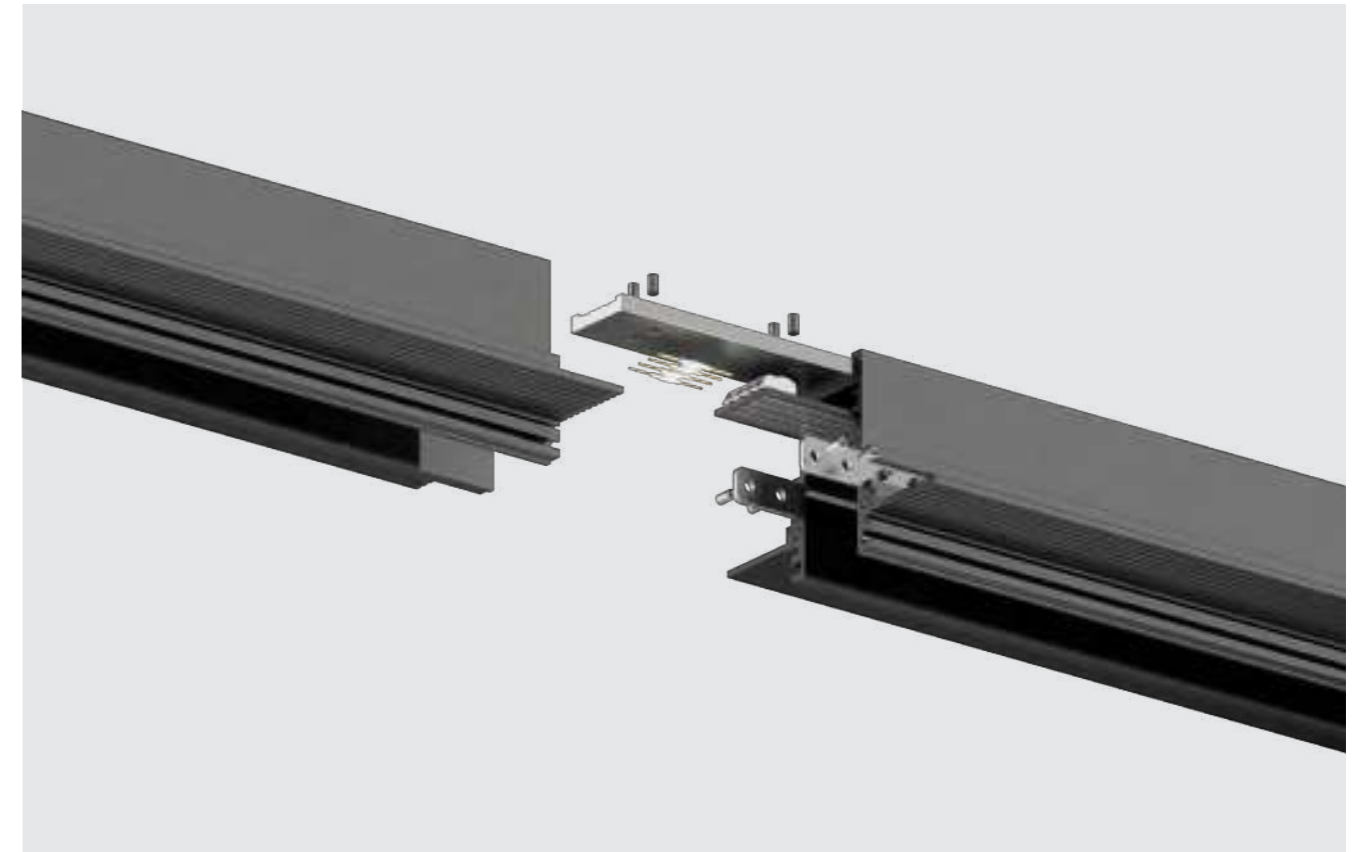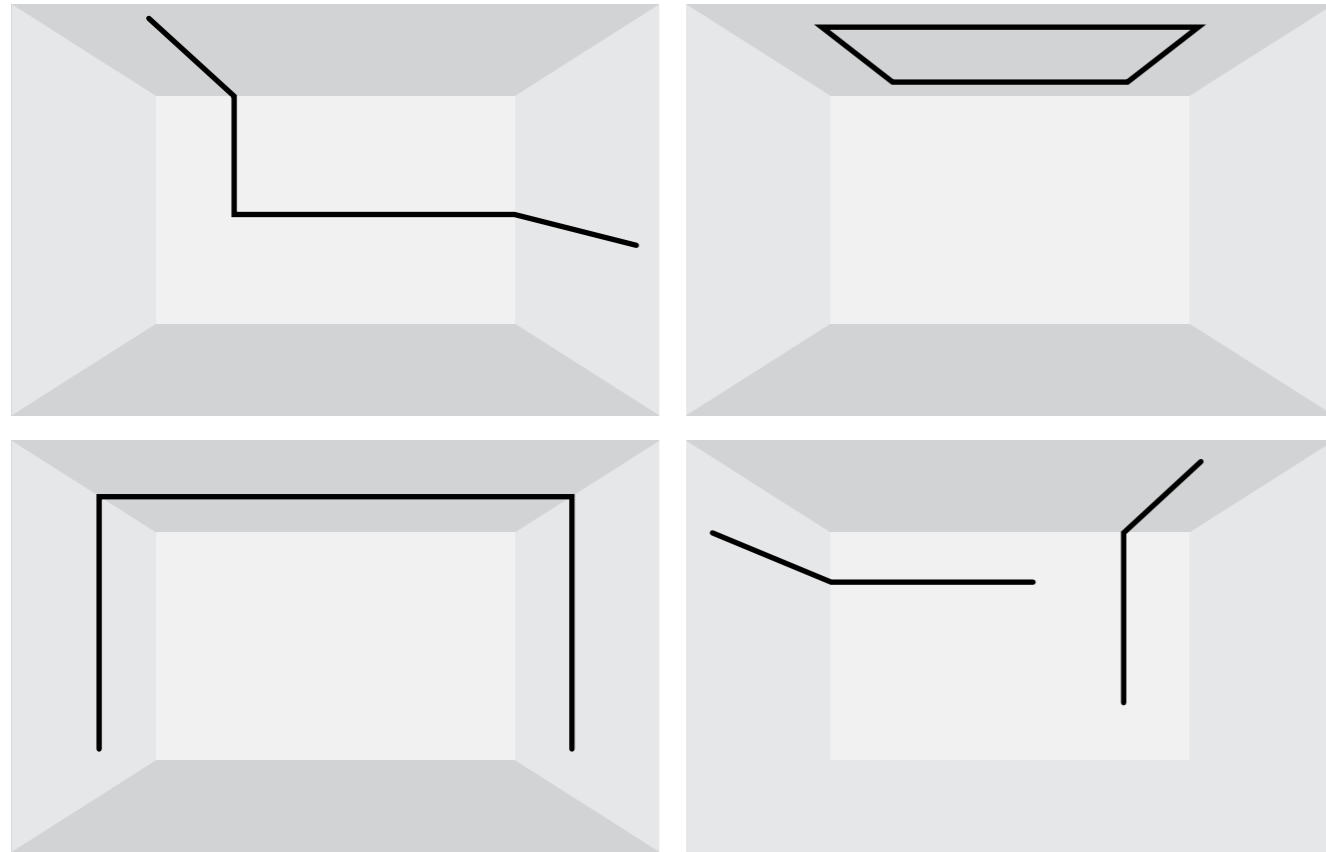

Flexibility meets elegance


2.4G dimming available
Smart solution

wireless dimming




Maintain a stable connection

The copper wire is energized through the connector, which is not easy to fall off or poor contact




The rail magnet and the iron plate of the lamp body attract each other, and the installation can be stable with a click



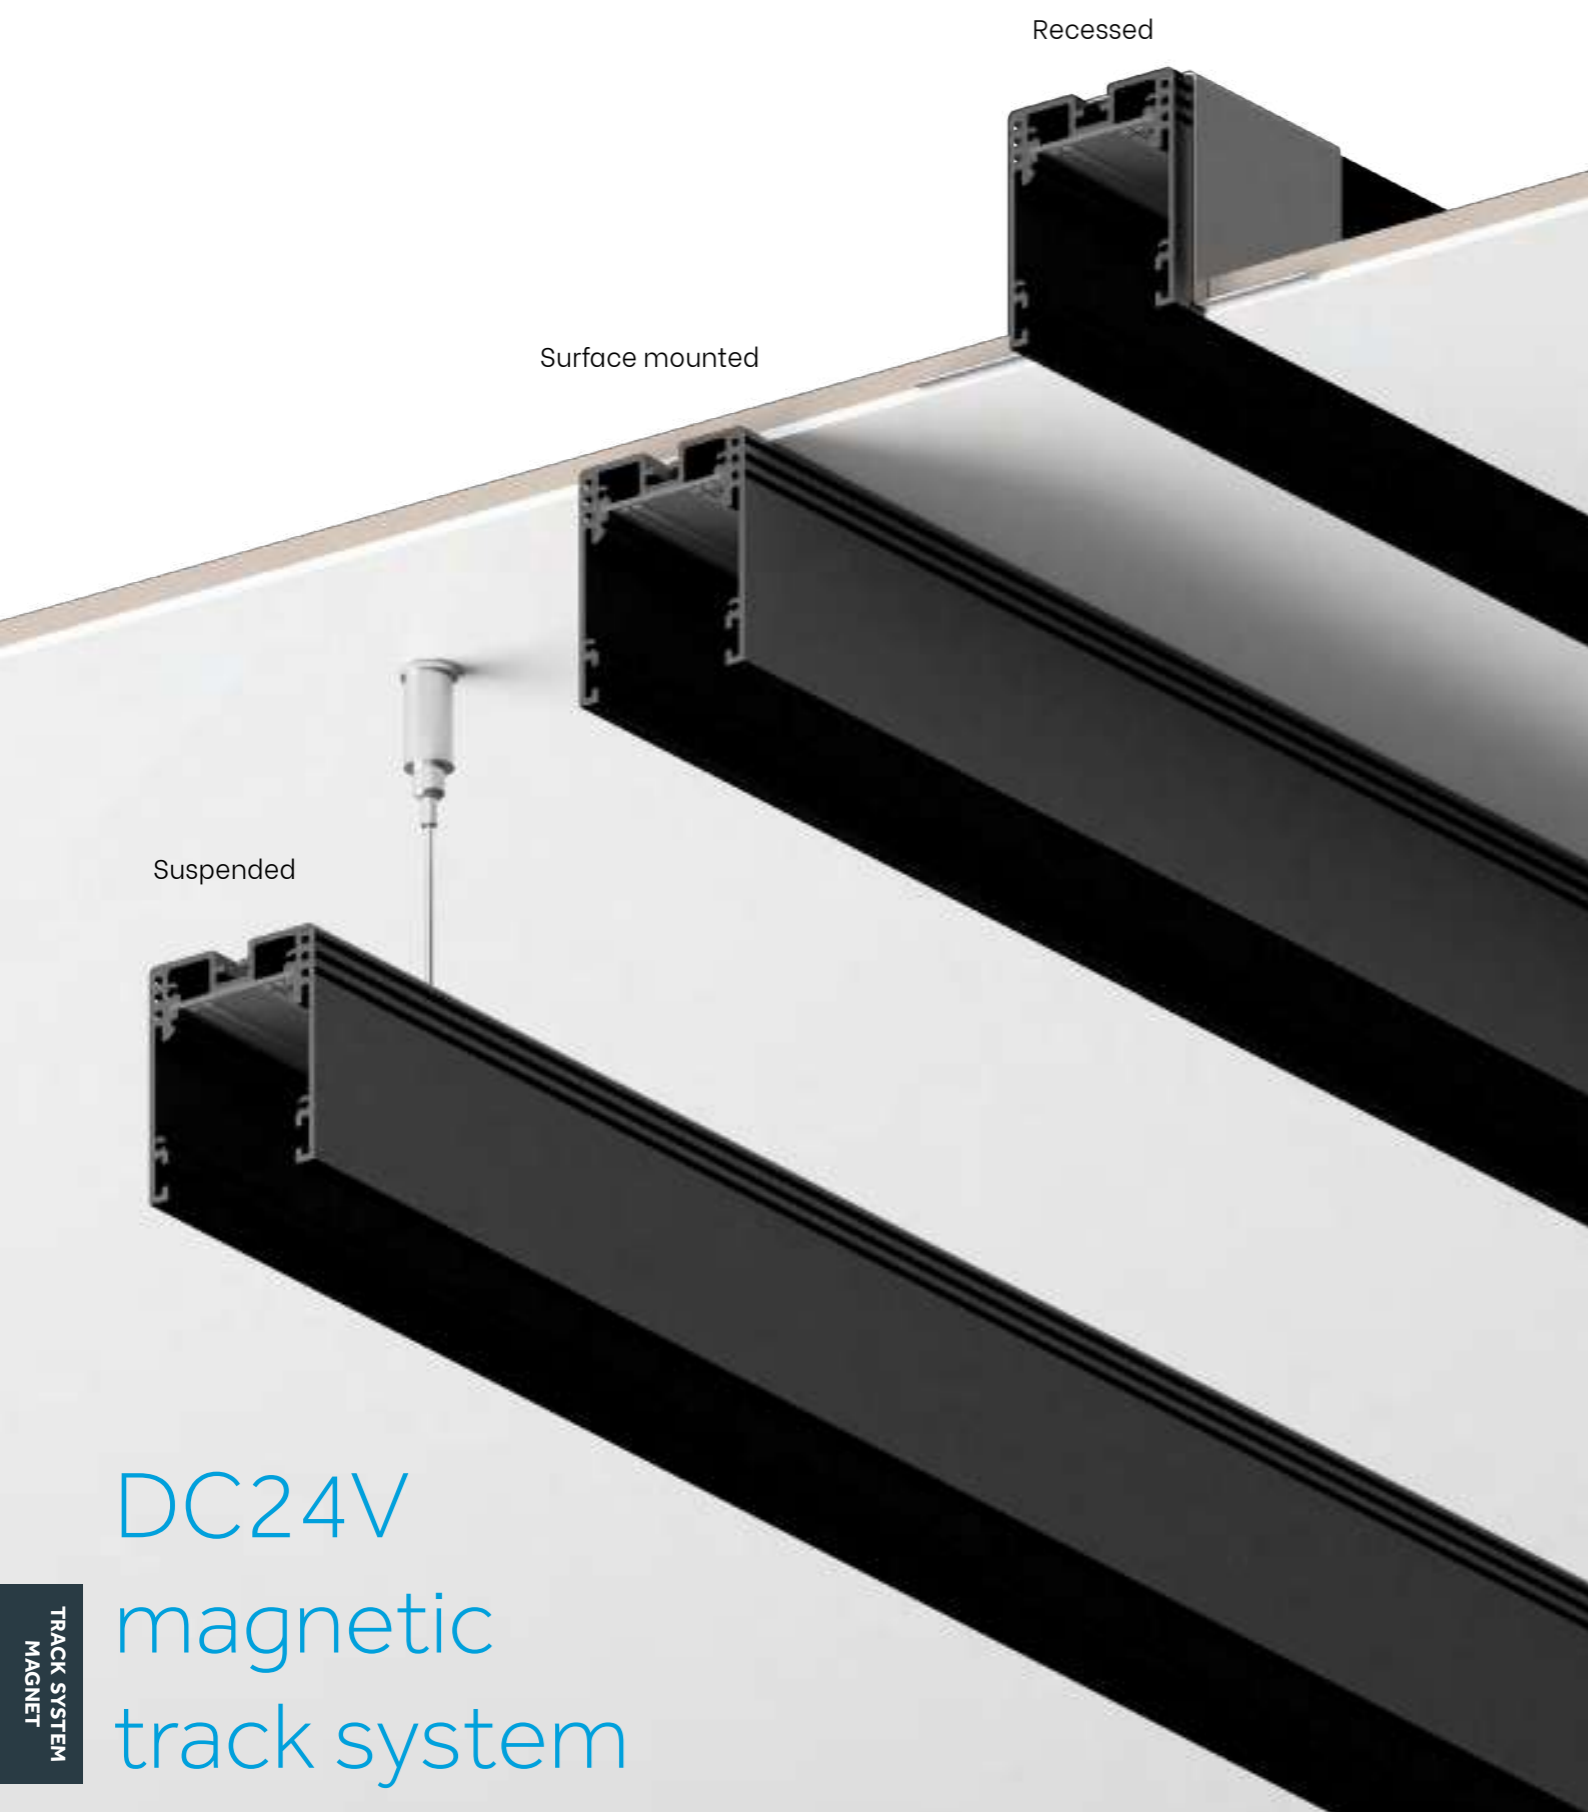

DC24V
magnetic
track system

OBS-601010
Trimless Recessed

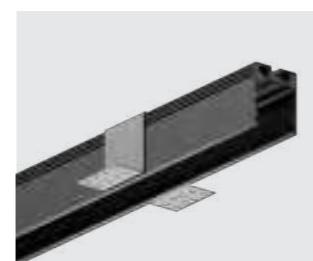

1000x51x63
N.W (kgs): 1.9 Q'ty (pcs): 8

OBS-601110
Surface mounted



1000x51x63
N.W (kgs): 1.9 Q'ty (pcs): 8

OBS-601310
Suspended



1000x51x63
N.W (kgs): 1.9 Q'ty (pcs): 8

● Black

2000x51x63
N.W (kgs): 3.8 Q'ty (pcs): 4

2000x51x63
N.W (kgs): 3.8 Q'ty (pcs): 4

2000x51x63
N.W (kgs): 3.8 Q'ty (pcs): 4

● Black

OBS-601901
90° (Corner)



200x200
N.W (kgs): 0.5 Q'ty (pcs): 20


OBS-601902
90° (Inner corner)




200x200
N.W (kgs): 0.6 Q'ty (pcs): 20

● Black

2.4GHZ



	OBS-601201-C	OBS-601202-C	OBS-601203-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	7W	12W	20W
Beam Angle	24°/36°	16°/24°/36°	16°/24°/36°
Lumen (lm)	322	920	1058
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	100xØ38x75	100xØ60x110	100xØ75x140
N.W/PC (kgs)	0.2	0.4	0.7
Q'ty/CTN (pcs)	32	16	32






FINISH: ● Black

CCT: 3000K 6000K


DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ 2.4G


OBS-601 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

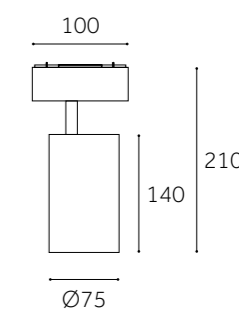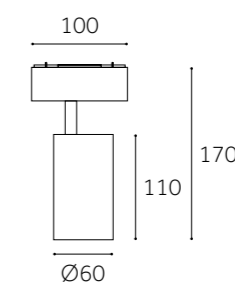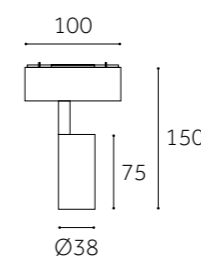



	OBS-601201-1-C	OBS-601202-1-C	OBS-601203-1-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	10W	20W	30W
Beam Angle	16°/26°/36°	16°/26°/36°	16°/26°/36°
Lumen (lm)	931.5	2002	2275
Cut-out (mm) 	/	/	/
Size (DxHmm)	100xØ50x214.5	100xØ60x214.5	100xØ70x214.5
N.W/PC (kgs)	0.25	0.4	0.53
Q'ty/CTN (pcs)	30	16	12




FINISH: ● Black

CCT: 3000K  6000K


DIMMING:  Triac  1-10V  DALI  2.4G


OBS-601 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

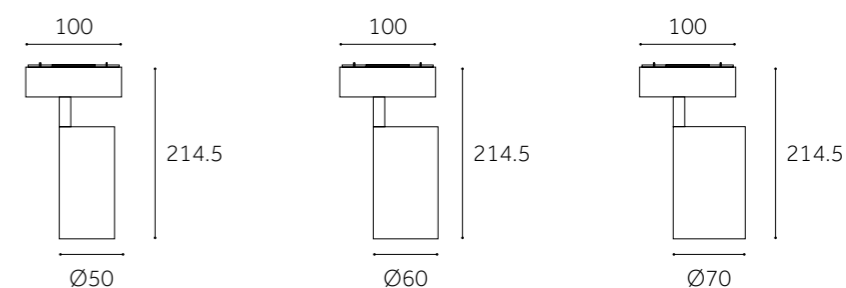



	OBS-601211-C	OBS-601212-C	OBS-601213-C
Type	Fixed	Fixed	Fixed
Wattage	12W	24W	36W
Beam Angle	120°	120°	120°
Lumen (lm)	955	1909	2806
Cut-out (mm) 	/	/	/
Size (WxLxHmm)	337x38.5x50	667x38.5x50	997x38.5x50
N.W/PC (kgs)	0.3	0.7	1
Q'ty/CTN (pcs)	32	16	9




FINISH: ● Black

CCT: 3000K  6000K

DIMMING:  Triac  1-10V  DALI  2.4G


OBS-601 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

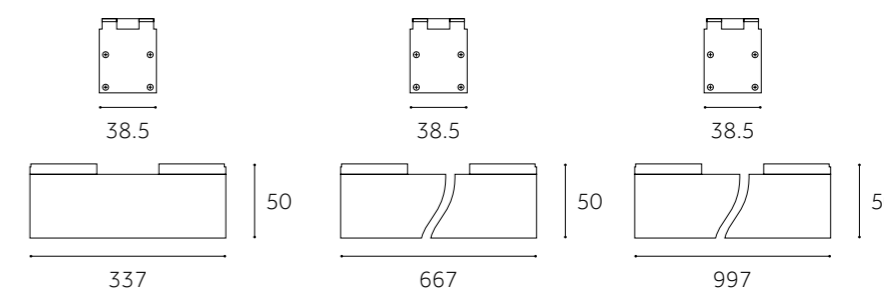



	OBS-601221-C	OBS-601223-C	OBS-601225-C	OBS-601231-C
Type	Fixed	Fixed	Fixed	Fixed
Wattage	10W	25W	40W	3W
Beam Angle	15°/30°/45°	15°/30°/45°	15°/30°/45°	15°/30°/45°
Lumen (lm)	460	1426	2243	127
Cut-out (mm)	/	/	/	/
Size (WxLxHmm)	137x38.5x50	402x38.5x50	667x38.5x50	39x39x50
N.W/PC (kgs)	0.2	0.5	0.8	0.05
Q'ty/CTN (pcs)	48	16	16	160




FINISH: ● Black

CCT: 3000K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ 2.4G


OBS-601 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

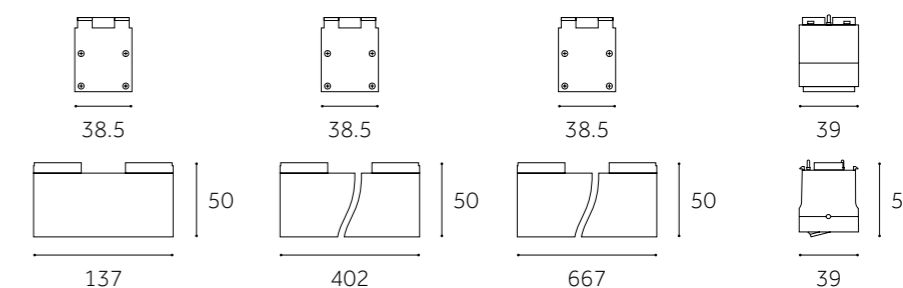

2.4GHZ



	OBS-601251-C	OBS-601252-C
Type	Adjustable 90°	Adjustable 90°
Wattage	10W	10W
Beam Angle	15°/30°/45°	120°
Lumen (lm)	397	531
Cut-out (mm) 	/	/
Size (WxLxHmm)	136.5x34x167	136.5x34x167
N.W/PC (kgs)	0.17	0.17
Q'ty/CTN (pcs)	20	20




FINISH: ● Black

CCT: 3000K  6000K

DIMMING:  Triac  1-10V  DALI  2.4G

OBS-601 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

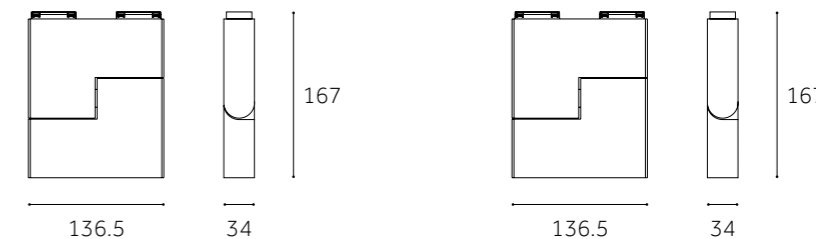



TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET

2.4GHZ

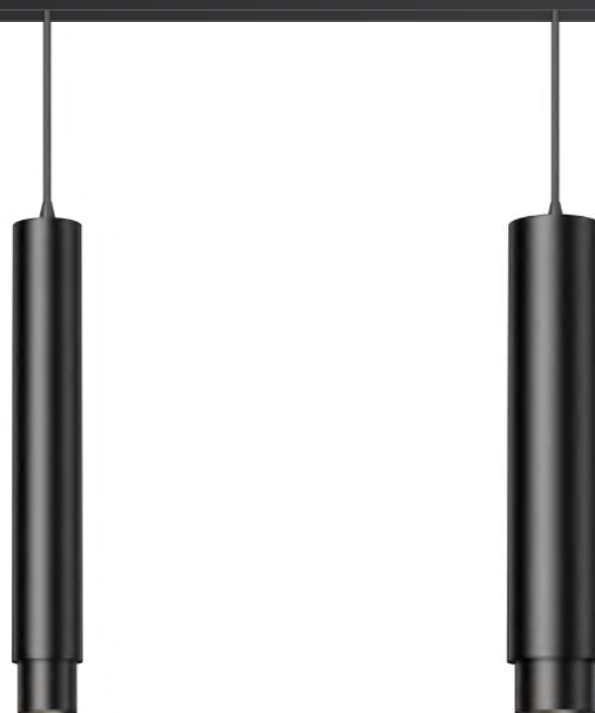

	OBS-601241-C	OBS-601242-C
Type	Fixed	Fixed
Wattage	10W	20W
Beam Angle	20°-50°	20°-50°
Lumen (lm)	428	1257
Cut-out (mm) 	/	/
Size (DxHmm)	100xØ55x375	100xØ75x375
N.W/PC (kgs)	0.8	2.1
Q'ty/CTN (pcs)	16	9





FINISH: ● Black



CCT: 3000K  6000K

DIMMING:  Triac  1-10V  DALI  2.4G

OBS-601 Series is a DC24V magnetic track system with width 50mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

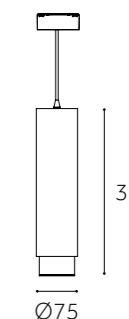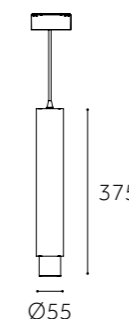

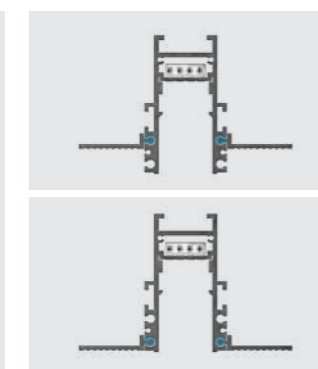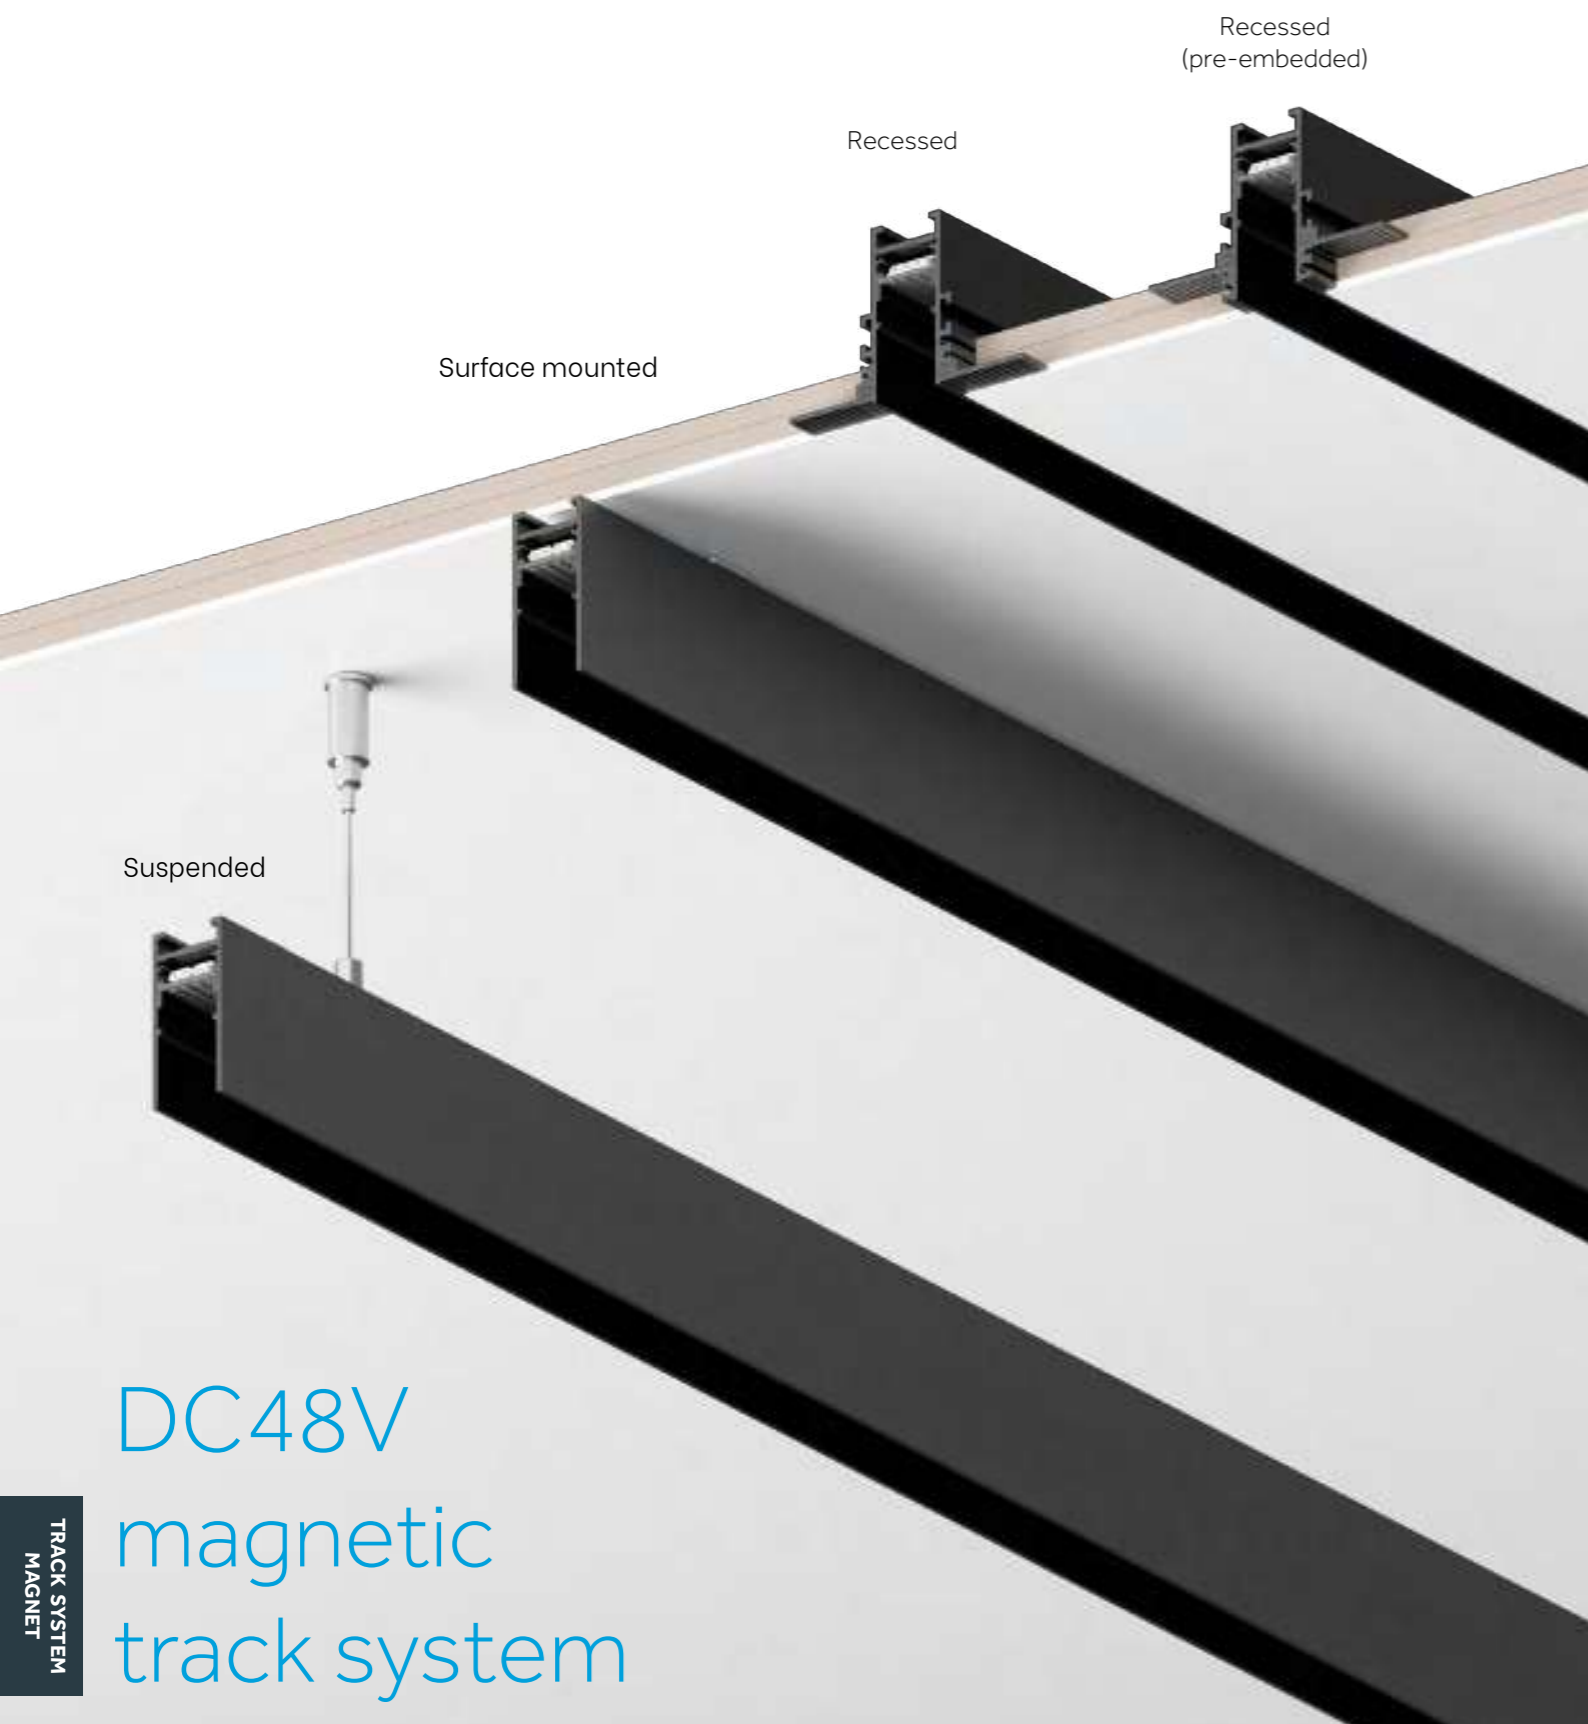

OBS-603010
Trimless Recessed



1000x85x55
N.W (kgs): 1.6 Q'ty (pcs): 9
Cut-out: 48x>65mm

OBS-603010
Trimless Recessed (pre-embedded)



1000x25x55
N.W (kgs): 1.2 Q'ty (pcs): 9
Cut-out: 48x>65mm

OBS-603110
Surface mounted



1000x25x55
N.W (kgs): 1.2 Q'ty (pcs): 9

OBS-603310
Suspended



1000x25x55 ● Black
N.W (kgs): 1.2 Q'ty (pcs): 9

2000x85x55
N.W (kgs): 3.1 Q'ty (pcs): 6
Cut-out: 48x>65mm

2000x25x55
N.W (kgs): 2.4 Q'ty (pcs): 6
Cut-out: 48x>65mm

2000x25x55
N.W (kgs): 2.4 Q'ty (pcs): 6

2000x25x55 ● Black
N.W (kgs): 2.4 Q'ty (pcs): 6

OBS-603901
90° (Recessed corner)



100x100
N.W (kgs): 0.4 Q'ty (pcs): 30
Cut-out: 48x>65mm

OBS-603902
90° (Recessed inner corner)




100x100
N.W (kgs): 0.3 Q'ty (pcs): 50
Cut-out: 48x>65mm

OBS-603903
90° (Surface corner)



100x100
N.W (kgs): 0.3 Q'ty (pcs): 50

OBS-603904
90° (Surface inner corner)



100x100 ● Black
N.W (kgs): 0.3 Q'ty (pcs): 50


DC48V
magnetic
track system

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



	OBS-603202-C	OBS-603203-C	OBS-603204-C
Type	Adjustable 90°+355°	Adjustable 90°+355°	Adjustable 90°+355°
Wattage	6W	9W	12W
Beam Angle	16°/24°/36°	16°/24°/36°	16°/24°/36°
Lumen (lm)	448	690	1150
Cut-out (mm) ⓘ	/	/	/
Size (DxHmm)	186xØ38.5x103.4	186xØ50x114.5	186xØ60x125
N.W/PC (kgs)	0.2	0.3	0.4
Q'ty/CTN (pcs)	24	24	24




FINISH: ● Black

CCT: 3000K 6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ 2.4G

OBS-603 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

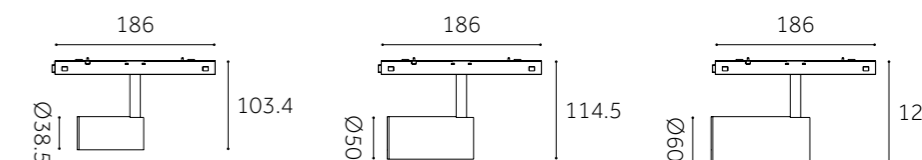

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



	OBS-603211-C	OBS-603212-C	OBS-603213-C
Type	Fixed	Fixed	Fixed
Wattage	6W	12W	18W
Beam Angle	120°	120°	120°
Lumen (lm)	253	495	782
Cut-out (mm) 	/	/	/
Size (WxLxHmm)	387x20x40	579x20x40	963x20x40
N.W/PC (kgs)	0.3	0.5	0.8
Q'ty/CTN (pcs)	25	25	25




FINISH: ● Black

CCT: 3000K  6000K

DIMMING:  Triac  1-10V  DALI  2.4G

OBS-603 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)

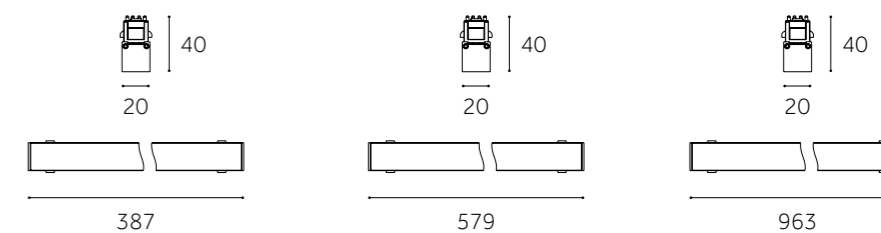

TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



	OBS-603222-C	OBS-603224-C
Type	Fixed	Fixed
Wattage	9W	18W
Beam Angle	12°/34°/55°	12°/34°/55°
Lumen (lm)	794	1300
Cut-out (mm) 	/	/
Size (WxLxHmm)	192x20x40	387x20x40
N.W/PC (kgs)	0.1	0.2
Q'ty/CTN (pcs)	40	25





FINISH: ● Black

CCT: 3000K  6000K

DIMMING:  Triac  1-10V  DALI  2.4G

OBS-603 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.


Dimension(mm)




TRACK SYSTEM
MAGNET

TRACK SYSTEM
MAGNET



	OBS-603251-C	OBS-603252-C
Type	Adjustable 90°	Adjustable 90°
Wattage	9W	9W
Beam Angle	12°/34°/55°	120°
Lumen (lm)	552	610
Cut-out (mm) 	/	/
Size (WxLxHmm)	195x20x82	195x20x82
N.W/PC (kgs)	0.4	0.4
Q'ty/CTN (pcs)	25	25





FINISH: ● Black

CCT: 3000K  6000K

DIMMING:  Triac  1-10V  DALI  2.4G

OBS-603 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

Dimension(mm)

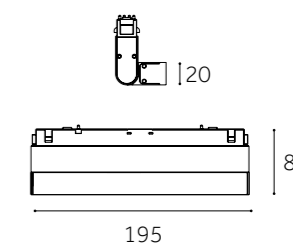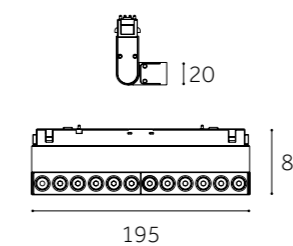

2.4GHZ



OBS-603241-C


Type	Fixed
Wattage	6W
Beam Angle	16°/24°/36°
Lumen (lm)	481
Cut-out (mm) ⓘ	/
Size (DxHmm)	186xØ38x495
N.W/PC (kgs)	0.8
Q'ty/CTN (pcs)	25

FINISH: ● Black


CCT: 3000K  6000K

DIMMING: ✓ Triac ✓ 1-10V ✓ DALI ✓ 2.4G

Dimension(mm)




OBS-603 Series is a DC48V magnetic track system with width 25mm, length 1m/2m optional. Smart solution 2.4G dimming available, 3 CCT changeable and dimmable. Flexible and easy for DIY installation.

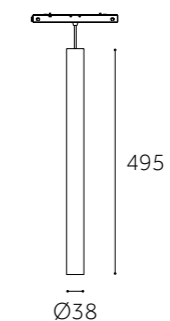



LAMPYHOTELOWE.PL

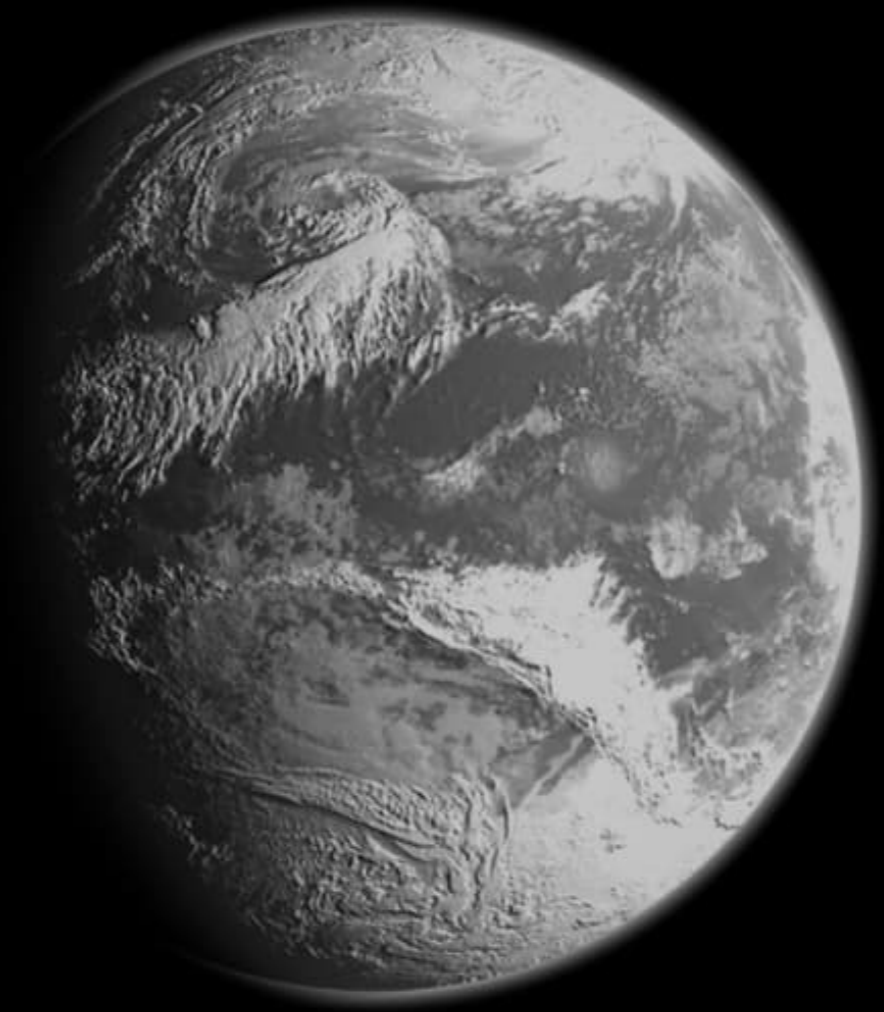

Modern Lighting Krzysztof Szyszka

61-625 Poznań

ul. Kłosowa 10

tel. +48 61 8219988

tel. 609540285

info@lampyhotelowe.pl

www.lampyhotelowe.pl